

Specifications:

Material And Finish:

Insulator:LCP UL94V-0 Color:Beige

Contact:Copper Alloy

Plated:See Ordering Information

Rating:

Current Rating:3.0 Amp

Voltage Rating:350V AC/DC

Operating Temperature Range:-40~+125°C

Electrical:

Contact resistance:20m Ohm Max

Insulator resistance:1000M ohm min.






Withstanding Voltage:500V AC/Minute

Ordering Information

A1501M-XXX-01-X


1 2 3 4 5

- 1:— Series No.
2:— M:SMT Type
3:— No. of Positions
4:— A:Gold Flash
H:Selective Gold Plated
Q:Tin Plated
5:— B:In Tube
C:In Tray
E:W/Cap In Tube
F:W/Cap In Tape&Reel

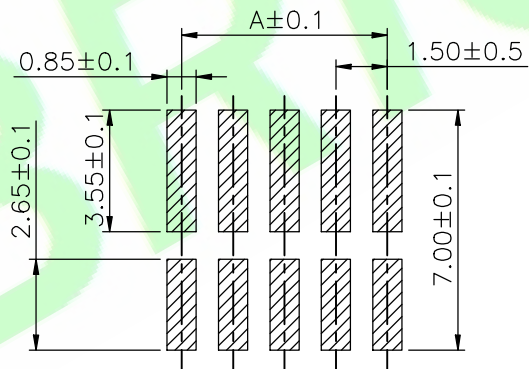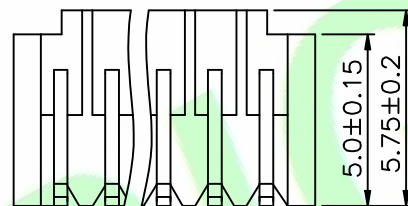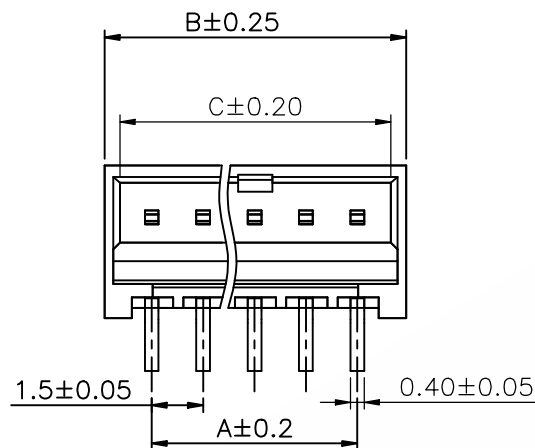

Recommended PCB Layout

Circuits	Dimensions		
	A	B	C
02	1.50	4.30	3.40
03	3.00	5.80	4.90
04	4.50	7.30	6.40
05	6.00	8.80	7.90
06	7.50	10.30	9.40
07	9.00	11.80	10.90
08	10.50	13.30	12.40
09	12.00	14.80	13.90
10	13.50	16.30	15.40
11	15.00	17.80	16.90
12	16.50	19.30	18.40
13	18.00	20.80	19.90
14	19.50	22.30	21.40
15	21.00	23.80	22.90

5X				DR.BY.: Samson	GENERAL TOLERANCE:		PART NO : A1501M-XXX-01-X	HJBRIGHT 東莞市華晶電子有限公司		
4X						LINEAR	ANGLES			
3X				CHKD.: Tony	x.: ±0.30	x': ±5.0°	TITLE : 1.50mm Pitch Wafer SMT Type	SHEET: 1/1		A4
2X					x.x: ±0.20	x.x': ±3.0°		SCALE: 1:1		
1X	ORIGINAL	Samson		APPD.: Billy	x.xx: ±0.15	x.xx': ±2.0°		DATE: 02-Jun-2008		
REV.	DESCRIPTION	DR.BY	ECN. NO.		x.xxx: ±0.10	x.xxx': ±1.0°				