

Specifications:
Material And Finish:
Insulator:LCP UL94V-0
Color:Natural
PIN:BRASS/Tin Plated

Rating.
Current Rating:4.0 Amp (#22AWG)
Voltage Rating:350V AC/DC
Operating Temperature Range:-40°~+125°C







Electrical:
Contact resistance:10m Ohm Max
Insulator resistance:1000M Ohm min.
Withstanding Voltage:1700V AC/Minute

Ordering Information


A1801H-02Q-02-G

1 2 3 4 5

- 1: — Series No.
2: — H:Horizontal SMT Type
3: — No. of Positions
4: — Q: Tin Plated
5: — G: W/O Cap In Tape & Reel

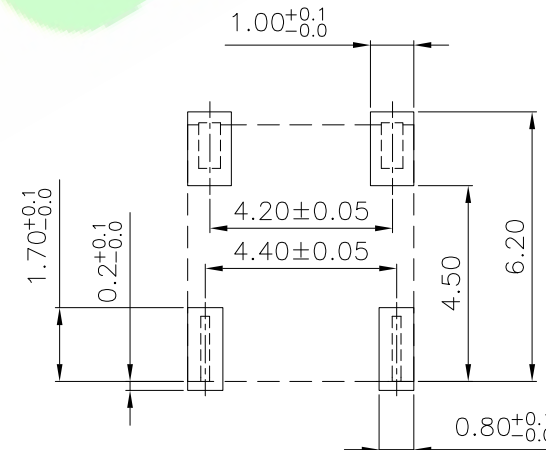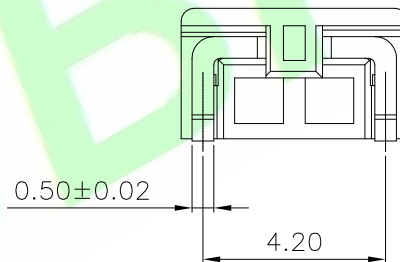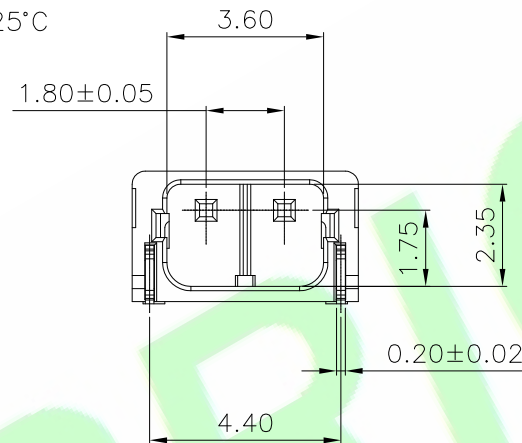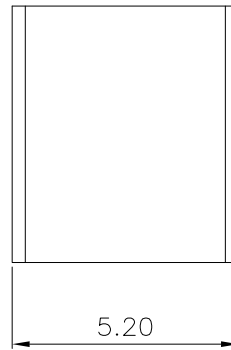

RECOMMENDED PCB LAYOUT

5X				DR.BY.: Pip	GENERAL TOLERANCE:		PART NO : A1801H-02Q-02-G	HJBRIGHT® 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED		SHEET: 1/1	 THIRD ANGLE PROJECTION	A4
4X				CHKD.: Aren	LINEAR	ANGLES	DWG. NO.:					
3X				APPD.: Billy	X.: ±0.30	X': ±5.0°	TITLE : 1.8mm Wafer	DATE: 10-Oct-2019		SCALE: 1:1		
2X					X.X: ±0.20	X.X': ±3.0°		UNIT: mm				
1X	ORIGINAL	Pip			X.XX: ±0.10	X.XX': ±2.0°						
REV.	DESCRIPTION	DR.BY	ECN. NO.		X.XXX: ±0.10	X.XXX': ±1.0°						