

RoHS Compliant

Specifications:

Material And Finish:

Insulator:PA66 UL94V-0 Color:Natural

Contact:Brass

Plated:See Ordering Information

Rating:

Current Rating:3 Amp



Voltage Rating:250V AC/DC

Operating Temperature Range:-40°~+105°C



Contact Resistance:15mΩ Max

Insulation Resistance:1000MΩ Min

Withstanding Voltage: 1500V AC/minute

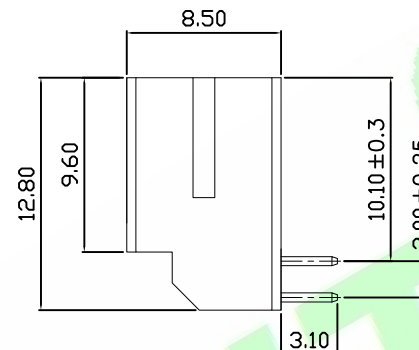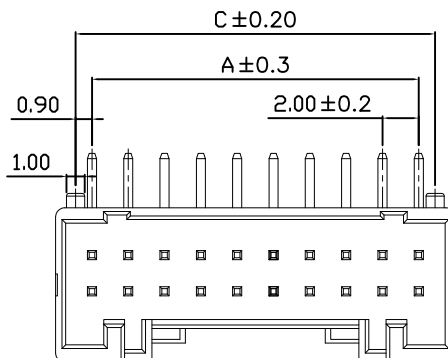

A: W/O Peg

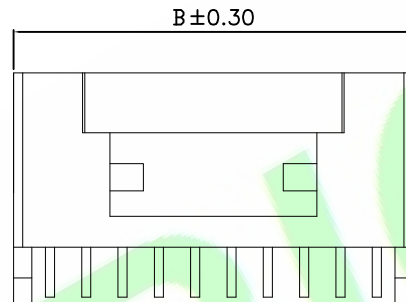

B: W/1 Peg


Ordering Information

A20012R-XXQ-01-XX


1 2 3 4 5 6

- 1: — Series No.
- 2: — R:R/A Type
- 3: — No. of Positions
- 4: — Q: Tin Plated
- 5: — A: W/O Peg
B: W/1 Peg
- 5: — A: In bag
B: In Tube
C: In Tray

Part No.	Dimension mm		
	A	B	C
8	6.00	10.00	7.80
10	8.00	12.00	9.80
12	10.00	14.00	11.80
14	12.00	16.00	13.80
16	14.00	18.00	15.80
18	16.00	20.00	17.80
20	18.00	22.00	19.80
22	20.00	24.00	21.80
24	22.00	26.00	23.80
26	24.00	28.00	25.80
28	26.00	30.00	27.80
30	28.00	32.00	29.80
32	30.00	34.00	31.80
34	32.00	36.00	33.80
36	34.00	38.00	35.80
38	36.00	40.00	37.80
40	38.00	42.00	39.80

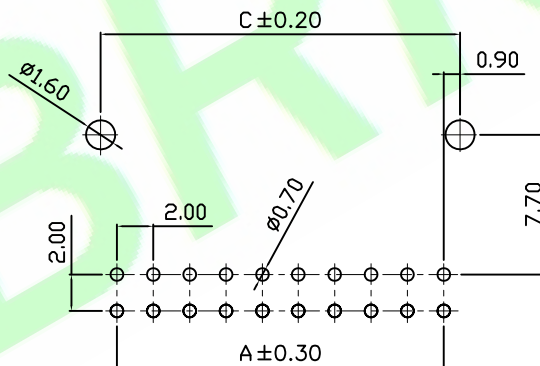


P.C.B LAYOUT

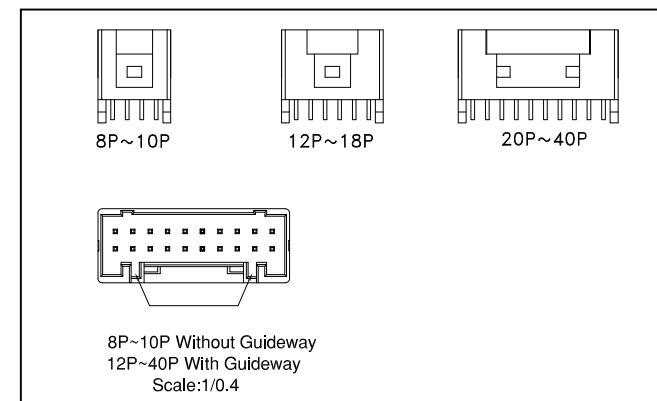

5X			DR.BY.: Judyyan	GENERAL TOLERANCE:		PART NO : A20012R-XXQ-01-XX	
4X			CHKD.: Tony	LINEAR	ANGLES	DWG. NO.:	
3X			APPD.: Billy	x.: ±0.35	x.x': ±3.0°	TITLE : 2.0mm Pitch R/A Type Wafer	
2X	ORIGINAL	Judyyan		x.xx: ±0.25	x.xxx': ±2.0°	DATE: 29-Jun-2019	
1X	DESCRIPTION	DR.BY	ECN. NO.	x.xxx: ±0.15	x.xxxx': ±1.0°		

HJBRIGHT® 東莞市華晶電子有限公司
BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 1/1
SCALE: 1:1
UNIT: mm



THIRD ANGLE PROJECTION

A4