

Specifications:

Material And Finish:

Insulator:PA6T UL94V-0 Color:Natural

Contact:Brass

Plated:See Ordering Information

Rating:

Current Rating:2.0 Amp

Voltage Rating:100V AC/DC

Operating Temperature Range:-40°~+105°C

Electrical:

Contact resistance:20m Ohm Max

Insulator resistance:1000M ohm min.

Withstanding Voltage:800V AC/Minute

Ordering Information

A2001M-XXX-01-F

1 2 3 4 5

1: — Series No.






2: — M:SMT Type

3: — No. of Positions

4: — A:Gold Flash

Q:Tin Plated

5: — F:W/Cap In Tape&Reel

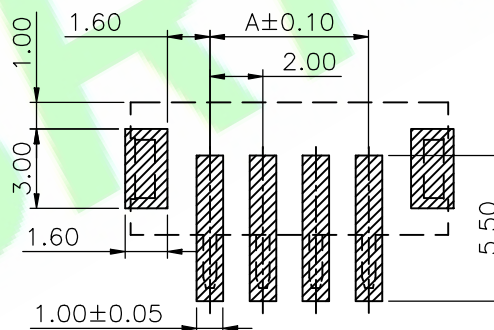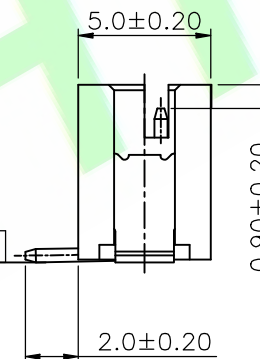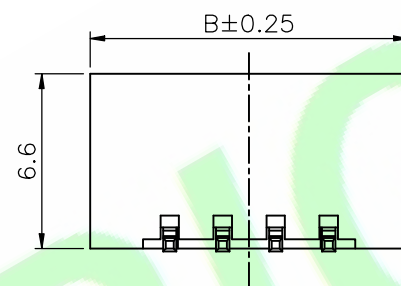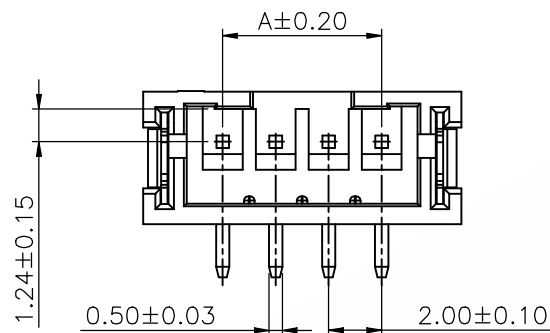

PCB LAYOUT

PART NO	Dimensions	
	A	B
02		8.00
03	4.00	10.00
04	6.00	12.00
05	8.00	14.00
06	10.00	16.00
07	12.00	18.00
08	14.00	20.00
09	16.00	22.00
10	18.00	24.00
11	20.00	26.00
12	22.00	28.00
13	24.00	30.00
14	26.00	32.00
15	28.00	34.00
16	30.00	36.00

5X				DR.BY.: Samson	GENERAL TOLERANCE:		PART NO : A2001M-XXX-01-F		HJBRIGHT® 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED			
4X					LINEAR	ANGLES	DWG. NO.:					
3X				CHKD.: Tony	x.: ±0.30	x': REF±6°	TITLE : 2.0mm Pitch Wafer SMT Type		SHEET: 1/1			A4
2X	Code options update	Judyyan	20220722		x.x: ±0.25	x.x': ±3.0°			SCALE: 1:1			
1X	ORIGINAL	Samson		APPD.: Billy	x.xx: ±0.15	x.xx': ±2.0°	DATE: 02-Nov-2017		UNIT: mm			
REV.	DESCRIPTION	DR.BY	ECN. NO.		x.xxx: ±0.10	x.xxx':						