


Specifications:
Material And Finish:
Insulator:Nylon66 UL94V-0 Color:Natural
Contact:Copper Alloy
Plated:See Ordering Information

Rating:
Current Rating:2.0 Amp
Voltage Rating:100V AC/DC
Operating Temperature Range:-40°~+105°C


Electrical:
Contact resistance:10m Ohm Max
Insulator resistance:1000M ohm min.
Withstanding Voltage:800V AC/Minute

Ordering Information
A2001SA-XXX-01-NA
1 2 3 4 5 6

- 1: — Series No.
2: — S: Straight Type
3: — No. of Positions
4: — A: Gold Flash
H: Selective Gold Plated
Q: Tin Plated
5: — N: Natural
6: — A: In Bag

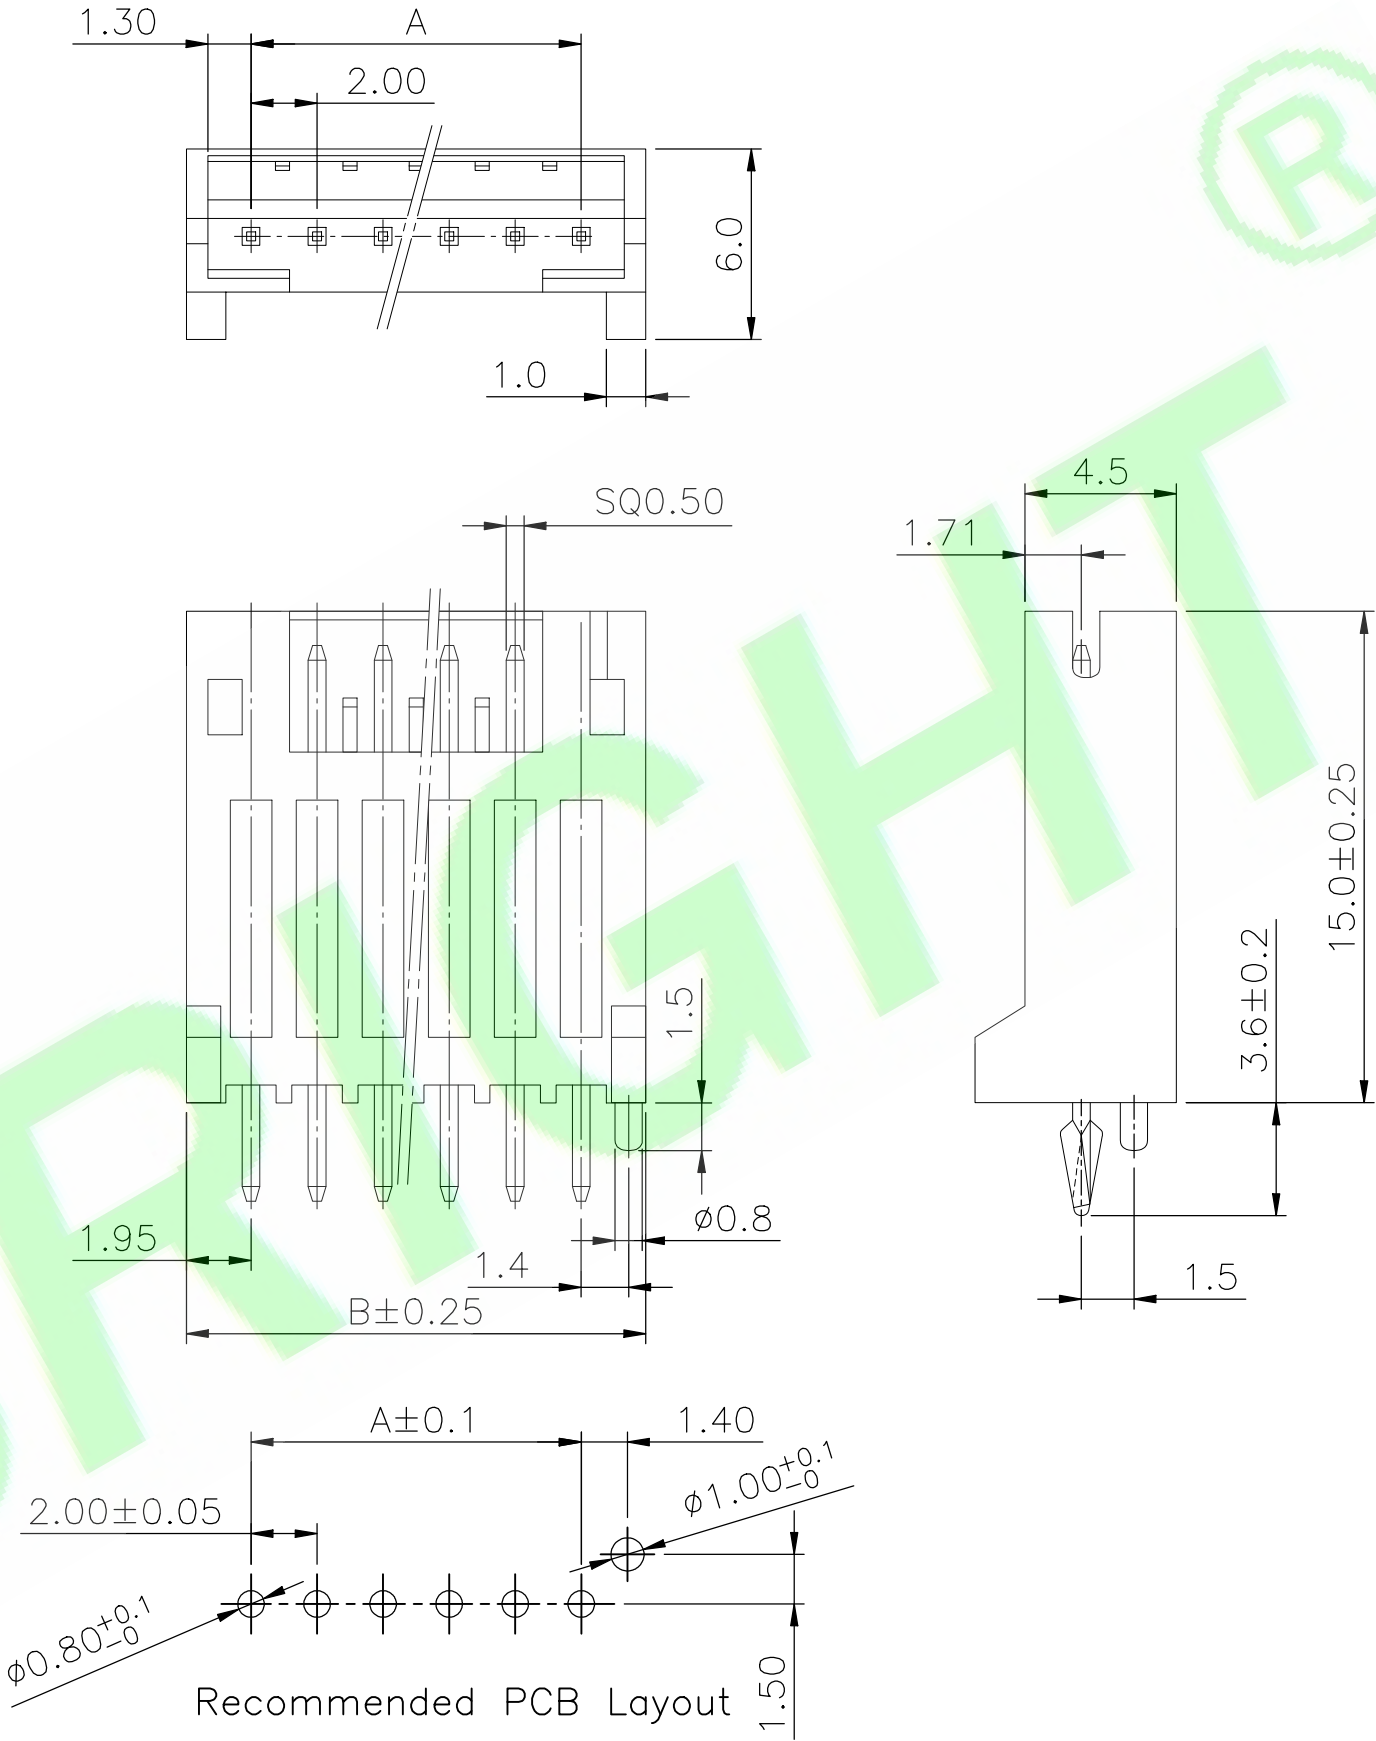

No.of	Dimensions	
	A	B
02	2.0	5.9
03	4.0	7.9
04	6.0	9.9
05	8.0	11.9
06	10.0	13.9
07	12.0	15.9
08	14.0	17.9
09	16.0	19.9
10	18.0	21.9
11	20.0	23.9
12	22.0	25.9
13	24.0	27.9

DR.BY.: Judyyan	GENERAL TOLERANCE:		PART NO : A2001SA-XXX-01-NA	HJBRIGHT® 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED		
	LINEAR	ANGLES	DWG. NO.:			
CHKD.: Tony	x.: ±0.30	x': ±5.0°	TITLE : 2.0mm Pitch Wafer Straight Type	SHEET: 1/1		A4
	x.x: ±0.20	x.x': ±3.0°		SCALE: 1:1		
APPD.: Billy	x.xx: ±0.15	x.xx': ±2.0°		DATE: 26-Nov-2024		
	x.xxx: ±0.10	x.xxx': ±1.0°				

1X	ORIGINAL	Judyyan	ECN. NO.
REV.	DESCRIPTION	DR.BY	