








Specifications:
Material And Finish:
Insulator:Nylon 66/PBT UL94V-0 .
Color:Natural.
Contact:Brass.
Plated:See Ordering Information.

Rating:
Current Rating:3.0 Amp(22AWG).
Voltage Rating:250V AC/DC.
Operating Temperature Range:-40~+105°C.

Electrical:
Contact resistance:10m Ohm Max.
Insulator resistance:1000M ohm min.
Withstanding Voltage:800V AC/Minute.

Ordering Information
A2005R-XXX-03-XXX
1 2 3 4 5 6 7

- 1:—Series No.
2:—R:R/A Type
3:—No. of Positions
4:—A:Gold Flash
H:Selective Gold Plated
Q:Tin Plated
5:—L:PA66
P:PBT
6:—A:In bag
B:In Tube
C:In Tray
7:—Blank: W/O Peg
1: W/1 Peg

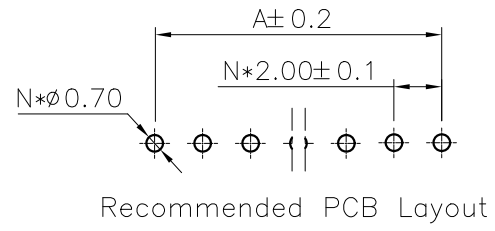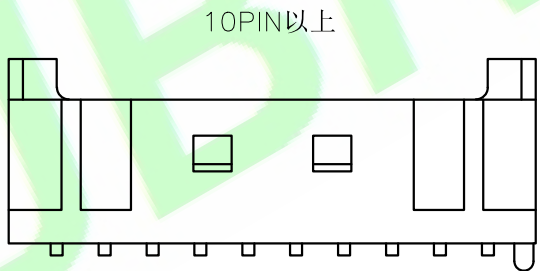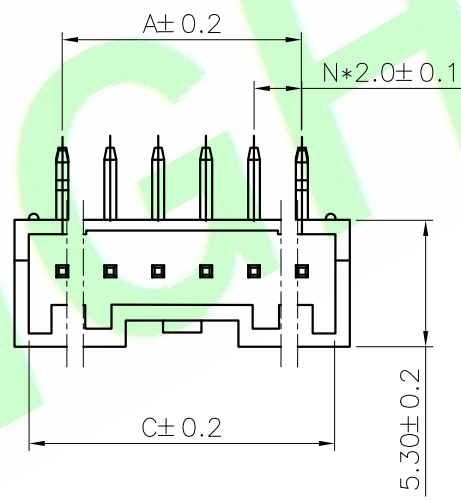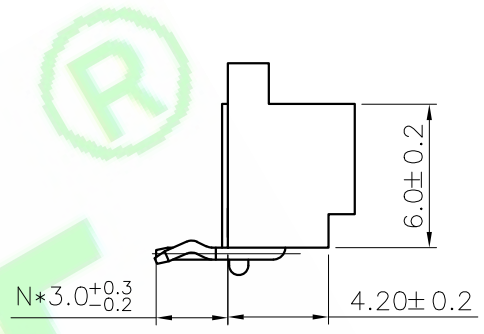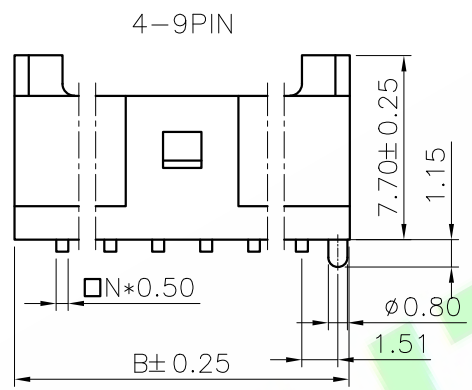

P/N	Dimension mm		
	A	B	C
2	2.00	6.00	4.80
3	4.00	8.00	6.80
4	6.00	10.00	8.80
5	8.00	12.00	10.80
6	10.00	14.00	12.80
7	12.00	16.00	14.80
8	14.00	18.00	16.80
9	16.00	20.00	18.80
10	18.00	22.00	20.80
11	20.00	24.00	22.80
12	22.00	26.00	24.80
13	24.00	28.00	26.80
14	26.00	30.00	28.80
15	28.00	32.00	30.80
16	30.00	34.00	32.80

				DR.BY.: Samson		GENERAL TOLERANCE:		PART NO : A2005R-XXX-03-XXX		HJBRIGHT® 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED							
4X Add Code Option		JoinZm		20250620		LINEAR		ANGLES						DWG. NO.:			
3X Update PCB aperture		Judyyan		20240802		x.: ±0.30		x°: ±5.0°						TITLE :			
2X Houing The material change		Judyyan		20220628		x.x: ±0.20		x.x°: ±3.0°		2.0mm Pitch Wafer R/A Type		SHEET: 1/1				A4	
1X ORIGINAL		Samson				x.xx: ±0.15		x.xx°: ±2.0°				SCALE: 1:1					
REV. DESCRIPTION		DR.BY		ECN. NO.		x.xxx: ±0.10		x.xxx°: ±1.0°		DATE: 14-Jun-2012		UNIT: mm					
1		2		3		4		5		6		7		8			