


Specifications:  
 Material And Finish:  
 Insulator:PA6T,UL94V-0,Color:Natural  
 Contact:Brass  
 Plated:See Ordering Information

Rating:  
 Current Rating:3.0 Amp  
 Voltage Rating:250V AC/DC  
 Operating Temperature Range:-40~+125°C

Electrical:  
 Contact resistance:10m Ohm Max  
 Insulator resistance:1000M ohm min.  
 Withstanding Voltage:800V AC/Minute

Ordering Information  
 A2005SA-XXX-01-NX

- 1: Series No.
- 2: SA:Deep type
- 3: No. of Positions
- 4: Q: Tin Plated  
S: Matte Tin Plated
- 5: M: W/Mylar In Tape&Reel  
F: W/Cap In Tape&Reel  
G: W/Cap In Tape&Reel  
D: W/O Cap In Tape&Reel

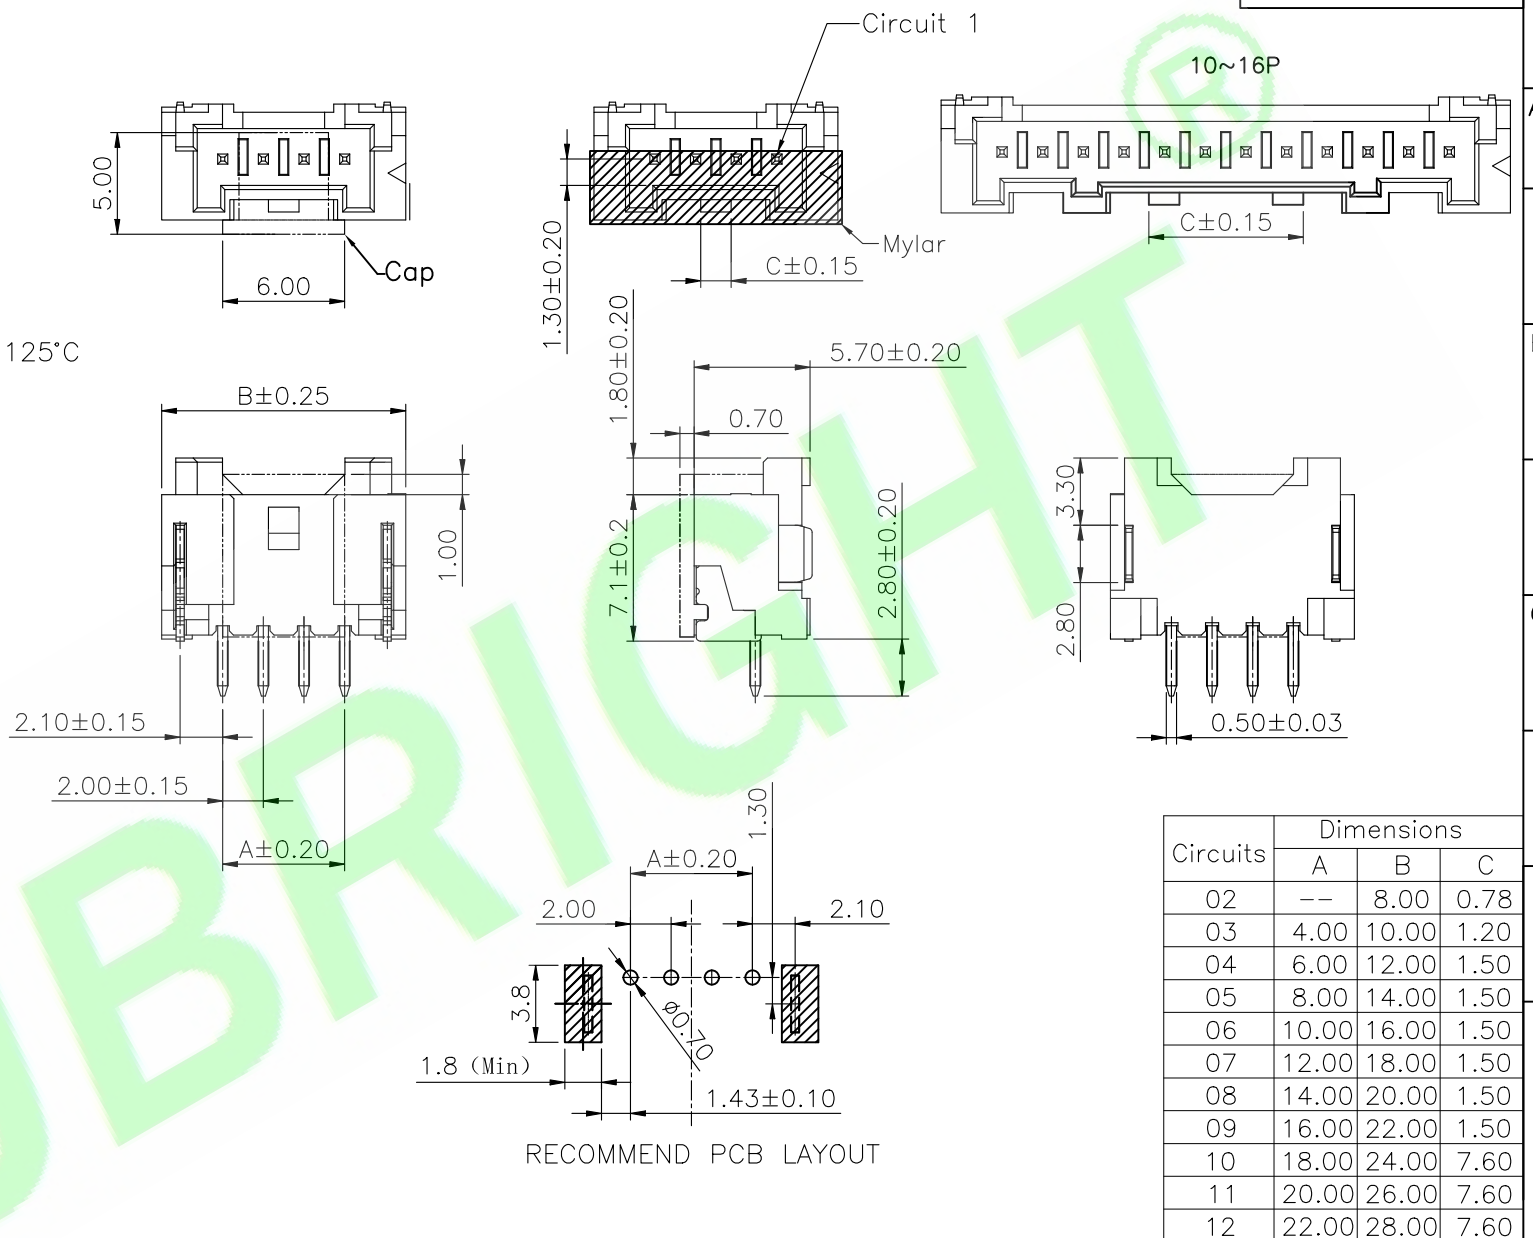

2X	Add new options	Zolin	20241129
1X	ORIGINAL	Zolin	
REV.	DESCRIPTION	DR.BY	ECN. NO.

DR.BY: Zolin	GENERAL TOLERANCE:		PART NO : A2005SA-XXX-01-NX
CHKD.: Ren	LINEAR	ANGLES	DWG. NO.:
APPD.: Billy	X.: ±	X': ±6.0°	TITLE :
	X.X: ±0.25	X.X': ±2.0°	2.0mm Pitch Wafer Deep Type
	X.XX: ±0.15	X.XX': ±	DATE: 09-Jul-2024
	X.XXX: ±0.08	X.XXX': ±	

**HJBRIGHT** 東莞市華晶電子有限公司  
 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 1/1  
 SCALE: 1:1  
 UNIT: mm

THIRD ANGLE PROJECTION

**A4**