

Specifications:**Material And Finish:**

Insulator:High temperature themoplastic

Contact:Brass

Plated:See Ordering Information

Rating:

Current—Maximum per contact:4.0 Amp (22AWG)

Operating Temperature Range:-40~+125°C

Electrical:

Contact resistance:20m Ohm Max

Insulator resistance:100M ohm min.

Withstanding Voltage:1000V AC/Minute

Ordering InformationA20062R-XXS-XC

1 2 3 4 5 6

1: — Series No.

2: — R:R/A Type

3: — No. of Positions

4: — S: Matte Tin Plated













5: — Polarization OPTION:


A: A TYPE Color:Balck










B: B TYPE Color:Gray

C: C TYPE Color:Drak Gray


6: — C:In Tray

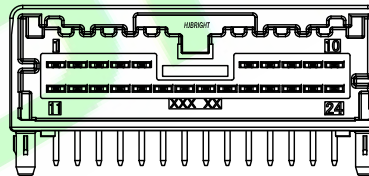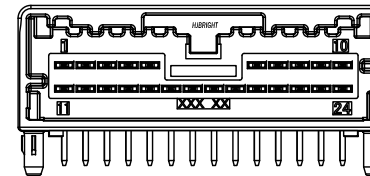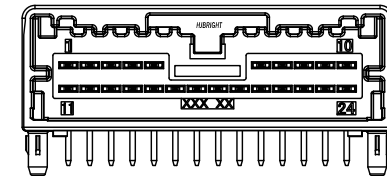12 CIRCUIT RIGHT ANGLE HEADER
POLARIZATION OPTION A TYPE COLOR:BLACK12 CIRCUIT RIGHT ANGLE HEADER
POLARIZATION OPTION B TYPE COLOR:GRAY12 CIRCUIT RIGHT ANGLE HEADER
POLARIZATION OPTION C TYPE COLOR:DARK GRAY16 CIRCUIT RIGHT ANGLE HEADER
POLARIZATION OPTION A TYPE COLOR:BLACK16 CIRCUIT RIGHT ANGLE HEADER
POLARIZATION OPTION B TYPE COLOR:GRAY16 CIRCUIT RIGHT ANGLE HEADER
POLARIZATION OPTION C TYPE COLOR:DARK GRAY20 CIRCUIT RIGHT ANGLE HEADER
POLARIZATION OPTION A TYPE COLOR:BLACK20 CIRCUIT RIGHT ANGLE HEADER
POLARIZATION OPTION B TYPE COLOR:GRAY20 CIRCUIT RIGHT ANGLE HEADER
POLARIZATION OPTION C TYPE COLOR:DARK GRAY24 CIRCUIT RIGHT ANGLE HEADER
POLARIZATION OPTION A TYPE COLOR:BLACK24 CIRCUIT RIGHT ANGLE HEADER
POLARIZATION OPTION B TYPE COLOR:GRAY24 CIRCUIT RIGHT ANGLE HEADER
POLARIZATION OPTION C TYPE COLOR:DARK GRAY


5X				DR.BY.: Aaron	GENERAL TOLERANCE:		PART NO : A20062R-XXS-XC		HJBRIGHT® 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED			
4X						LINEAR	ANGLES					
3X				CHKD.: Tony	x.: ±0.30	x': ±5.0°	DWG. NO.:		SHEET: 1/3			
2X						x.x: ±0.20	x.x': ±3.0°	TITLE : MINI 50R/A DUAL ROW RIGHT ANGLE ASSEMBLY SALES DRAWING				
1X	ORIGINAL	Aaron		APPD.: Billy	x.xx: ±0.10	x.xx': ±2.0°	DATE: 24-Jun-2019		SCALE: 1:1			A4
REV.	DESCRIPTION	DR.BY	ECN. NO.			x.xxx: ±0.05	x.xxx': ±1.0°			UNIT: mm		

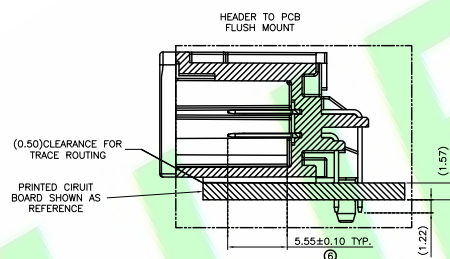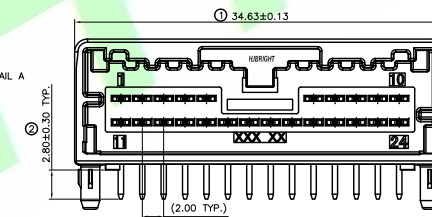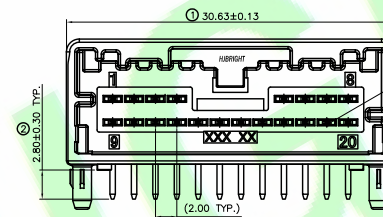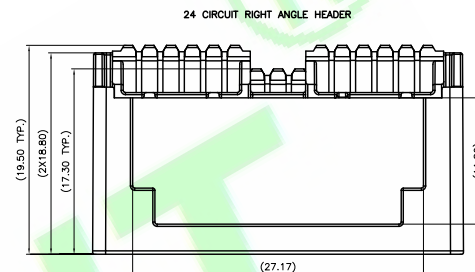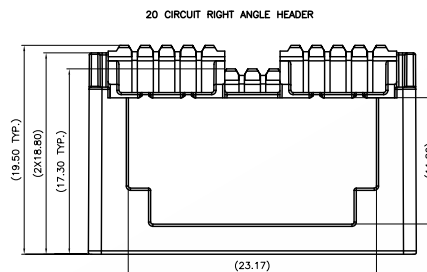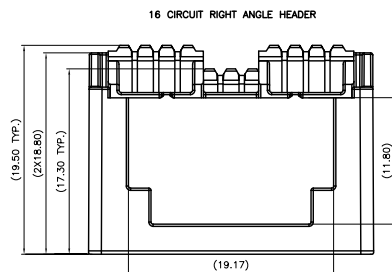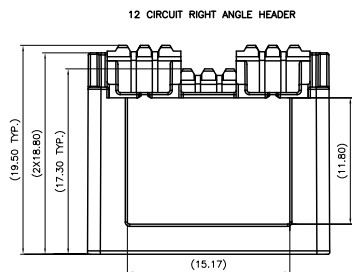

NOTE: SIDE VIEW IS SIMILAR FOR ALL CKTS ON THIS DRAWING



NOTE: SIDE VIEW IS SIMILAR FOR ALL CKTS ON THIS DRAWING



5X			
4X			
3X			
2X			
1X	ORIGINAL	Aaron	
REV.	DESCRIPTION	DR.BY	ECN. NO.

DR.BY.:
Aaron
CHKD.:
Tony
APPD.:
Billy

GENERAL TOLERANCE:	
LINEAR	ANGLES
X.: ±0.30	X': ±5.0°
X.X: ±0.20	X.X': ±3.0°
X.XX: ±0.10	X.XX': ±2.0°
X.XXX: ±0.05	X.XXX': ±1.0°





PART NO : A20062R-XXS-XC
DWG. NO.:
TITLE :
MINI 50R/A DUAL ROW
RIGHT ANGLE ASSEMBLY SALES DRAWING
DATE: 24-Jun-2019

HJBRIGHT® 東莞市華晶電子有限公司
BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 2/3
SCALE: 1:1
UNIT: mm

THIRD ANGLE PROJECTION

A4

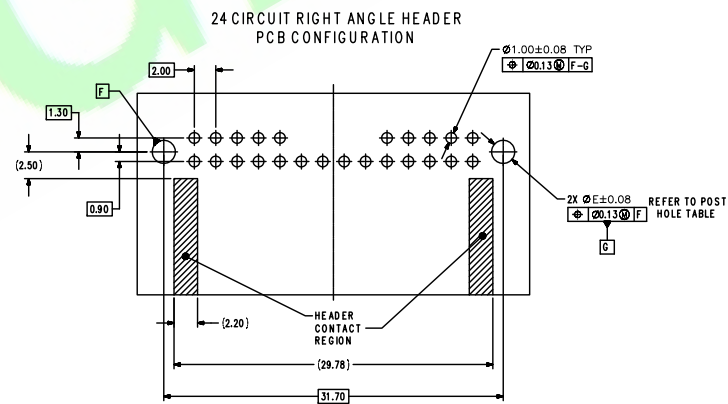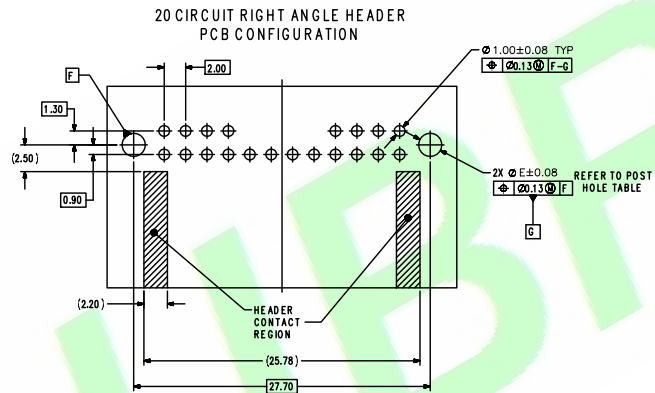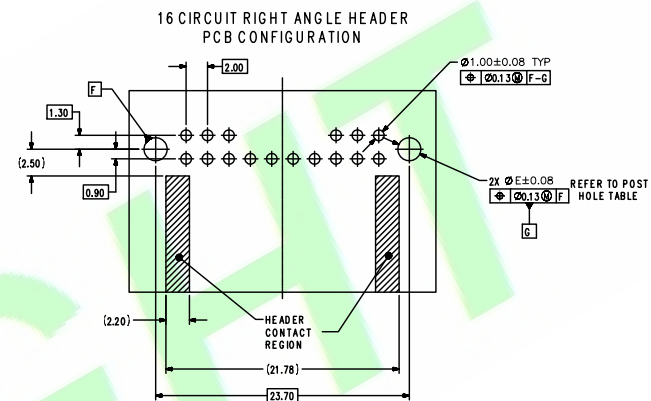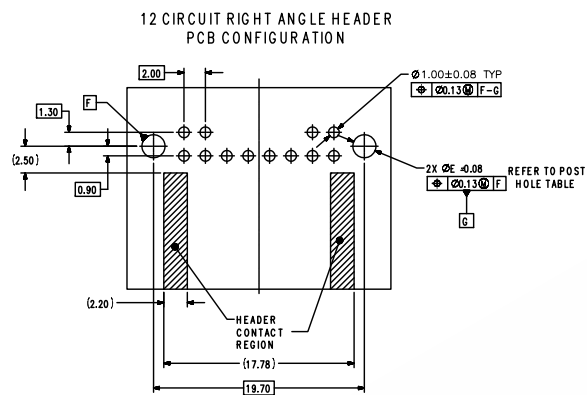

POST HOLE TABLE

	DIM E'
PRESS FIT	2.15
DROP IN	2.55

5X				DR.BY.: Aaron	GENERAL TOLERANCE:		PART NO : A20062R-XXS-XC		HJBRIGHT® 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED		
4X						LINEAR	ANGLES	DWG. NO.:			
3X				CHKD.: Tony	x.: ±0.30	x*: ±5.0°	TITLE : MINI 50R/A DUAL ROW RIGHT ANGLE ASSEMBLY SALES DRAWING		SHEET: 3/3		A4
2X					x.x: ±0.20	x.x*: ±3.0°			SCALE: 1:1		
1X	ORIGINAL	Aaron		APPD.: Billy	x.xx: ±0.10	x.xx*: ±2.0°	DATE: 24-Jun-2019		UNIT: mm		
REV.	DESCRIPTION	DR.BY	ECN. NO.			x.xxx: ±0.05	x.xxx*: ±1.0°				