

Specifications:

Material And Finish:

Insulator:LCP UL94V-0 Color:Natural

Contact:Copper Alloy

Plated:See Ordering Information

Rating:

Current Rating:2.0 Amp

Voltage Rating:250V AC/DC

Operating Temperature Range:-25~+105°C

Electrical:

Contact resistance:20m Ohm Max

Insulator resistance:1000M ohm min.








Withstanding Voltage:1000V AC/Minute

Ordering Information

A2007M-XXX-01-NX

1 2 3 4 5 6

- 1:—Series No.
2:—M:SMT Type
3:—No. of Positions
4:—A:Gold flash
S:Matte Tin Plated
Q:Tin Plated
5:—N:Natural
6:—B:In Tube
D:In Tape&Reel

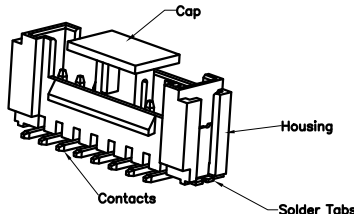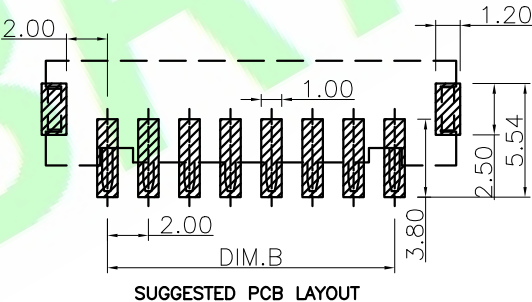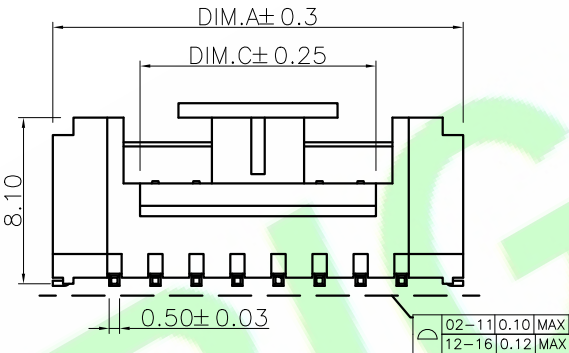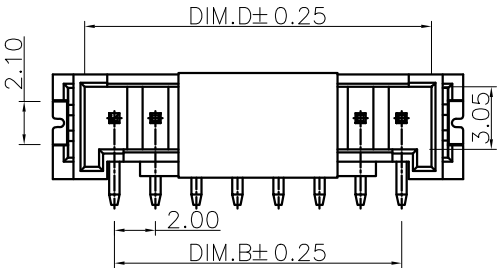


circuits	Dimensions(mm)			
	DIM.A	DIM.B	DIM.C	DIM.D
02	8.00	2.00	2.70	4.90
03	10.00	4.00	2.70	6.90
04	12.00	6.00	3.50	8.90
05	14.00	8.00	5.50	10.90
06	16.00	10.00	7.50	12.90
07	18.00	12.00	9.50	14.90
08	20.00	14.00	11.50	16.90
09	22.00	16.00	13.50	18.90
10	24.00	18.00	15.50	20.90
11	26.00	20.00	15.50	22.90
12	28.00	22.00	15.50	24.90
13	30.00	24.00	15.50	26.90
14	32.00	26.00	15.50	28.90
15	34.00	28.00	15.50	30.90
16	36.00	30.00	15.50	32.90

DR.BY.: Annie	GENERAL TOLERANCE:		PART NO : A2007M-XXX-01-NX	
	LINEAR	ANGLES	DWG. NO.:	
CHKD.: Judyyan	x.: ±0.50	x': ±5.0°	TITLE :	
	x.x: ±0.30	x.x': ±2.0°	2.0mm Pitch Wafer SMT Type	
APPD.: Billy	x.xx: ±0.20	x.xx': ±1.0°	DATE: 25-Nov-2024	
	x.xxx: ±0.10	x.xxx':		

HJBRIGHT® 东莞市華晶電子有限公司
BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 1/1
SCALE: 1:1
UNIT: mm



THIRD ANGLE PROJECTION

A4

1X	ORIGINAL	Annie	
REV.	DESCRIPTION	DR.BY	ECN. NO