

Specifications:

Material And Finish:

Insulator:Nylon66 UL94V-0 Color:Nature

Contact:Brass

Plated:See Ordering Information

Rating:

Current Rating:3.0 Amp(22AWG)

Voltage Rating:250V AC/DC

Operating Temperature Range:-40°~+105°C

Electrical:

Contact resistance:30m Ohm Max

Insulator resistance:1000M ohm min.


Withstanding Voltage:1000V AC/Minute

Ordering Information

A2007R-XXS-02-X

1 2 3 4 5

- 1: — Series No.
2: — R/R/A Type
3: — No. of Positions
4: — S:Matte Tin Plated
5: — A:In Bag
B:In Tube
C:In Tray
F:In Tape&Reel

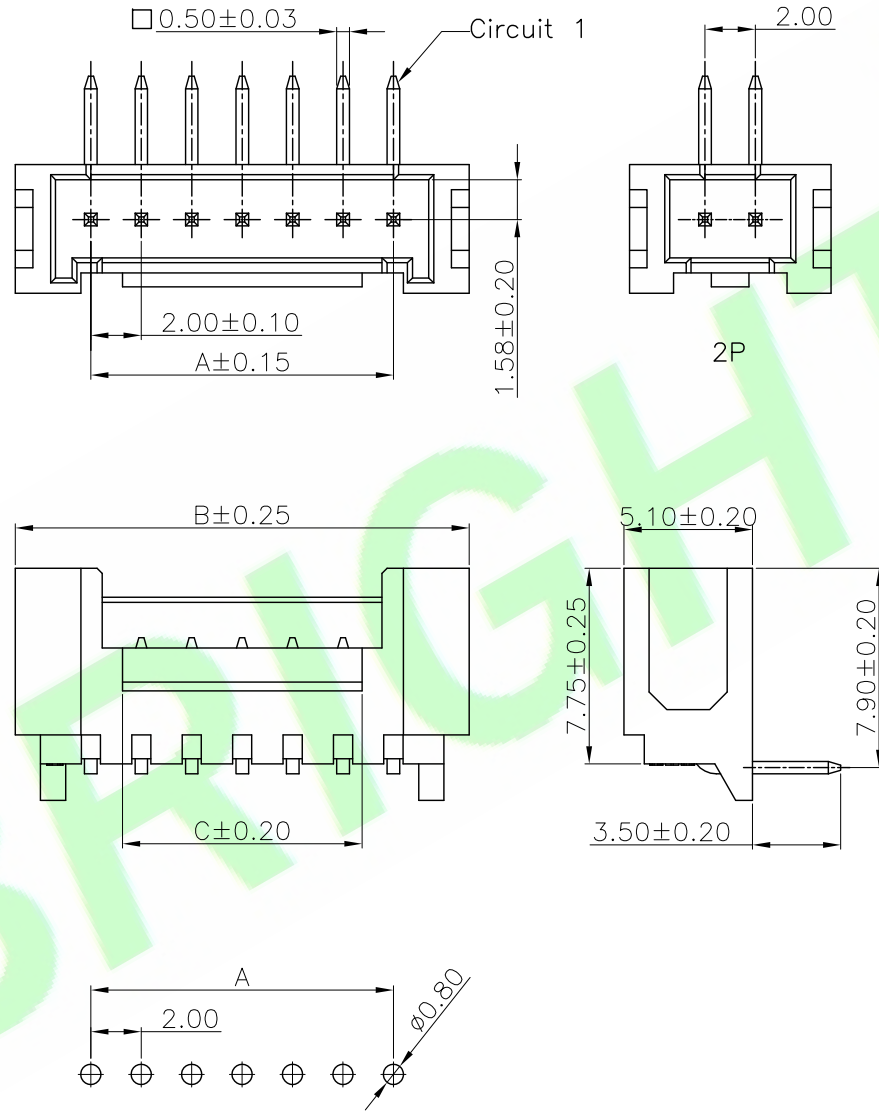

PCB LAYOUT

Circuits	Dimensions		
	A	B	C
02	--	8.00	1.50
03	4.00	10.00	
04	6.00	12.00	3.50
05	8.00	14.00	5.50
06	10.00	16.00	7.50
07	12.00	18.00	9.50
08	14.00	20.00	11.50
09	16.00	22.00	13.50
10	18.00	24.00	15.50
11	20.00	26.00	
12	22.00	28.00	
13	24.00	30.00	
14	26.00	32.00	
15	28.00	34.00	
16	30.00	36.00	

5X			
4X			
3X	Update the material	Judyyan	20221202
2X	Update code options	Judyyan	20220805
1X	ORIGINAL	Bruce	
REV.	DESCRIPTION	DR.BY	ECN. NO.

DR.BY.: Bruce
CHKD.: Tony
APPD.: Billy

GENERAL TOLERANCE:	
LINEAR	ANGLES
X.: ±0.30	X': REF 6°
X.X: ±0.25	X.X': ±2°
X.XX: ±0.15	X.XX': ±
X.XXX: ±0.10	X.XXX': ±

PART NO : A2007R-XXS-02-X

DWG. NO.:

TITLE :

2.0mm Pitch Wafer R/A Type


DATE: 04-Jun-2017

HJBRIGHT® 東莞市華晶電子有限公司
BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 1/1

SCALE: 1:1

UNIT: mm



THIRD ANGLE PROJECTION

A4