

Specifications:**Material And Finish:**

Insulator:Nylon 66 UL94V-0 Color:Natural

Contact:Barss

Plated:See Ordering Information

Rating:

Current Rating:3.0 Amp (24AWG)

Voltage Rating:125V AC/DC

Operating Temperature Range:-40°~+105°C

Electrical:

Contact resistance:20m Ohm Max






Insulator resistance:1000M ohm min.

Withstanding Voltage:500V AC/Minute

Ordering Information**A2013R-XXX-01-XA**

1 2 3 4 56

- 1: — Series No.
2: — R:R/A Type
3: — No. of Positions
4: — A:Gold Flash
Q: Tin Plated
S: Matte Tin Plated
5: — N: Natural
B: Black
6: — A: In Bag

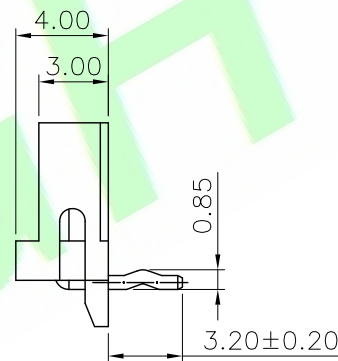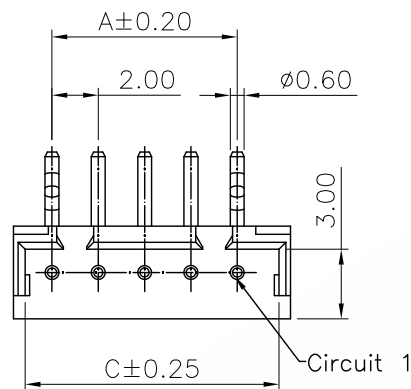

Recommended P.C.B Layout

Poles	Dimensions (mm)		
	A	B	C
02P	/	5.96	4.96
03P	4.00	7.96	6.96
04P	6.00	9.40	8.96
5P	8.00	10.83	10.96
6P	10.00	12.27	12.96
7P	12.00	13.70	14.96
8P	14.00	15.14	16.96
9P	16.00	16.58	18.96
10P	18.00	18.01	20.96
11P	20.00	19.45	22.96
12P	22.00	20.88	24.96
13P	24.00	22.32	26.96
14P	26.00	23.76	28.96
15P	28.00	25.19	30.96

5X			
4X			
3X			
2X	Update code options	Judyyan	20220927
1X	ORIGINAL	Sophia	
REV.	DESCRIPTION	DR.BY	ECN. NO.

DR.BY.: Sophia
CHKD.: Tony
APPD.: Billy

GENERAL TOLERANCE:	
LINEAR	ANGLES
X.: ±0.30	X': ±5.0°
X.X: ±0.20	X.X': ±3.0°
X.XX: ±0.15	X.XX': ±2.0°
X.XXX: ±0.10	X.XXX': ±1.0°

PART NO : A2013R-XXX-01-XA
DWG. NO.:
TITLE : 2.0mm Pitch Wafer R/A Type
DATE: 02-Jul-2020

HJBRIGHT® 东莞市華晶電子有限公司
BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 1/1
SCALE: 1:1
UNIT: mm



THIRD ANGLE PROJECTION

A4