

Specifications:

Material And Finish:

Insulator:PA9T UL94V-0

Contact:Brass

Rating:

Current Rating:4.0 Amp(2P/22AWG)

Voltage Rating:250V AC/DC


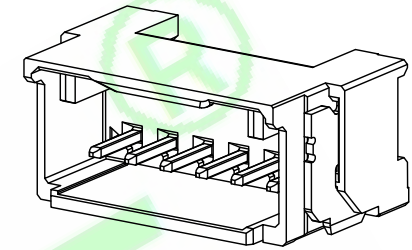
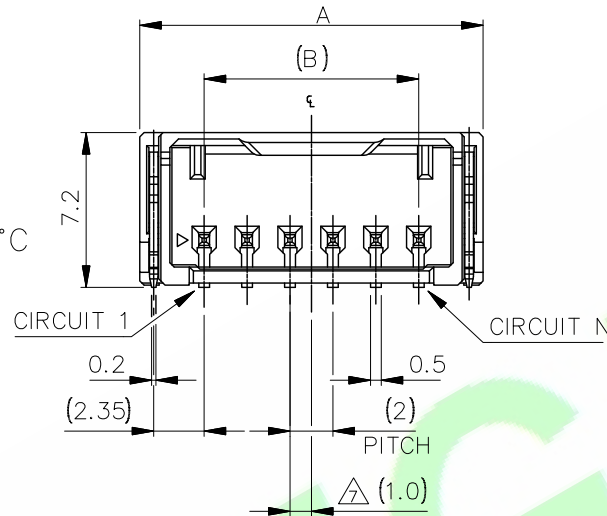


Operating Temperature Range:-40°~+125°C

Electrical:

Contact resistance:20m Ohm Max

Insulator resistance:1000M ohm min.

Withstanding Voltage:1000V AC/Minute

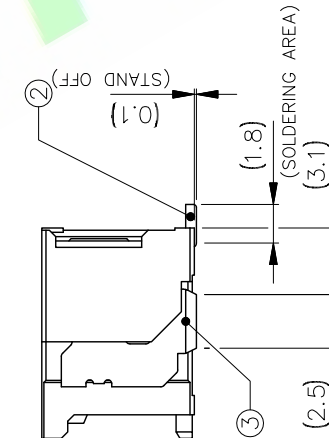
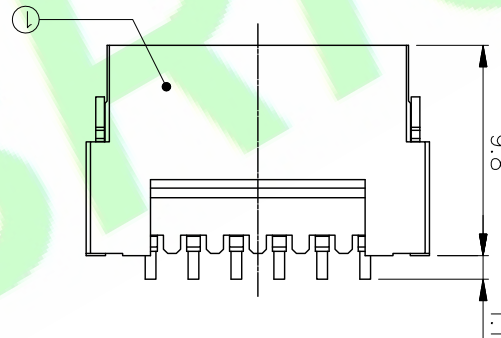
VIEW OF
2-3 CIRCUITVIEW OF
4-6 CIRCUITVIEW OF
7-8 CIRCUIT

Ordering Information

A2014H-XXX-02-XG

1 2 3 4 5 6

- 1: — Series No.
2: — H:Housing
3: — No.of Positipns
4: — A:Gold Flash
S:Matte Tin Plated
5: — N: Natural
B: Black
6: — W/O Cap In Tape&Reel



CIRCUIT SIZE	B	A
8	14	20
7	12	18
6	10	16
5	8	14
4	6	12
3	4	10
2	2	8

5X				DR.BY.: Deng	GENERAL TOLERANCE:		PART NO : A2014H-XXX-02-XG	HJBRIGHT® 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED		
4X						LINEAR	ANGLES			
3X				CHKD.: Aren	X.:	X': ±5.0°	TITLE : 2.00mm Housing	SHEET: 1/1		A4
2X					X.X: ±0.30	X.X': ±3.0°		SCALE: 1:1		
1X	ORIGINAL	Deng		APPD.:	X.XX: ±0.20	X.XX': ±2.0°		UNIT: mm		
REV.	DESCRIPTION	DR.BY	ECN. NO.	Billy	X.XXX: ±0.10	X.XXX': ±1.0°	DATE: 15-May-2023			