

Specifications:**Material And Finish:**

Insulator:PA9T UL94V-0 Color:Natural

Contact:Brass

Rating:

Current Rating:4.0 Amp (2P/22AWG)

Voltage Rating:250V AC/DC

Operating Temperature Range:-40°~+125°C

Electrical:

Contact resistance:20m Ohm Max

Insulator resistance:1000M ohm min.

Withstanding Voltage:1000V AC/Minute








Ordering Information**A2014M-XXS-01-XX**

1 2 3 4 5 6

- 1:—Series No.
 2:—M:SMT Type
 3:—No. of Positions
 4:—S:Matte Tin Plating
 5:—N:Natural
 B:Black
 6:—D:In Tape&Reel
 M:In Mylar&Reel

Part No.	Dimension mm						
	A	B	C	D	E	F	G
02P	8.00	2.00	5.00	9.20	1.60	4.50	4.50
03P	10.00	4.00	7.00	11.20	3.60	6.50	6.00
04P	12.00	6.00	9.00	13.20	5.60	8.50	
05P	14.00	8.00	11.00	15.20	7.60	10.50	8.00
06P	16.00	10.00	13.00	17.20	9.60	12.50	
07P	18.00	12.00	15.00	19.20	11.60	14.50	
08P	20.00	14.00	17.00	21.20	13.60	16.50	

5X							
4X							
3X							
2X							
1X	ORIGINAL		Judyyan				
REV.	DESCRIPTION		DR.BY	ECN. NO.			

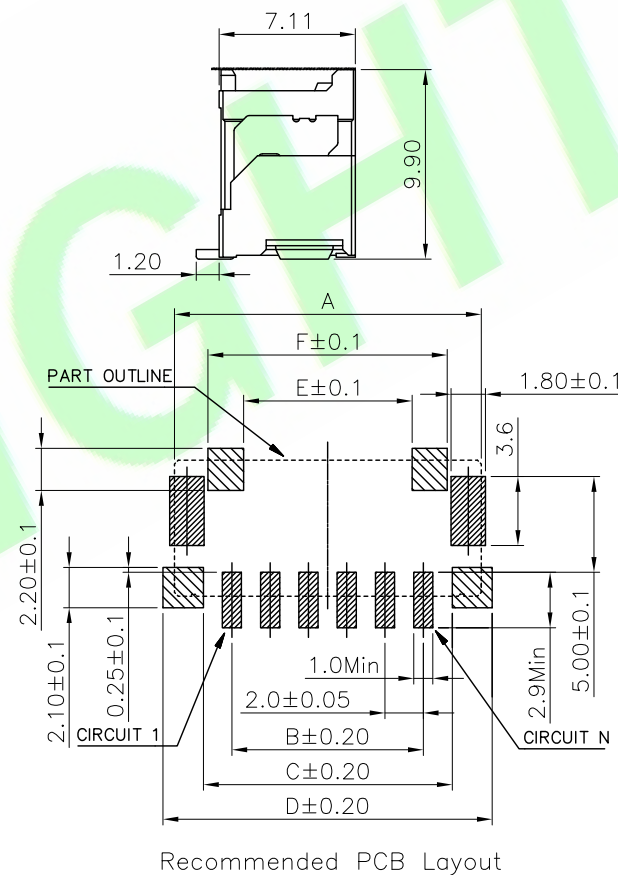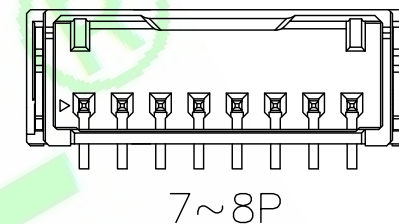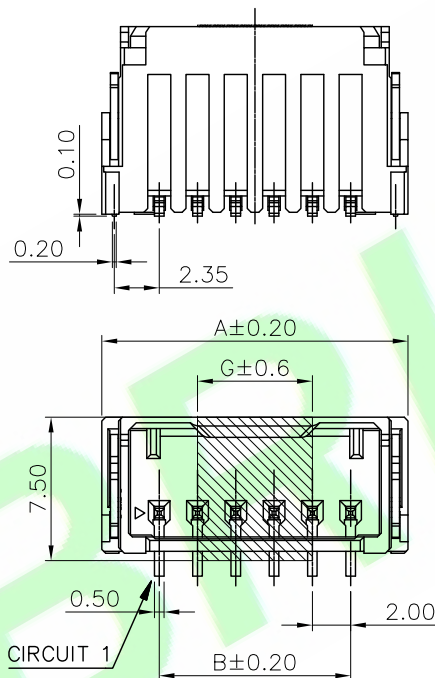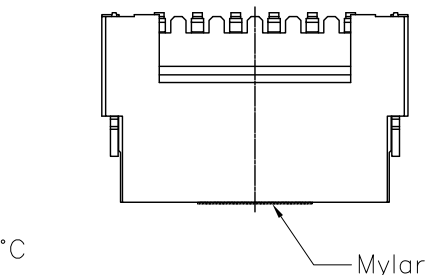

DR.BY:
Judyyan
 CHKD.:
Aren
 APPD.:
Billy

GENERAL TOLERANCE:	
LINEAR	ANGLES
X.: ±5.0°	X.X: ±3.0°
X.X: ±0.30	X.XX: ±2.0°
X.XX: ±0.20	X.XXX: ±1.0°
X.XXX: ±0.10	

PART NO : A2014M-XXS-01-XX

DWG. NO.:

TITLE :

2.00mm Pitch Wafer SMT Type


DATE: 12-Oct-2021

HJBRIGHT 東莞市華晶電子有限公司
 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 1/1

SCALE: 1:1

UNIT: mm



THIRD ANGLE PROJECTION

A4