

RoHS Compliant

Specifications:
Material And Finish:
Insulator:PA9T UL94V-0
Contact:Brass

Rating:
Current Rating:3.0 Amp
Voltage Rating:125V AC/DC
Operating Temperature Range:-40°~+125°C





Electrical:
Contact resistance:10m Ohm Max
Insulator resistance:1000M ohm min.
Withstanding Voltage:500V AC/Minute

Ordering Information

A2019M-XXS-01-XG

- 1: — Series No.
2: — M:SMT Type
3: — No. of Positions
4: — S:Matte Tin Plated
5: — Color:
N=Natural
B=Black
6: — G:In Tape&reel

0.15MAX

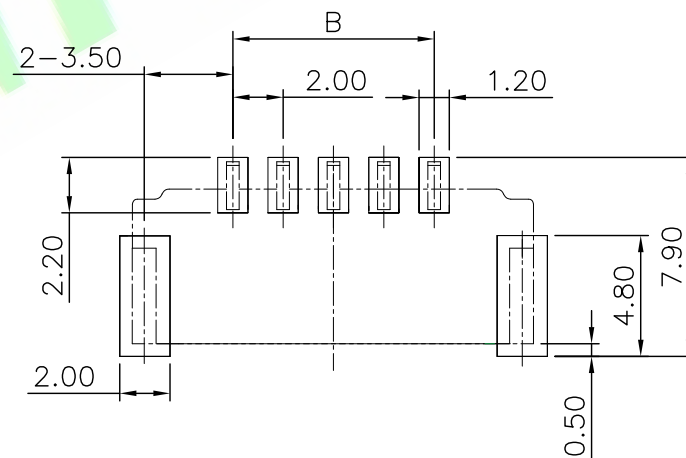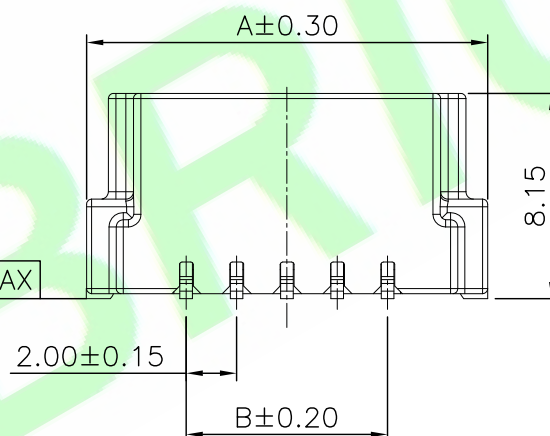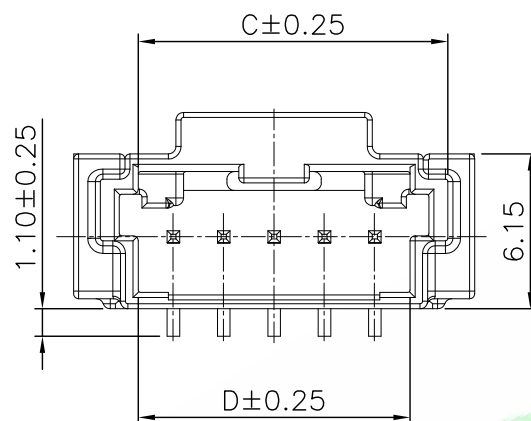

RECOMMENDED P.C.B LAYOUT

Circuits	A	B	C	D
2	9.90	2.00	6.30	4.80
3	11.90	4.00	8.30	6.80
4	13.90	6.00	10.30	8.80
5	15.90	8.00	12.30	10.80
6	17.90	10.00	14.30	12.80
7	19.90	12.00	16.30	14.80
8	21.90	14.00	18.30	16.80
9	23.90	16.00	20.30	18.80
10	25.90	18.00	22.30	20.80
11	27.90	20.00	24.30	22.80
12	29.90	22.00	26.30	24.80
13	31.90	24.00	28.30	26.80
14	33.90	26.00	30.30	28.80
15	35.90	28.00	32.30	30.80
16	37.90	30.00	34.30	32.80

5X			
4X			
3X			
2X			
1X	ORIGINAL	Judyyan	
REV.	DESCRIPTION	DR.BY	ECN. NO.


DR.BY.: Judyyan
CHKD.: Aren
APPD.: Billy

GENERAL TOLERANCE:	
LINEAR	ANGLES
X.: ±	X': ±5.0°
X.X: ±0.30	X.X': ±3.0°
X.XX: ±0.20	X.XX': ±2.0°
X.XXX: ±0.10	X.XXX': ±1.0°

PART NO : A2019M-XXS-01-XG
DWG. NO.:
TITLE : 2.0mm Pitch Wafer SMT Type
DATE: 20-Jul-2021

HJBRIGHT 東莞市華晶電子有限公司
BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 1/1
SCALE: 1:1
UNIT: mm



THIRD ANGLE PROJECTION

A4