

Specifications:

Material And Finish:

Insulator:PA4T UL94V-0 Color:Black

Contact:Brass

Shell:Brass/Tin Plated

Rating:

Current Rating:6.5 Amp

Voltage Rating:250V AC/DC

Operating Temperature Range:-40~+125°C

Electrical:

Contact resistance:20m Ohm Max

Insulator resistance:1000M ohm min.




Withstanding Voltage:800V AC/Minute

Ordering Information



A2022H-XXA-01-G

1 2 3 4 5


- 1: — Series No.
2: — H:Horizontal SMT Type
3: — No. of Positions
4: — A:Gold Flash
5: — G:In Tape&reel

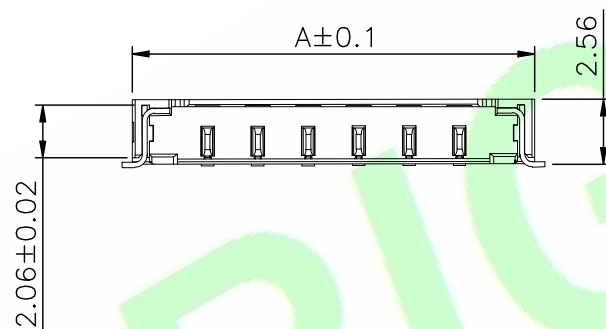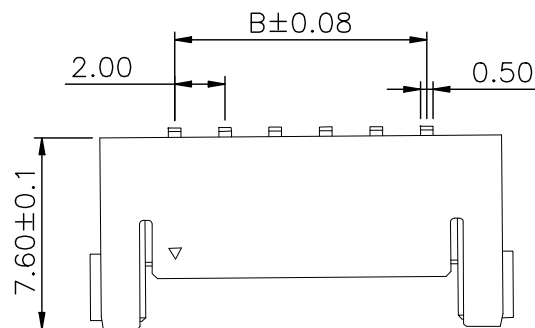

Circuits	A	B
02	7.65	2.00
03	9.95	4.00
04	11.95	6.00
05	13.95	8.00
06	15.95	10.00
07	17.95	12.00
08	19.95	14.00
09	21.95	16.00

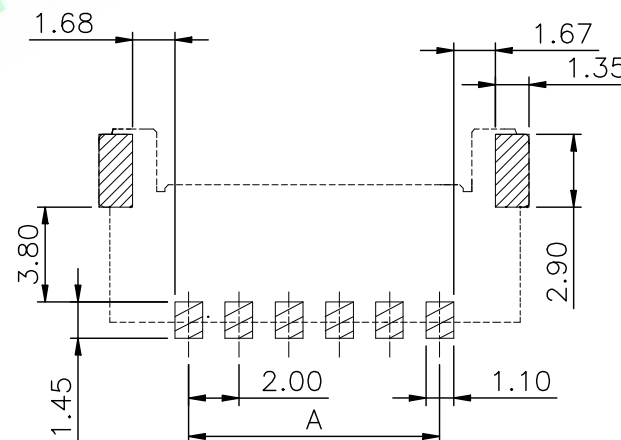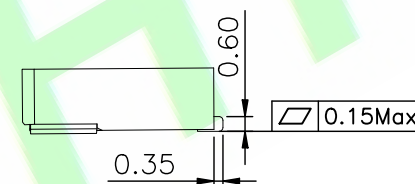

RECOMMENDED P.C.B LAYOUT

5X				DR.BY.: Judyyan	GENERAL TOLERANCE:	PART NO : A2022H-XXA-01-G	HJBRIGHT® 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED	
4X					LINEAR	DWG. NO.:		
3X				CHKD.: Aren	ANGLES	TITLE :	SHEET: 1/1	 THIRD ANGLE PROJECTION
2X					X.: ±	X.X: ±0.30	SCALE: 1:1	
1X	ORIGINAL	Judyyan		APPD.: Billy	X.XX: ±0.20	X.XX': ±2.0"	UNIT: mm	
REV.	DESCRIPTION	DR.BY	ECN. NO.		X.XXX: ±0.10	X.XXX': ±1.0"		A4
1						DATE: 20-Jul-2021		