


Specifications:
 Material And Finish:
 Insulator:Nylon 6T UL94V-0
 Contact:Brass
 Plated:See Ordering Information

Rating:
 Current Rating:2.0 Amp
 Voltage Rating:50V AC/DC
 Operating Temperature Range:-40°~+105°C


Electrical:
 Contact resistance:10m Ohm Max
 Insulator resistance:1000M ohm min.
 Withstanding Voltage:1100V AC/Minute

Ordering Information
 A2024H-XXQ-XX-G
 1 2 3 4 5 6




- 1: — Series No.
 2: — H:Horizontal SMT Type
 3: — No. of Positions
 4: — Q: Tin Plated
 5: — 01:A TYPE Natural
 02:B TYPE Black
 6: — G:W/O Cap In Tape&Reel




2P




3-10P

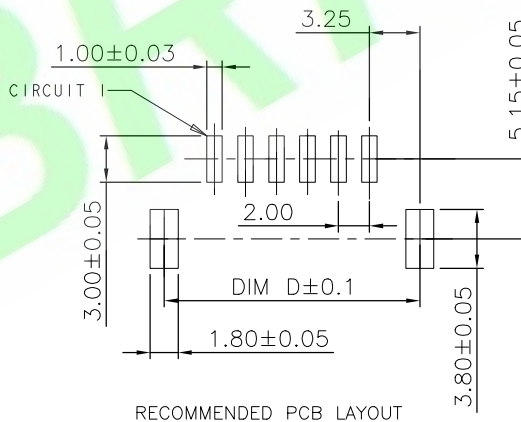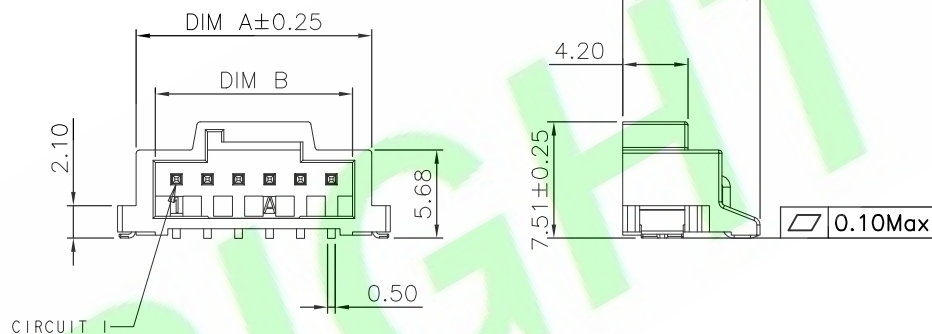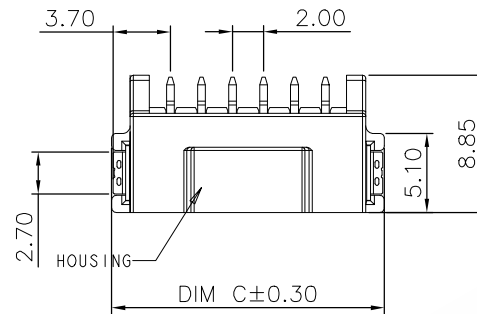

RECOMMENDED PCB LAYOUT



A Type Natural



B Type Black

10	23.2	20.72	25.60	24.50
9	21.2	18.72	23.60	22.50
8	19.2	16.72	21.60	20.50
7	17.2	14.72	19.60	18.50
6	15.2	12.72	17.60	16.50
5	13.2	10.72	15.60	14.50
4	11.2	8.72	13.60	12.50
3	9.2	6.72	11.60	10.50
2	7.2	4.72	9.60	8.50
POSITION	DIM.A	DIM.B	DIM.C	DIM.D

5X			
4X			
3X			
2X			
1X	ORIGINAL	Zolin	
REV.	DESCRIPTION	DR.BY	ECN. NO.


DR.BY.: Zolin	GENERAL TOLERANCE:		PART NO : A2024H-XXQ-XX-G
CHKD.: Tony	LINEAR	ANGLES	DWG. NO.:
APPD.: Billy	X.: ±0.30	X': ±5.0°	TITLE :
	X.X: ±0.20	X.X': ±3.0°	2.0mm Pitch Wafer Horizontal Type
	X.XX: ±0.15	X.XX': ±2.0°	DATE: 02-Feb-2023
	X.XXX: ±0.10	X.XXX': ±1.0°	

HJBRIGHT® 东莞市華晶電子有限公司
 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 1/1

SCALE: 1:1

UNIT: mm



THIRD ANGLE PROJECTION

A4