



Specifications:

Material And Finish:
Insulator:Nylon 9T UL94V-0
Color:See Ordering Information




Contact:High-conductivity copper
Plated:See Ordering Information

Rating:



Current Rating:5.0 Amp
Voltage Rating:100V AC/DC
Operating Temperature
Range:−40°~+125°C

Electrical:

Contact resistance:15m Ohm Max
Insulator resistance:100M ohm min.
Withstanding Voltage:1000V AC/Minute
Ordering Information
A2028H-08X-02-XG
1 2 3 4 5 6

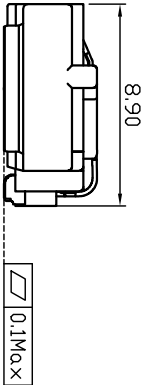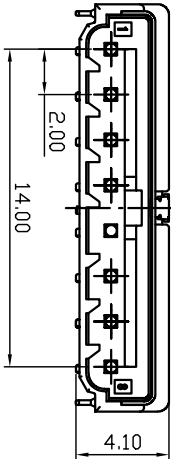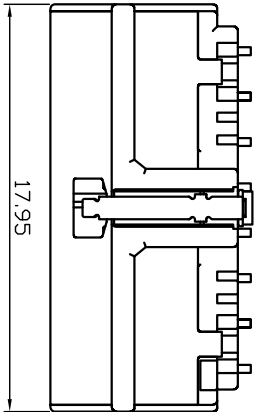

- 1:—Series No.
- 2:—H:Horizontal Type
- 3:—No. of Positions
- 4:—S:Matte Tin Plated
- H:Selective Gold Plated
- 5:—A:A Type Black
- B:B Type Nature
- C:C Type Blue
- D:D Type Red
- 6:—G:Tape&Reel

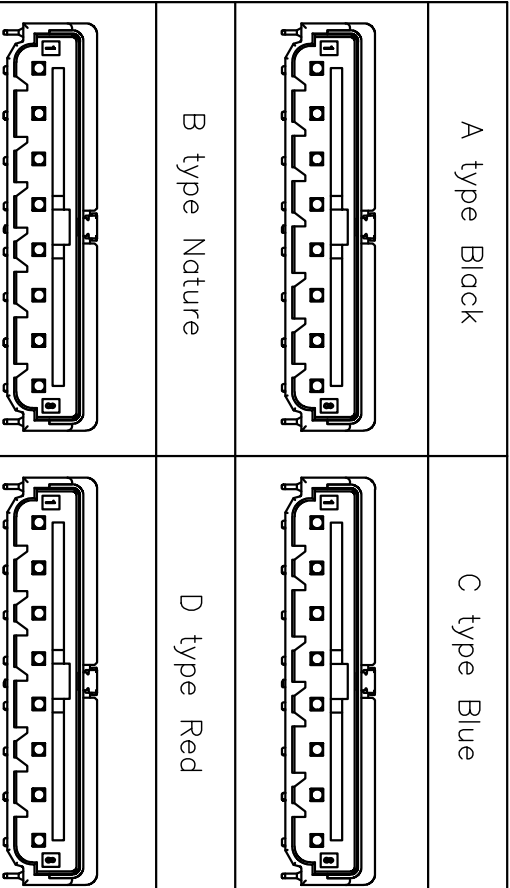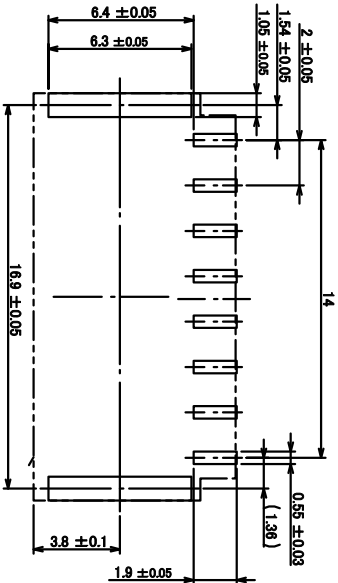

5X				DR.BY: Zolin	GENERAL TOLERANCE:		PART NO : A2028H-08X-02-XG		HJBRIGHT® 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED SHEET: 1/1 SCALE: 1:1 UNIT: mm  THIRD ANGLE PROJECTION A4		
4X					LINEAR	ANGLES	DWG. NO.:				
3X				CHKD: Hu.CH	X:	X: ±5.0°	TITLE : 2.0mm Pitch ULIH Series 8Pin Male Connector Electrical CPA Type				
2X					X.X: ±0.30	X.X: ±3.0°					
1X	ORIGINAL	Zolin		APPD:	X.XX: ±0.30	X.XX: ±2.0°					
REV	DESCRIPTION	DR.BY	ECN. NO.	Billy	X.XXX: ±0.15	X.XXX: ±1.0°	DATE: 04-Dec-2025				