



RoHS Compliant

Specifications:

Material And Finish:






Insulator: High-temperature material UL94V-0

Color:See Ordering Information

Contact: Copper alloys

Plated:See Ordering Information


Operating Temperature Range:-40~+105°C

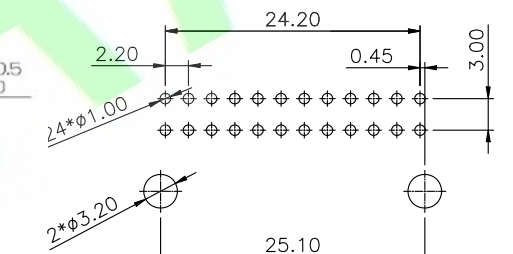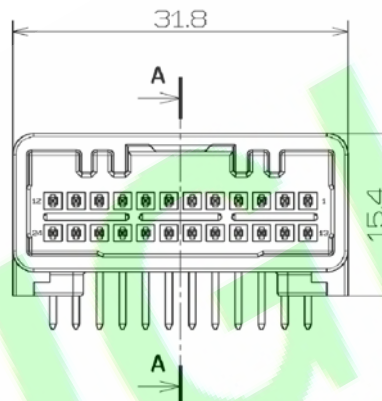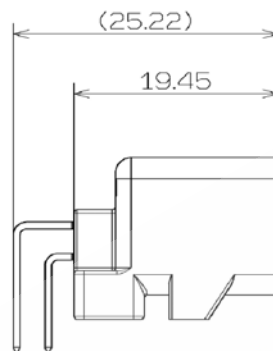



Recommended PCB LAYOUT (TOP VIEW)

Tolerance:±0.05mm


A Type Natural



B Type Black



FEMALE CONNECTOR

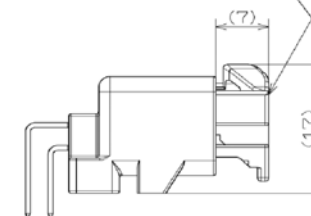

(REF)MATING CONDITION

Ordering Information

A22002R-24X-XX-X

1 2 3 4 5 6

- 1: Series No.
- 2: R:R/A Type
- 3: No. of Positions
- 4: S:Matte Tin Plated
Q:Tin Plated
- 5: A:A Type Natural
B:B Type Black
- 6: B:In Tube
A:In Tray

DR.BY.: Judyyan	GENERAL TOLERANCE:		PART NO : A22002R-24X-XX-X
CHKD.: Sam	LINEAR	ANGLES	DWG. NO.:
APPD.: Billy	10~50: ±0.50	X: ±5.0°	TITLE :
	<10: ±0.30	X.X: ±3.0°	2.20mm Pitch Wafer Connector 16P
		X.XX: ±2.0°	DATE: 27-Apr-2024
		X.XXX: ±1.0°	

HJBRIGHT® 东莞市華晶電子有限公司
BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 1/1
SCALE: 1:1
UNIT: mm



THIRD ANGLE PROJECTION

A4

1X	ORIGINAL	Judyyan	
REV.	DESCRIPTION	DR.BY	ECN. NO.