

Specifications:

Material And Finish:

Insulator:PBT UL94V-0 Color:Gray

Contact:Copper Alloy

Plated:See Ordering Information

Rating:

Current Rating:3.0 Amp

Voltage Rating:12V AC/DC

Operating Temperature Range:-40°C~+125°C

Electrical:

Contact resistance:10m Ohm Max





Insulator resistance:100M ohm min.

Withstanding Voltage:1000V AC/Minute

Ordering Information

A2200R-04Q-01-C
1 2 3 4 5

- 1: — Series No.
2: — R:R/A Type
3: — No. of Positions
4: — Q: Tin Plated
5: — C: In Tray

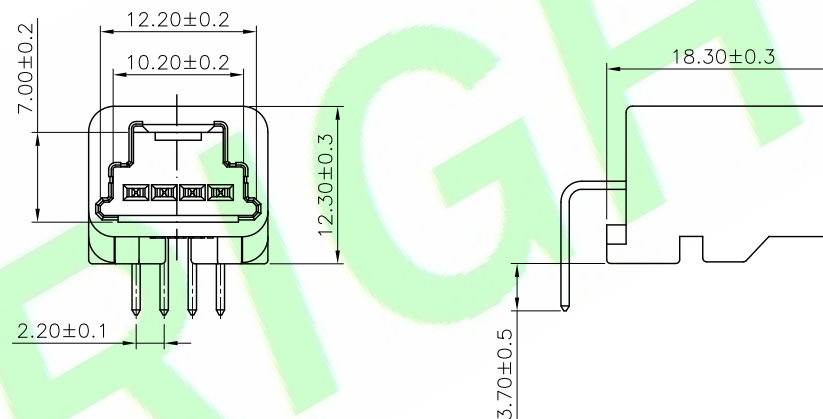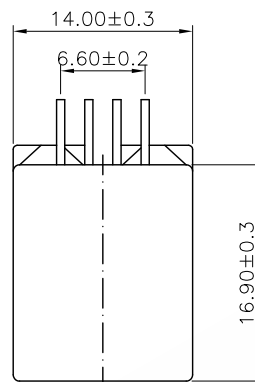

Recommended PCB Layout

5X				DR.BY.: Judyyan	GENERAL TOLERANCE:		PART NO : A2200R-04Q-01-C	HJBRIGHT® 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED		
4X					LINEAR	ANGLES	DWG. NO.:			
3X				CHKD.: Aren	x.: ±5.0°	x.x: ±0.30	TITLE : 2.2mm Pitch Wafer Series PCB Heaedr R/A Type	SHEET: 1/1		A4
2X					x.x: ±0.30	x.x: ±3.0°		SCALE: 1:1		
1X	ORIGINAL	Judyyan		APPD.: Billy	x.xx: ±0.20	x.xx: ±2.0°		UNIT: mm		
REV.	DESCRIPTION	DR.BY	ECN. NO.		x.xxx: ±0.10	x.xxx: ±1.0°	DATE: 15-Aug-2020			