





Specifications:
Material And Finish:
Insulator:PBT UL94V-0 Color:Natural
Contact:Brass
Plated:See Ordering Information

Rating:
Current Rating:3.0 Amp
Operating Temperature Range:-45°C~+125°C



Electrical:
Contact resistance:10m Ohm Max
Insulator resistance:1000M ohm min.
Withstanding Voltage:1000V AC/Minute

Ordering Information
A22011R-XXQ-01-X
1 2 3 4 5

- 1: — Series No.
2: — R:R/A Type
3: — No. of Positions
4: — Q: Tin Plated
5: — B: In Tube
C: In Tray

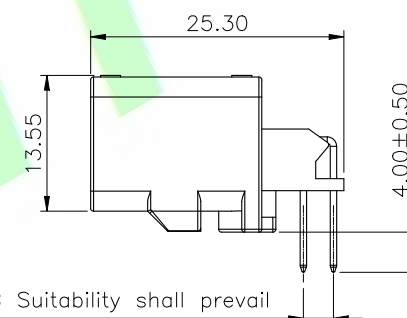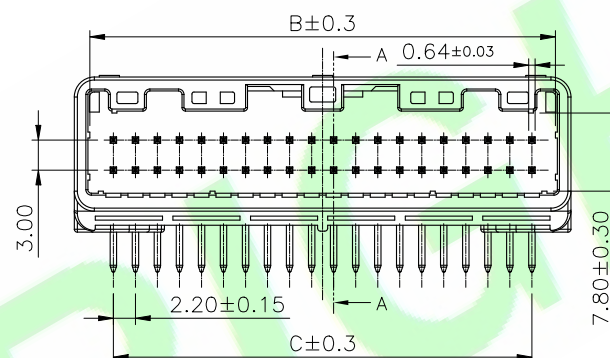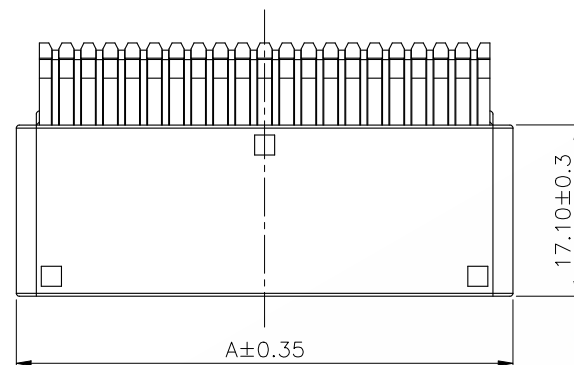

3.0 PCB Suitability shall prevail

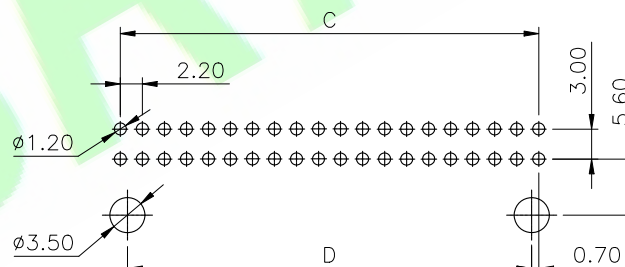

PCB LAYOUT (TOP VIEW)

Tolerance:±0.05mm

No. of PIN	A	B	C	D
12	18.8	15.7	11.0	9.6
16	23.2	20.1	15.4	14.0
24	32.0	28.9	24.2	22.8
28	36.4	33.3	28.6	27.2
32	40.8	37.7	33.0	31.6
40	49.8	46.4	41.8	40.4

5X			
4X			
3X			
2X			
1X	ORIGINAL	Hu.CH	
REV.	DESCRIPTION	DR.BY	ECN. NO.

DR.BY.:
Bruce
CHKD.:
Tony
APPD.:
Billy

GENERAL TOLERANCE:

LINEAR	ANGLES
X: ±5.0°	X: ±5.0°
X.X: ±0.30	X.X: ±3.0°
X.XX: ±0.20	X.XX: ±2.0°
X.XXX: ±0.10	X.XXX: ±1.0°

PART NO : A22011R-XXQ-01-X

DWG. NO.:

TITLE : 2.2mm Pitch Housing
Assembly R/A Type

DATE: 11-Sep-2024

HJBRIGHT® 东莞市華晶電子有限公司
BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 1/2


SCALE: 1:1

UNIT: mm




THIRD ANGLE PROJECTION


A4




12 PIN




16 PIN

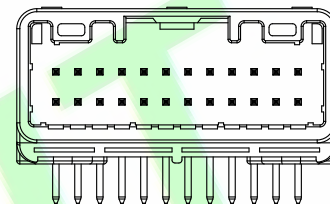


24 PIN

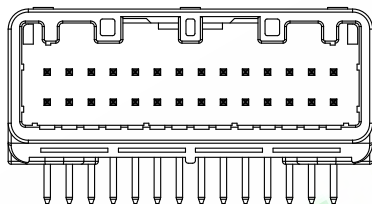


28 PIN

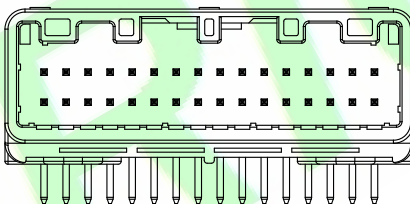

32 PIN

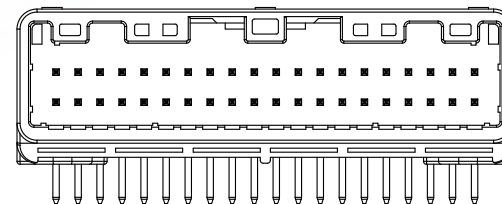

40 PIN

5X				DR.BY.: Bruce	GENERAL TOLERANCE:		PART NO : A22011R-XXQ-01-X	HJBRIGHT® 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED		
4X						LINEAR	ANGLES			
3X				CHKD.: Tony	x.:	x': ±5.0°	TITLE : 2.2mm Pitch Housing Assembly R/A Type	SHEET: 2/2		A4
2X					x.x: ±0.30	x.x': ±3.0°		SCALE: 1:1		
1X	ORIGINAL	Hu.CH		APPD.:	x.xx: ±0.20	x.xx': ±2.0°		UNIT: mm		
REV.	DESCRIPTION	DR.BY	ECN. NO.	Billy	x.xxx: ±0.10	x.xxx': ±1.0°	DATE: 11-Sep-2024		THIRD ANGLE PROJECTION	