

Specifications:

Material And Finish:

Insulator:PBT UL94V-0 Color:Natural

Contact:Brass

Plated:See Ordering Information

Rating:

Current Rating:3.0 Amp

Voltage Rating:12V AC/DC





Operating Temperature Range:-40°C~+125°C

Electrical:

Contact resistance:10m Ohm Max

Insulator resistance:100M ohm min.

Withstanding Voltage:1000V AC/Minute

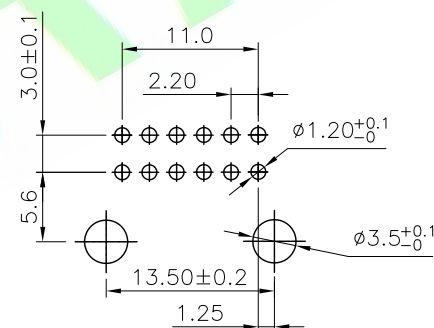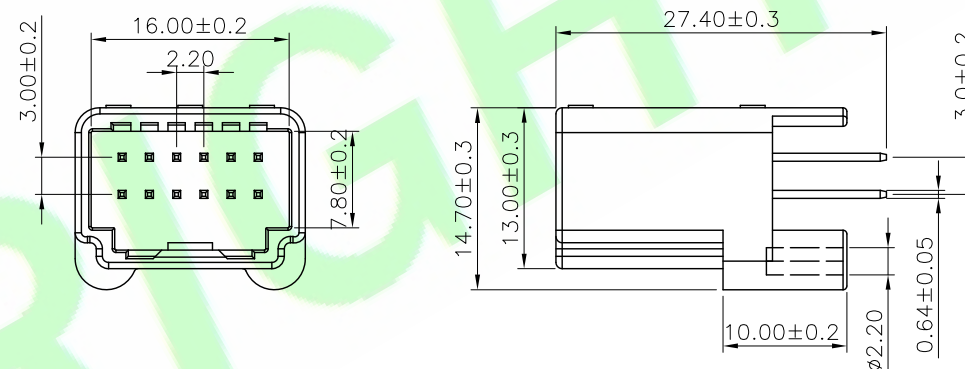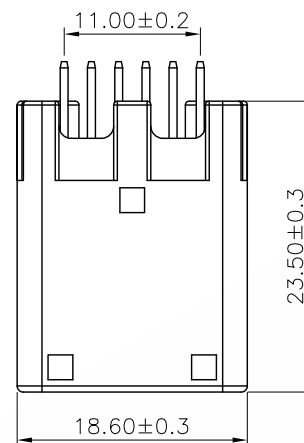

PCB LAYOUT

Ordering Information

A22011S-12Q-01-C

1 2 3 4 5


- 1: — Series No.
 2: — S: Straight Type
 3: — No. of Positions
 4: — Q: Tin Plated
 5: — C: In Tray

5X			
4X			
3X			
2X	Update code options	Judyyan	20221006
1X	ORIGINAL	Bruce	
REV.	DESCRIPTION	DR.BY	ECN. NO.

DR.BY.: Bruce
CHKD.: Tony
APPD.: Billy

GENERAL TOLERANCE:	
LINEAR	ANGLES
X.: ±5.0°	X.X: ±0.30
X.X: ±0.30	X.XX: ±0.20
X.XX: ±0.20	X.XXX: ±0.10
X.XXX: ±0.10	X.XXX: ±1.0°

PART NO : A22011S-12Q-01-C
DWG. NO.:
TITLE : 2.2mm Pitch PCB Header Connectors (Vertical Mount Type)
DATE: 3-Dec-2016

HJBRIGHT[®] 東莞市華晶電子有限公司		
BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED		
SHEET: 1/1	 THIRD ANGLE PROJECTION	A4
SCALE: 1:1		
UNIT: mm		