

Specifications:

Material And Finish:

Insulator:PBT UL94V-0 Color:Natural

Contact:Brass

Plated:See Ordering Information

Rating:

Current Rating:3.0 Amp

Voltage Rating:12V AC/DC

Operating Temperature Range:-40°C~+125°C

Electrical:

Contact resistance:10m Ohm Max

Insulator resistance:100M ohm min.





Withstanding Voltage:1000V AC/Minute

Ordering Information

A22011S-24Q-01-C

1 2 3 4 5

- 1: — Series No.
 2: — S: Straight Type
 3: — No. of Positions
 4: — Q: Tin Plated
 5: — C: In Tray

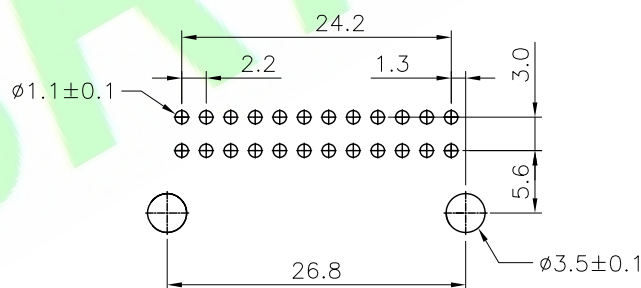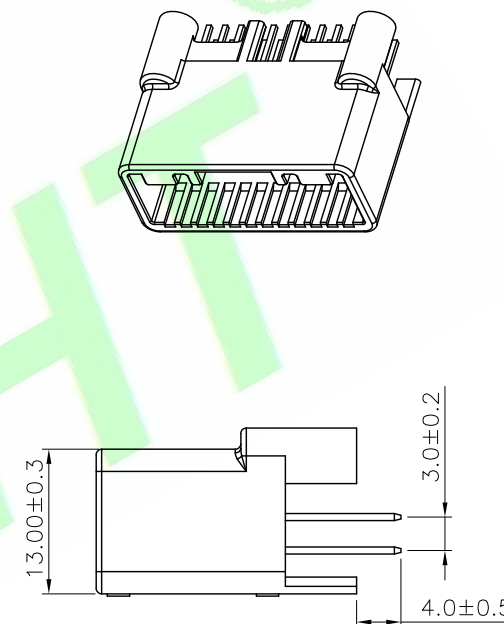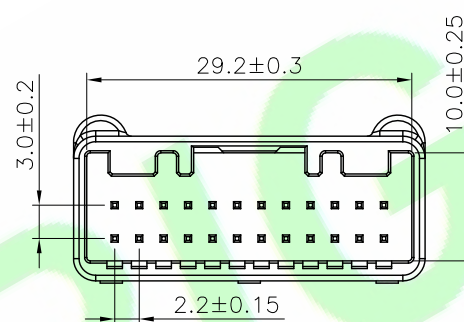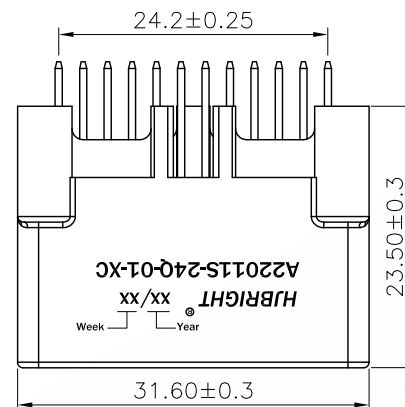

PCB LAYOUT
 GENERAL TOLERANCE:±0.05

5X				DR.BY.: Samson	GENERAL TOLERANCE:		PART NO : A22011S-24Q-01-C	HJBRIGHT® 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED		
4X					LINEAR	ANGLES	DWG. NO.:			
3X				CHKD.: Tony	x.: x.x: ±0.30	x*: ±3.0* x.x*: ±2.0*	TITLE : A22011S Series PCB Header(V-Type)	SHEET: 1/1		A4
2X	Update code options	Judyyan	20221006	APPD.: Billy	x.xx: ±0.20	x.xx*: ±1.0	DATE: 5-Jan-2016	SCALE: 1:1		
1X	ORIGINAL	Samson			x.xxx: ±0.10	x.xxx*: ±0.5*		UNIT: mm		
REV.	DESCRIPTION	DR.BY	ECN. NO.							