

Specifications:

Material And Finish:

Insulator: PBT UL94V-0

Color: See Ordering Information

Contact: Copper alloys

Plated: See Ordering Information

Rating:

Current Rating: 9 Amp (Power)

Voltage Rating: 16V DC

Operating Temperature Range: $-40^{\circ}\sim+105^{\circ}\text{C}$

Electrical:

Contact resistance: 20m Ohm Max

Insulator resistance: 100M ohm min.

Withstanding Voltage: 1000V AC/Minute

Ordering Information

A22300R1-26Q-01-BC

1 2 3 4 5 6

1: Series No.

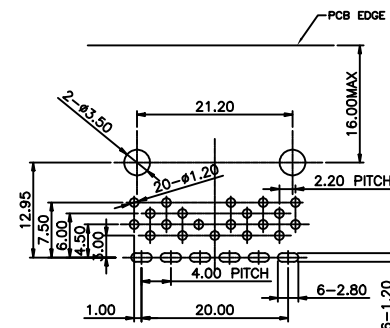
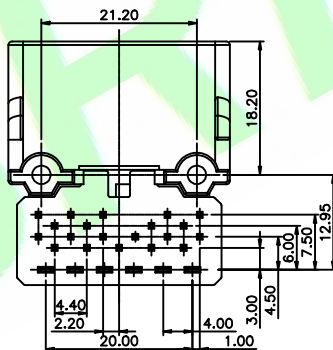





2: R1:R/A Type

3: No. of Positions

4: Q: Ni40-120u", Bright Tin 80-160u"

5: B: Black

6: C: In Tray

Recommended PCB LAYOUT (TOP VIEW)
Tolerance: $\pm 0.05\text{mm}$ DR.BY.:
Hu.CHCHKD.:
SamAPPD.:
Billy

GENERAL TOLERANCE:

LINEAR

ANGLES

X.: $\pm 5.0^{\circ}$ X.X: ± 0.35 X.X': $\pm 3.0^{\circ}$ X.XX: ± 0.25 X.XX': $\pm 2.0^{\circ}$ X.XXX: ± 0.15 X.XXX': $\pm 1.0^{\circ}$

PART NO : A22300R1-26Q-01-BC

DWG. NO.:

TITLE :

025/090 SERIES CAP ASSEMBLY


DATE: 29-Jul-2024

HJBRIGHT® 东莞市華晶電子有限公司
BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 1/1

SCALE: 1:1

UNIT: mm



THIRD ANGLE PROJECTION

A4

1X	ORIGINAL	Hu.CH	
REV.	DESCRIPTION	DR.BY	ECN. NO.