
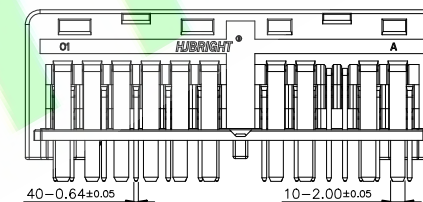

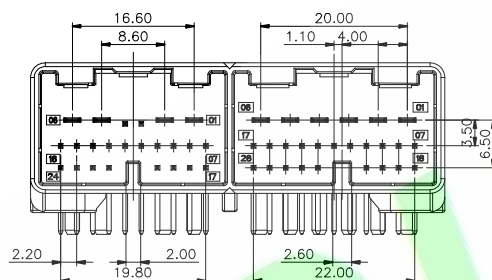
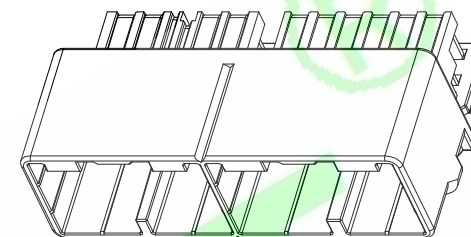


Specifications:  
 Material And Finish:  
 Insulator: PBT UL94V-0  
 Color: See Ordering Information  
 Contact: Copper alloys  
 Plated: See Ordering Information



Rating:  
 Current Rating: 9 Amp (Power)  
 Voltage Rating: 16V DC  
 Operating Temperature Range: -40°~+105°C

Electrical:  
 Contact resistance: 20m Ohm Max  
 Insulator resistance: 100M ohm min.  
 Withstanding Voltage: 1000V AC/Minute

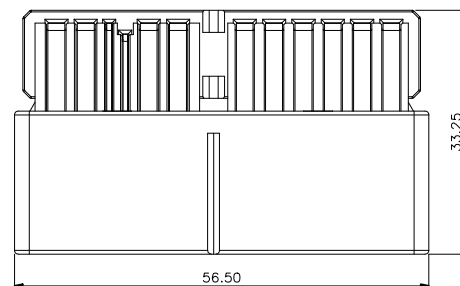

Ordering Information  
 A22300R1-50Q-01-BC  
 1 2 3 4 5 6

- 1: Series No.
- 2: R1:R/A Type
- 3: No. of Positions
- 4: Q: Ni40-120u", Bright Tin 80-160u"
- 5: B: Black
- 6: C: In Tray

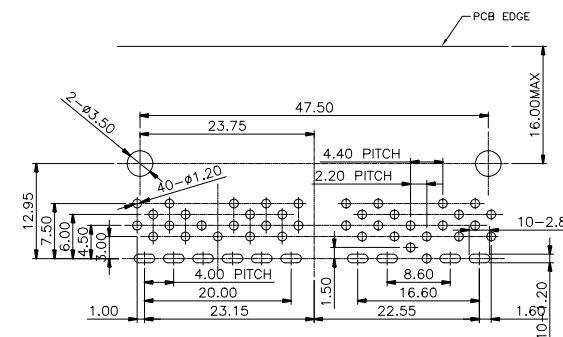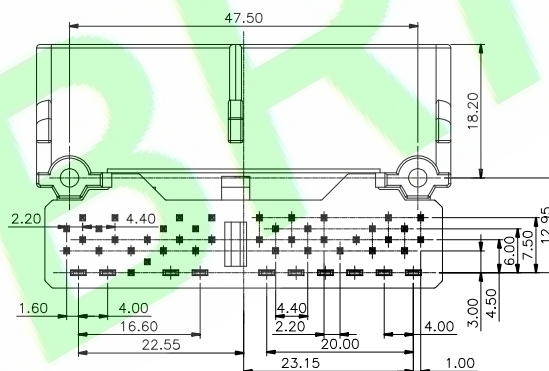


Recommended PCB LAYOUT (TOP VIEW)  
 Tolerance: ±0.05mm

DR.BY: Hu.CH	GENERAL TOLERANCE:		PART NO : A22300R1-50Q-01-BC
CHKD.: Sam	LINEAR	ANGLES	DWG. NO.:
	x.: ±0.35	x': ±5.0°	TITLE :
	x.xx: ±0.25	x.xx': ±2.0°	025/090 SERIES CAP ASSEMBLY
	x.xxx: ±0.15	x.xxx': ±1.0°	DATE: 27-Jul-2024
APPD.: Billy			

**HJBRIGHT** 東莞市華晶電子有限公司  
 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 1/1  
 SCALE: 1:1  
 UNIT: mm



**A4**

1X	ORIGINAL	Hu.CH	
REV	DESCRIPTION	DR.BY	ECN. NO.