
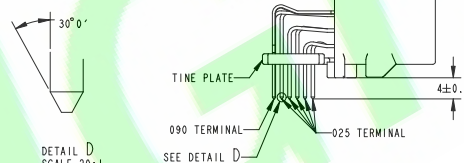
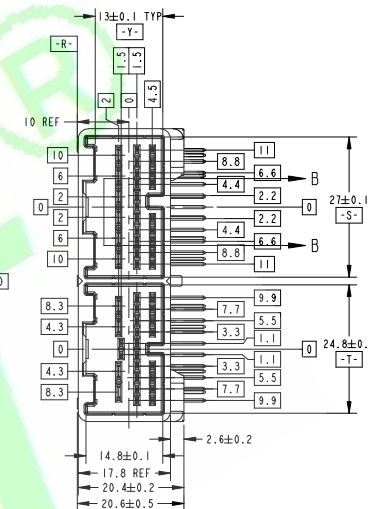


Withstanding Voltage: 1000V AC/Minute


$$\begin{array}{ccccccc} \overline{1} & \overline{2} & \overline{3} & \overline{4} & & \overline{5} & \overline{6} \\ & & & & & & \end{array}$$

- 1:— Series No.
- 2:— R1:R/A Type
- 3:— No. of Positions
- 4:— A1:Gold on contact,Tin on tail
- 5:— B: Black
N: Natural
- 6:— C: In Tray



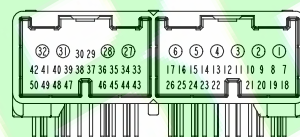


FIG. 1 CIRCUIT NUMBERS


THICKNESS OF PCB(mm)	1.2	1.6
NOMINAL LENGTH OF SCREW(mm)	5	6

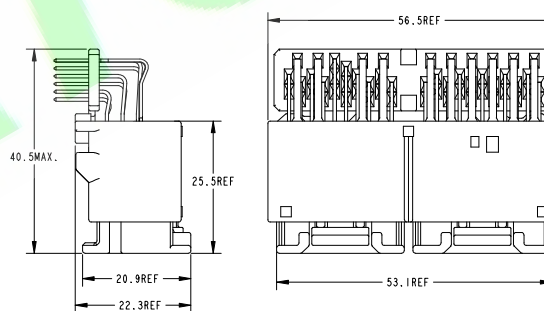

CAP ASSEMBLY AND PLUG ASSEMBLY ENGAGEMENT DRAWING

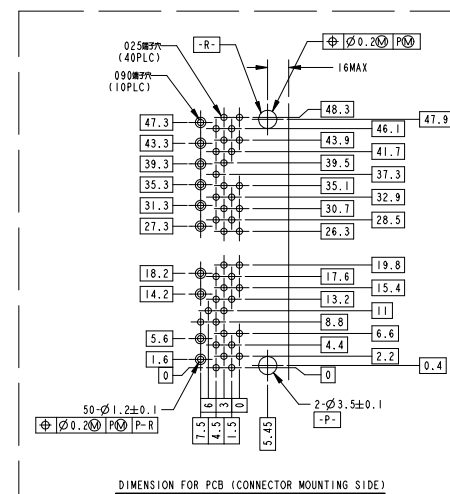

DIMENSION FOR PCB (CONNECTOR MOUNTING SIDE)

5X				DR.BY.: Hu.CH	GENERAL TOLERANCE:		PART NO : A22300R1-50X-02-XC		HJBRIGHT® 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED		
4X					LINEAR	ANGLES	DWG. NO.:				
3X				CHKD.: Sam	X.:	x': ±5.0°	TITLE : 0.25/090 SERIES CAP ASSEMBLY		SHEET: 1/2		A4
2X					X.X: ±0.25	x.X': ±3.0°			SCALE: 1:1		
1X	ORIGINAL	Hu.CH		APPD.: Billy	X.XX: ±0.15	x.XX': ±2.0°	DATE: 12-May-2022	UNIT: mm	THIRD ANGLE PROJECTION		
REV.	DESCRIPTION	DR.BY	ECN. NO.		X.XXX: ±0.05	x.XXX': ±1.0°					

HJBRIGHT® 東莞市華晶電子有限公司
BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

SHEET:	1/2
SCALE:	1:1
UNIT:	mm



THIRD ANGLE PROJECTION

A4