





RoHS Compliant

Specifications:
 Material And Finish:
 Insulator:LCP UL94V-0
 Contact:Copper alloy
 Plated:See Ordering Information


Rating:
 Current Rating:4.0Amp
 Voltage Rating:250V AC/DC
 Operating Temperature Range:-40~+125°C
 Contact Resistance:10mΩ Max
 Insulation Resistance:1000MΩ Min
 Withstanding Voltage: 1500V AC/minute

Ordering Information
 A25000R-XXQ-XX-X
 1 2 3 4 5 6


- 1:—Series No.
 2:—R:R/A Type
 3:—No. of Positions
 4:—Q:Tin Plated
 5:—01:A Type Black
 02:B Type Nature
 6:—B:In Tube
 C:In Tray

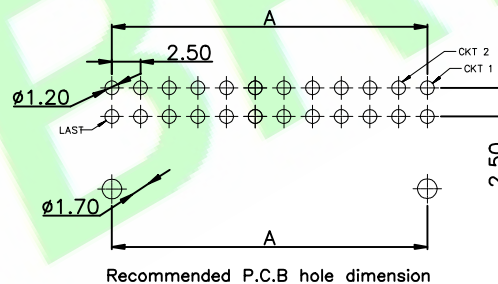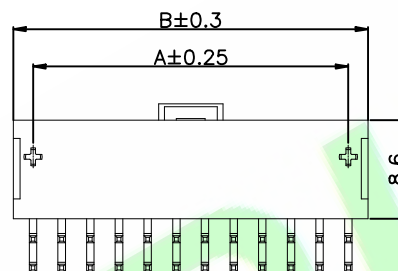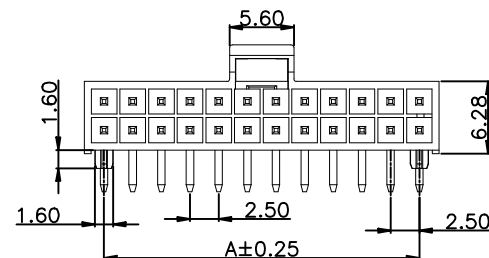

01:A Type Black



02:B Type Natural



Poles	Dimensions (mm)	
	A	B
04P	2.50	5.94
06P	5.00	8.44
08P	7.50	10.94
10P	10.00	13.44
12P	12.50	15.94
14P	15.00	18.44
16P	17.50	20.94
18P	20.00	23.44
20P	22.50	25.94
22P	25.00	28.44
24P	27.50	30.94

5X				DR.BY.: Judyyan	GENERAL TOLERANCE:		PART NO : A25000R-XXQ-XX-X
4X					LINEAR	ANGLES	DWG. NO.:
3X				CHKD.: Tony	X.: ±5.0°	X.X: ±3.0°	TITLE :
2X					X.XX: ±0.25	X.XX: ±2.0°	2.50mm PITCH 90° DUAL ROW WAFER
1X	ORIGINAL	Judyyan		APPD.: Billy	X.XXX: ±0.15	X.XXX: ±1.0°	DATE: 24-Jun-2019
REV.	DESCRIPTION	DR.BY	ECN. NO.				

HJBRIGHT® 東莞市華晶電子有限公司
 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 1/1
 SCALE: 1:1
 UNIT: mm



THIRD ANGLE PROJECTION

A4