

RoHS Compliant

Specifications:**Material And Finish:**

Insulator:PBT Color:Black
Contact:Brass
Plated:See Ordering Information

Rating:





Current Rating:5.0 Amp (20AWG)
Voltage Rating:12V AC/DC
Operating Temperature Range:-30°~+105°C


Contact resistance:10m Ohm Max
Insulator resistance:100M ohm min.
Withstanding Voltage:1000V /Max

Ordering Information**A25009S-20Q-01-C**

1 2 3 4 5

- 1: — Series No.
2: — R:R/A Type
3: — No. of Positions
4: — Q: Tin Plated
5: — C: In Tray

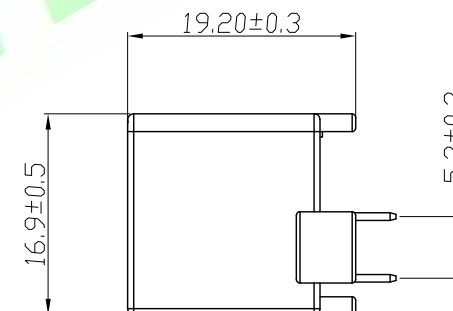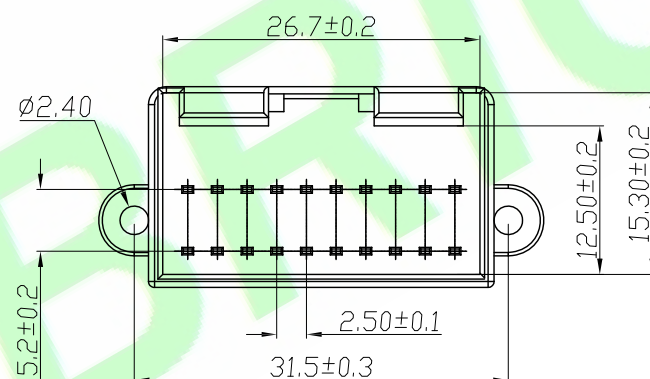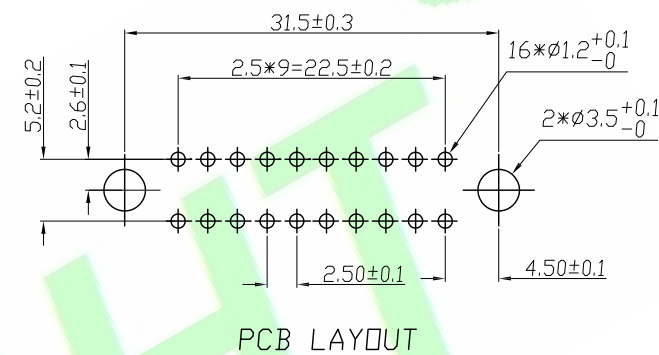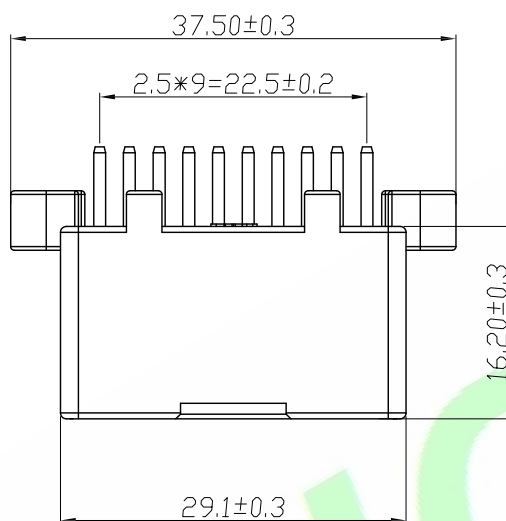

5X				DR.BY.: Samson	GENERAL TOLERANCE:		PART NO : A25009S-20Q-01-C	HJBRIGHT® 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED	
4X					LINEAR	ANGLES	DWG. NO.:		
3X				CHKD.: Tony	X.:	X': ±5.0°	TITLE :	SHEET: 1/1	 THIRD ANGLE PROJECTION
2X	Update code options	Judyyan	20220727		X.X: ±0.35	X.X': ±3.0°	2.50mm Multi-lock I/O Connector 20Pos. Cap Housing Assembly(Vertical type)	SCALE: 1:1	
1X	ORIGINAL	Samson		APPD.: Billy	X.XX: ±0.25	X.XX': ±2.0°	DATE: 10-Aug-2016	UNIT: mm	
REV.	DESCRIPTION	DR.BY	ECN. NO.		X.XXX: ±0.15	X.XXX': ±1.0°			A4