







Plated: See Ordering Information

Operating Temperature Range: $-55^{\circ}\sim+105^{\circ}\text{C}$

Withstanding Voltage:1500V AC/Minute

$$\frac{1}{2} \quad \frac{3}{4} \quad \frac{5}{6}$$

- 1:— Series No.
2:— R:R/A Type
3:— No. of Positions(4–20P)
4:— Q: Tin Plated
5:— C: In Tray

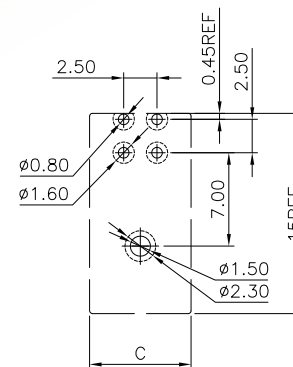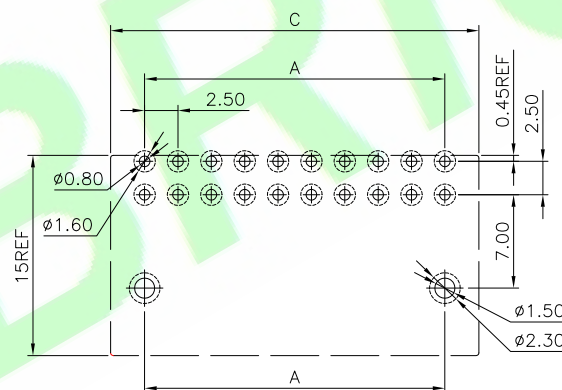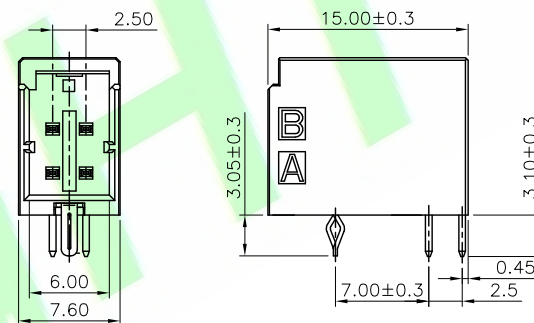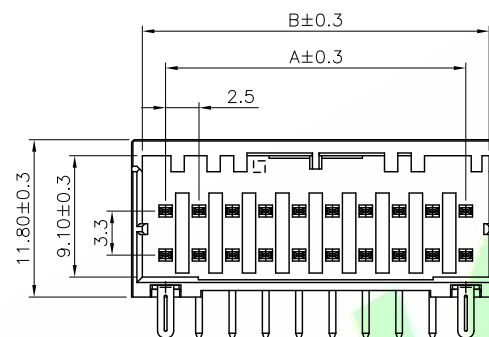

Recommended PCB Layout

2*2P PCB L

Poles	Dimensions (mm)		
	A	B	C
04P	2.50	6.00	7.60
06P	5.00	8.50	10.10
08P	7.50	11.00	12.60
10P	10.00	13.50	15.10
12P	12.50	16.00	17.60
16P	17.50	21.00	22.60
18P	20.00	23.50	25.10
20P	22.50	26.00	27.60

5X				DR.BY.: Samson	GENERAL TOLERANCE:		PART NO : A25018R-XXQ-01-C
4X					LINEAR	ANGLES	DWG. NO.:
3X				CHKD.: Tony	±0.40	±3.0°	TITLE : 2.50mm Pitch DYNAMIC 1200D HDR ASSY(4-20P) R/A Type
2X					x.x: ±0.30	x.x°: ±3.0°	
1X	ORIGINAL	Judyyan		APPD.:	x.xx: ±0.20	x.xx°: ±2.0°	
REV.	DESCRIPTION	DR.BY	ECN. NO	Billy	x.xxx: ±0.15	x.xxx°: ±1.0°	DATE: 15-Sep-2021

HJBRIGHT® 東莞市華晶電子有限公司
BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

SCALE: 1:1

UNIT: mm



THIRD ANGLE PROJECTION

A4