

RoHS Compliant



Specifications:

Material And Finish:

Insulator: PBT Color:Black

Contact:High Conductivity Copper

Plated:See Ordering Information

Rating:

Current Rating:6.0 Amp

Voltage Rating:12V AC/DC

Operating Temperature

Range:-40°~+105°C

Electrical:

Contact resistance:10m Ohm Max

Insulator resistance:100M Ohm min.

Dielectric Voltage:1000V AC/Minute

Ordering Information

A25120S-26X-01-X

1 2 3 4 5

1:— Series No.

2:— S:Straight Type

3:— No. of Positions






4:— S:Matte Tin Plated

5:— A:In Bag

B:In Tube

C:In Tray

G:Tape&Reel

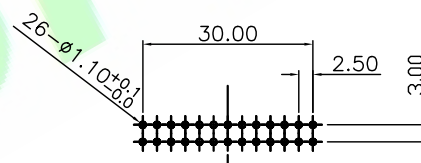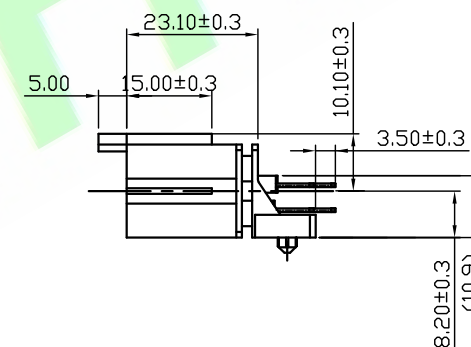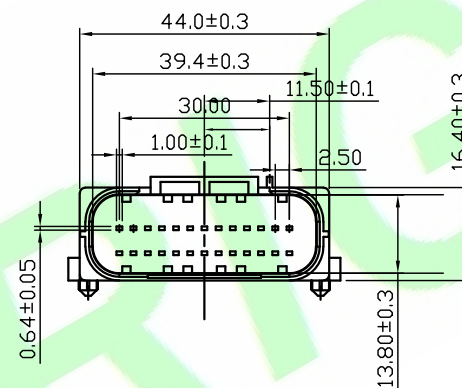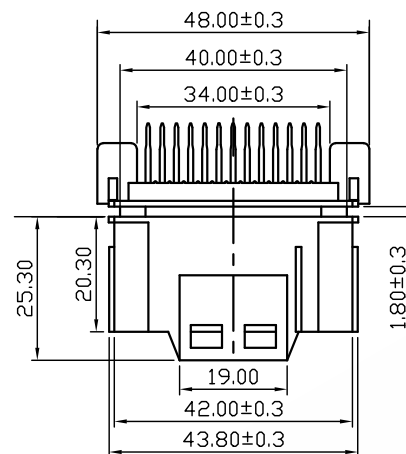

Recommended PCB LAYOUT (TOP VIEW)

Tolerance:±0.05mm

DR.BY.:
Zolin

GENERAL TOLERANCE:

LINEAR

ANGLES

PART NO : A25120S-26X-01-X

CHKD.:
Sam

X.:

X': ±5.0°

X.X: ±0.40

X.X': ±3.0°

DWG. NO.:

APPD.:
Billy

X.XX: ±0.25

X.XX': ±2.0°

X.XXX: ±0.15

X.XXX': ±1.0°

TITLE :

26 PIN CONDUCTORS STANDARD PIN
HEADER

DATE: 22-Jan-2022

HJBRIGHT® 东莞市華晶電子有限公司
BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 1/1

SCALE: 1:1

UNIT: mm



THIRD ANGLE PROJECTION

A4

1X	ORIGINAL	Zolin	
REV	DESCRIPTION	DR.BY	ECN. NO.