
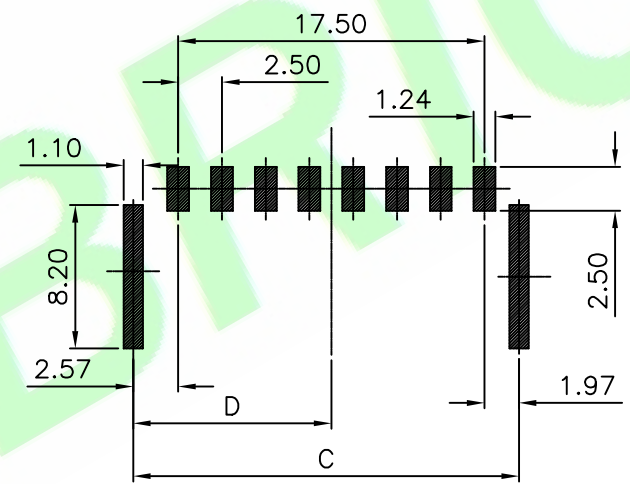
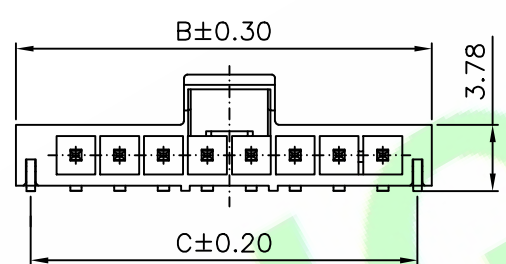


Specifications:
Material And Finish:
Insulator:LCP UL94V-0 Color:Black
Contact:Brass
Plated:See Ordering Information




Rating:
Current Rating: 5Amp
Voltage Rating:250V AC/DC
Operating Temperature Range:-40~+105°C
Contact Resistance:10mΩ Max
Insulation Resistance:1000MΩ Min
Withstanding Voltage: 1500V AC/minute

Ordering Information
A2521H-XXX-XX-G
1 2 3 4 5

- 1: — Series No.
- 2: — H:Horizontal SMT Type
- 3: — No. of Positions
- 4: — A:Gold Flash
H:Selective Gold Plated
Q:Tin Plated
S:Matte Tin Plated
- 5: — G:In Tape&Reel

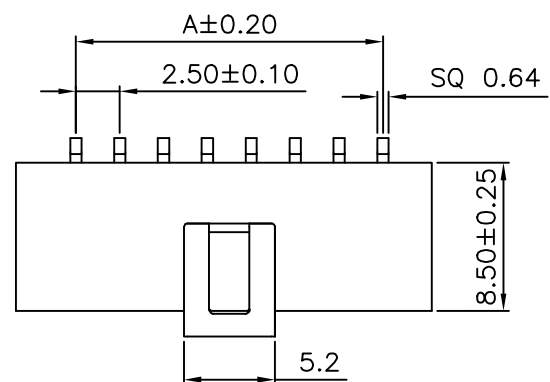

Recommended PCB Layout
(Tolerance:0.05mm)

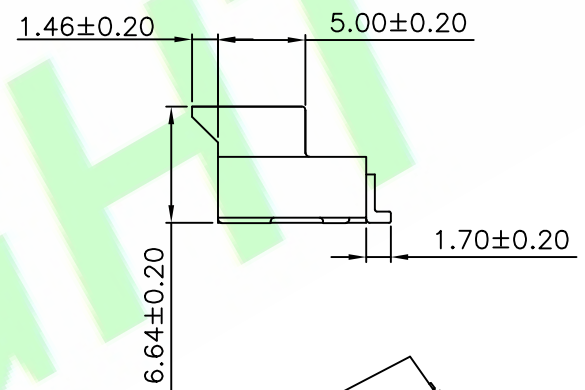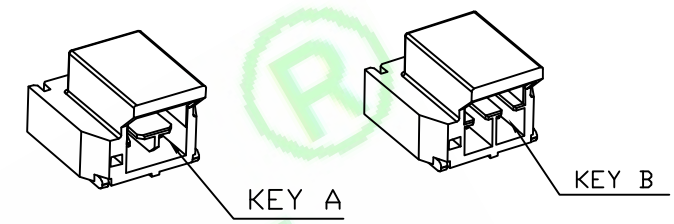

Circuit	Dimensions			
	A	B	C	D
02P	2.50	8.74	7.04	3.82
03P	5.00	11.24	9.54	5.07
04P	7.50	13.74	12.04	6.32
05P	10.00	16.24	14.54	7.57
06P	12.50	18.74	17.04	8.82
07P	15.00	21.24	19.54	10.07
08P	17.50	23.74	22.04	11.32

DR.BY.: Aaron	GENERAL TOLERANCE:		PART NO : A2521H-XXX-XX-G	
CHKD.: Tony	LINEAR	ANGLES	DWG. NO.:	
	X.:	X': ±5.0°	TITLE :	
	X.X: ±0.10	X.X': ±3.0°	2.50MM PITCH CONN 90°WAFER	
APPD.: Billy	X.XX: ±0.05	X.XX': ±2.0°	DATE:	
	X.XXX: ±0.03	X.XXX': ±1.0°		

HJBRIGHT® 東莞市華晶電子有限公司
BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 1/1
SCALE: 10:1
UNIT: mm

THIRD ANGLE PROJECTION

A4

1X	ORIGINAL	Aaron	
REV.	DESCRIPTION	DR.BY	ECN. NO.