

RoHS Compliant








Specifications:
Material And Finish:
Insulator: PA9T UL94V-0 Color:Black
Contact: Copper alloys
Plated:See Ordering Information

Rating:
Current Rating: 3 Amp
Voltage Rating: 24V DC
Operating Temperature Range:-40°~+105°C

Electrical:
Contact resistance:20m ohm Max
Insulator resistance:100M ohm min
Withstanding Voltage:1000V AC/Minute

Ordering Information
A254013R-40Q-01-BC
1 2 3 4 5 6

- 1: — Series No.
2: — R:R/A Type
3: — No. of Positions
4: — Q: Bright Tin
5: — B: Black
6: — C: In Tray

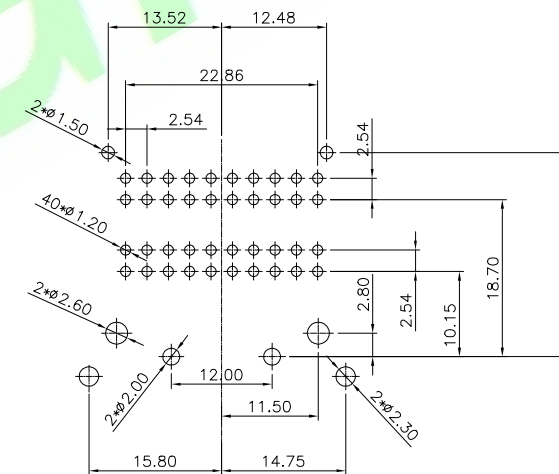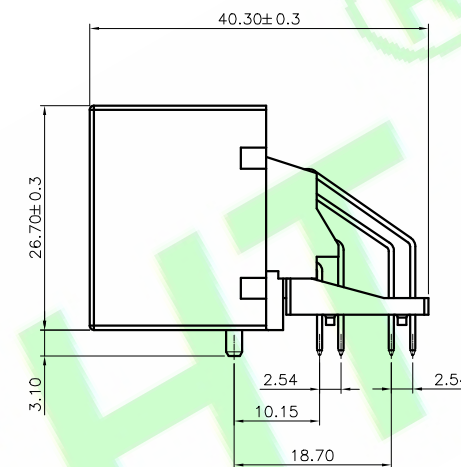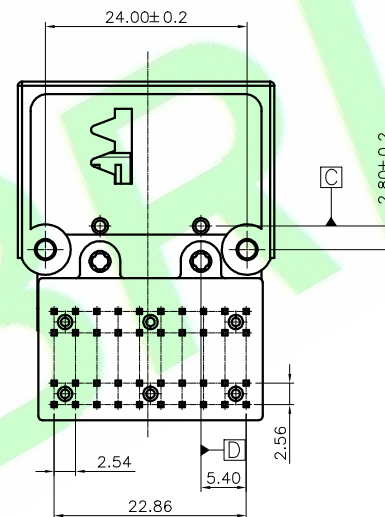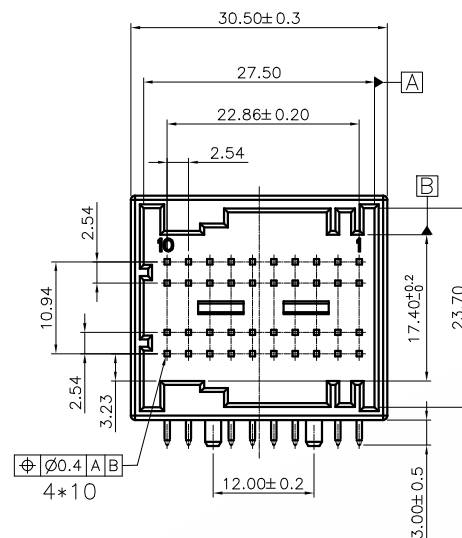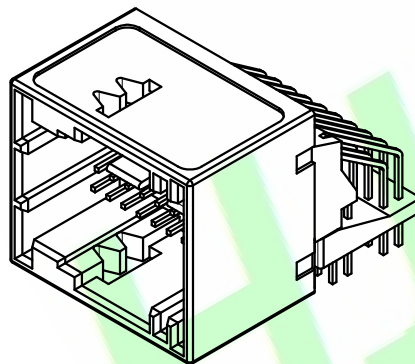


Recommended PCB LAYOUT

DR.BY.: Judyyan	GENERAL TOLERANCE:		PART NO : A254013R-40Q-01-BC	
	LINEAR	ANGLES	DWG. NO.:	
CHKD.: Hu.ch	x.:	x': ±5.0°	TITLE : 2.54Pitch Wafer R/A Type 40PIN	
	x.x: ±0.35	x.x': ±3.0°		
APPD.: Billy	x.xx: ±0.25	x.xx': ±2.0°	DATE: 12-Apr-2024	
	x.xxx: ±0.15	x.xxx': ±1.0°		

HJBRIGHT® 东莞市華晶電子有限公司
BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 1/1
SCALE: 1:1
UNIT: mm



THIRD ANGLE PROJECTION

A4

1X	ORIGINAL	Judyyan	ECN. NO.
REV	DESCRIPTION	DR.BY	