







Electrical:
Contact resistance:10m Ohm Max
Insulator resistance:1000M ohm min.
Withstanding Voltage:500V AC/Minute




A-A


$$\overline{1} \quad \overline{2} \quad \overline{3} \quad \overline{4} \quad \overline{5} \quad \overline{6}$$

- 1: — Series No.
- 2: — R:R/A Type
- 3: — No. of Positions
- 4: — S:1um~4um Sn over
1.3um~2.5um Nickel
- 5: — A1:A1 Type
A2:A2 Type
B1:B1 Type
B2:B2 Type
- 6: — D:In Tape&Reel

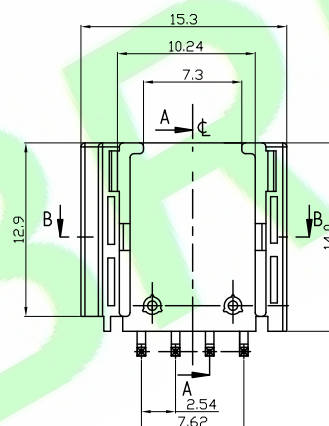

PCB LAYOUT: A1/B1 Type



PCB LAYOUT: A2/B2 Type

Technical drawing of the 150-015 component. The drawing shows a rectangular component with four pins on the left side, numbered 1, 2, 3, and 4 from left to right. The component has a width of 1.50^{+0.15} and a height of 1.10^{+0.15}. The drawing is a top-down view.

5X				DR.BY:	GENERAL TOLERANCE:		PART NO : A25414R-04S-XX-D		HJBRIGHT® 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED		
4X				Judyyan	LINEAR	ANGLES	DWG. NO.:				
3X				CHKD.:	X.: ±0.30	X': ±5.0°	TITLE : 2.54mm Pitch PIN HEADER,4POS MQS		SHEET: 1/1		A4
2X				Tony	X.X: ±0.25	X.X': ±3.0°			SCALE: 1:1		
1X	ORIGINAL	Judyyan		APPD.:	X.XX: ±0.15	X.XX': ±2.0°	DATE: 11-Oct-2021	UNIT: mm	THIRD ANGLE PROJECTION		
REV.	DESCRIPTION	DR.BY	ECN. NO.	Billy	X.XXX: ±0.10	X.XXX': ±1.0°					

THIRD ANGLE PROJECTION

A4