

Specifications:

Material And Finish:

Insulator:PA6T UL94V-0 Color:Nature

Contact:Brass

Plated:NI:1.3um~2.2um,SN:1um~3um

Rating:

Current rating:3.0A

Voltage rating:250V AC/DC






Operating temperature range:-40°C~+80°C

Electrical:

Contact resistance:20m Ohm max.

Insulator resistance:1000M Ohm min.

Withstanding voltage:500V AC/Minute

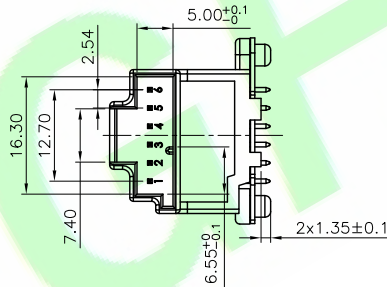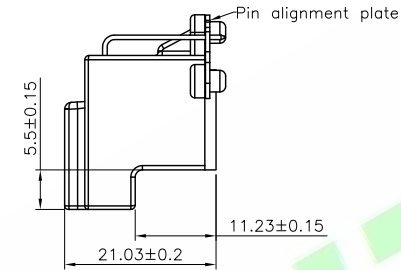

Ordering Information

A25414R-06Q-02-NF

1 2 3 4 5 6

1: — Series No.


2: — No. of Positions

3: — R:R/A Type

4: — Q:NI:1.3um~2.2um,SN:1um~3um

5: — N:Natural

6: — F:Cap+Tape&Reel



Recommended PCB Layout

5X				DR.BY.: Aaron	GENERAL TOLERANCE:		PART NO : A25414R-06Q-02-NF	HJBRIGHT® 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED							
4X					LINEAR ANGLES		BURY P/N:								
3X				CHKD.: Tony	X.: ±0.30	X': ±5.0°	TITLE : 2.54mm Pitch MQS-6pin_socket	SHEET: 1/1		A4					
2X	Update Code options	Judyyan	20221126	APPD.: Aaron	X.X: ±0.20	X.X': ±3.0°		SCALE: 1:1							
1X	ORIGINAL	Aaron			X.XX: ±0.10	X.XX': ±2.0°		UNIT: mm							
REV.	DESCRIPTION	DR.BY	ECN. NO	Billy	X.XXX:	X.XXX': ±1.0°	DATE: 15-Dec-2017								
1		2		3		4		5		6		7		8	