

Specifications:

Material And Finish:

Insulator:PA9T UL94V-0
Contact:High Conductivity Copper
Plated:See Ordering Information

Rating:

Current Rating:7.5 Amp
Voltage Rating:12V AC/DC
Operating Temperature
Range:-40~+105°C








Electrical:

Contact resistance:20m Ohm Max
Insulator resistance:100M ohm min.
Withstanding Voltage:1000V AC/Minute

Ordering Information

A25414R3-04S-01-X
1 2 3 4 5


- 1: — Series No.
- 2: — R:R/A Type
- 3: — No. of Positions
- 4: — S:Matte Tin Plated
- 5: — A:In Bag
B:In Tube
C:In Tray
G:Tape&Reel

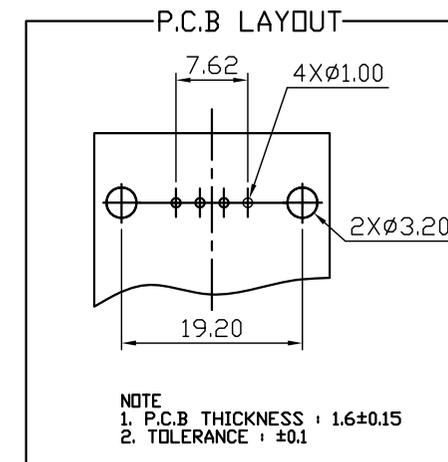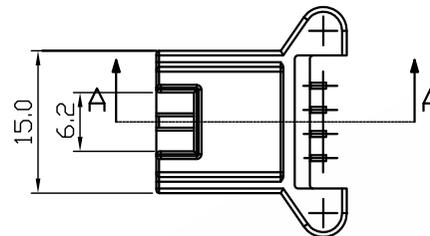

DR.BY.: Zolin	GENERAL TOLERANCE:		PART NO : A25414R3-04S-01-X	
CHKD.: Sam	LINEAR	ANGLES	DWG. NO.:	
APPD.: Billy	x.: ±0.30	x': ±5.0'	TITLE : MQS 4P CAP ASSEMBLY (HORIZONTAL TYPE)	
	x.xx: ±0.25	x.x': ±3.0'	DATE: 08-Mar-2026	
	x.xxx: ±0.15	x.xxx': ±1.0'		

HJBRIGHT® 东莞市華晶電子有限公司
BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 1/1
SCALE: 1:1
UNIT: mm



THIRD ANGLE PROJECTION

A4

1X	ORIGINAL	Zolin	
REV	DESCRIPTION	DR.BY	ECN. NO.