

Specifications:

Material And Finish:

Insulator:LCP UL94V-0

Color:Black

Contact:Brass

Plated:15u" Gold In Contact;100u" Matte

Tin-Lead on soloer Tall all over 50u" Nicke

Rating:

Current Rating:3.0 Amp

Voltage Rating:267V AC/DC

Operating Temperature Range:-40°~+120°C

Electrical:

Contact resistance:15m Ohm Max

Insulator resistance:5000M ohm min.

Withstanding Voltage:600V AC/Minute

Ordering Information

A2541M-XXX-03-XX

1 2 3 4 5 6

1:—Series No.








2:—S:Straight Type

3:—No. of pins

4:—L:15μ" Gold on contact;Matte Tin on tail

5:—B:Black

6:—F:W/Cap In Tape&Reel

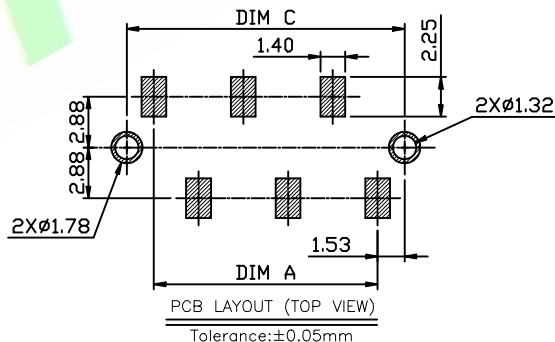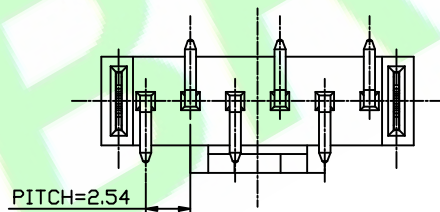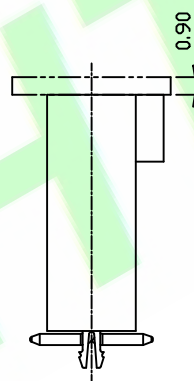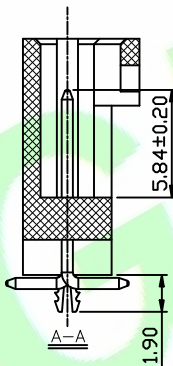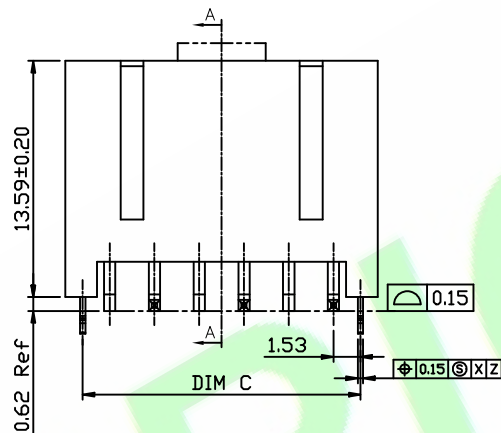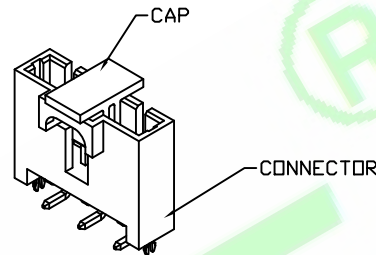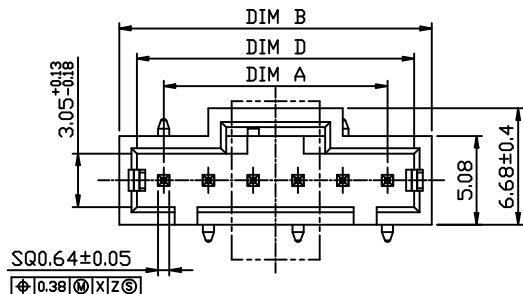

64.01	64.02	65.91	60.96	25
61.47	61.48	63.37	58.42	24
58.93	58.94	60.83	55.88	23
56.39	56.40	58.29	53.34	22
53.85	53.86	55.75	50.80	21
51.31	51.32	53.21	48.26	20
48.77	48.78	50.67	45.72	19
46.23	46.24	48.13	43.18	18
43.69	43.70	45.59	40.64	17
41.15	41.16	43.05	38.10	16
38.61	38.62	40.51	35.56	15
36.07	36.08	37.97	33.02	14
33.53	33.54	35.43	30.48	13
30.99	31.00	32.89	27.94	12
28.45	28.46	30.35	25.40	11
25.91	25.92	27.81	22.86	10
23.37	23.38	25.27	20.32	09
20.83	20.84	22.73	17.78	08
18.29	18.30	20.19	15.24	07
15.75	15.76	17.65	12.70	06
13.21	13.22	15.11	10.16	05
10.67	10.68	12.57	7.62	04
8.13	8.14	10.03	5.08	03
5.59	5.60	7.49	2.54	02
D	C	B	A	PIN

DR.BY.:

Hu.CH

GENERAL TOLERANCE:

LINEAR

ANGLES

PART NO : A2541M-XXL-03-BF

DWG. NO.:

TITLE :

2.54mm PITCH WAFER SMT TYPE

DATE: 21-Qct-2024


HJBRIGHT® 东莞市華晶電子有限公司

BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 1/1

SCALE: 1:1

UNIT: mm



THIRD ANGLE PROJECTION

A4

1X	ORIGINAL	Hu.CH	
REV	DESCRIPTION	DR.BY	ECN. NO.