


■ SPECIFICATIONS

- Voltage rating: 250V AC, DC
- Current rating: 3A, AC, DC
- Withstanding Voltage: 1000V AC/minute
- Insulation resistance: 1000MΩmin
- Temperature range: -25°C~+85°C
- Contact resistance: Intial value/10mΩmax
- After enviornmental testing/20mΩmax

Ordering Information

A2547HA-2XX-POBKX
 1 2 3 4 5

- 1: Series No.
- 2: No. of Positions
- 3: PO: PBT UL94V-0
- 4: Color: BK-Black
- 5: Option: 1 TYPE (No convex platform)
 2 TYPE (Single convex platform)
 3 TYPE (Double convex platform)

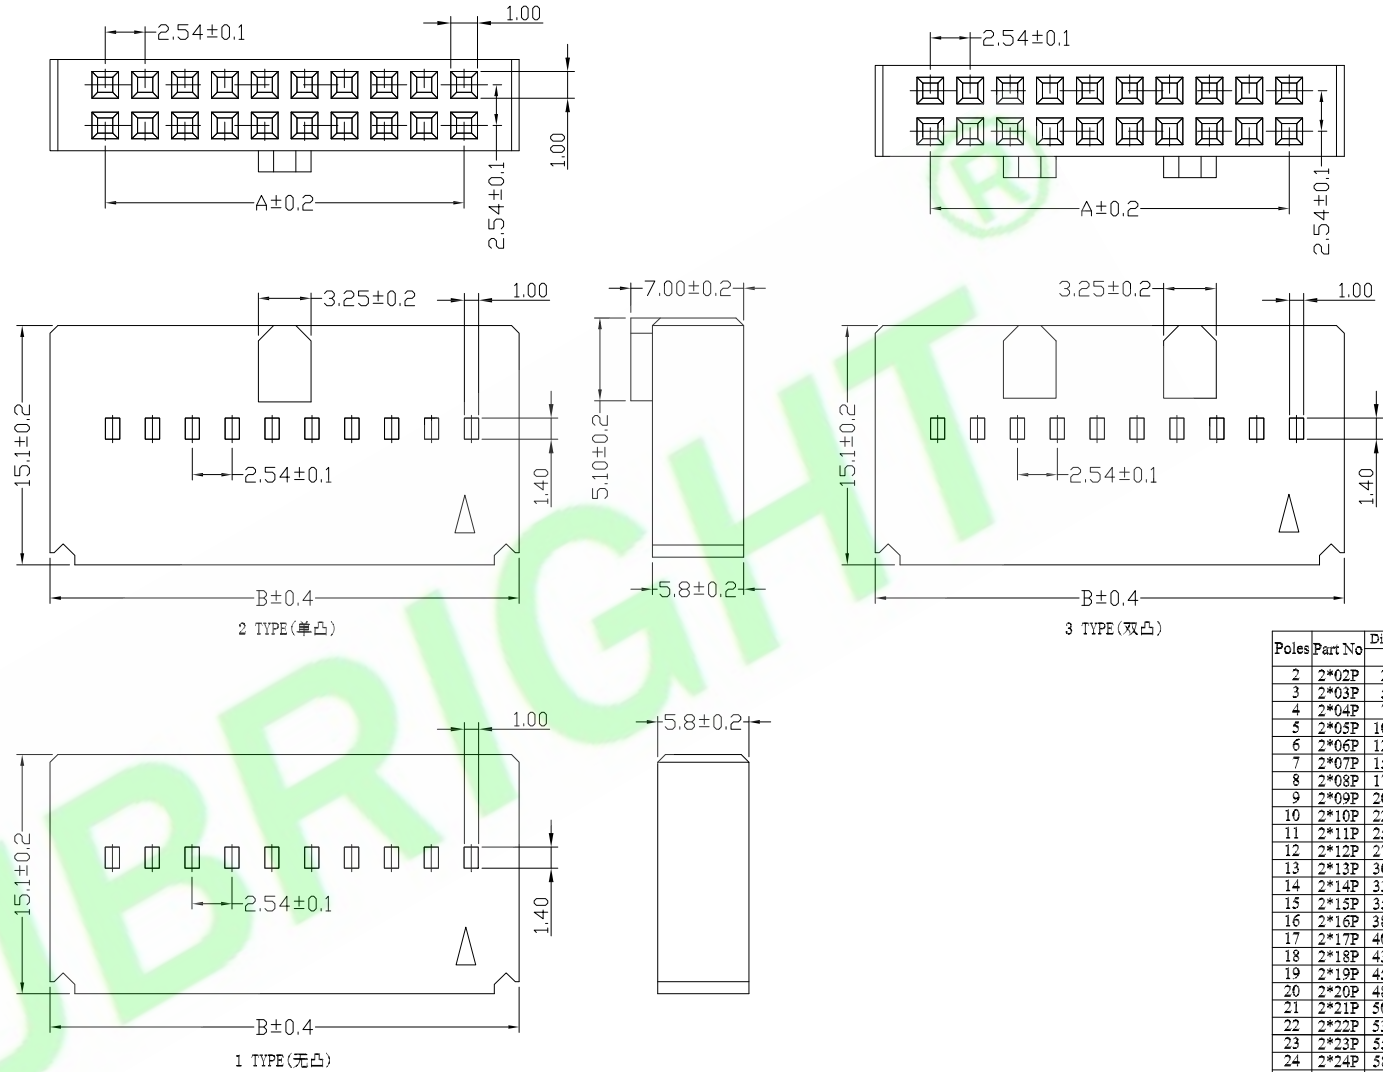

Poles	Part No	Dimensions (mm)	
		A	B
2	2*02P	2.54	9.54
3	2*03P	5.08	12.08
4	2*04P	7.62	14.62
5	2*05P	10.16	17.16
6	2*06P	12.70	19.70
7	2*07P	15.24	22.24
8	2*08P	17.78	24.78
9	2*09P	20.32	27.32
10	2*10P	22.86	29.86
11	2*11P	25.40	32.40
12	2*12P	27.94	34.94
13	2*13P	30.48	37.48
14	2*14P	33.02	40.02
15	2*15P	35.56	42.56
16	2*16P	38.10	45.10
17	2*17P	40.64	47.64
18	2*18P	43.18	50.18
19	2*19P	45.72	52.72
20	2*20P	48.26	55.26
21	2*21P	50.80	57.80
22	2*22P	53.34	60.34
23	2*23P	55.88	62.88
24	2*24P	58.42	65.42
25	2*25P	60.96	67.96
26	2*26P	63.50	70.50
27	2*27P	66.04	73.04
28	2*28P	68.58	75.58
29	2*29P	71.12	78.12
30	2*30P	73.66	80.66
31	2*31P	76.20	83.20
32	2*32P	78.74	85.74

5X			
4X			
3X			
2X			
1X	ORIGINAL	Samson	
REV.	DESCRIPTION	DR.BY	ECN. NO.

DR.BY.: Samson	GENERAL TOLERANCE:	
CHKD.: Tony	LINEAR	ANGLES
APPD.: Billy	x.: ±0.30	x': ±5.0°
	x.x: ±0.20	x.x': ±3.0°
	x.xx: ±0.15	x.xx': ±2.0°
	x.xxx: ±0.10	x.xxx': ±1.0°

PART NO : A2547HA-2XX-POBKX
DWG. NO.:
TITLE : 2.54mm Pitch Housing
DATE: 12-Mar-2018

HJBRIGHT® 东莞市華晶電子有限公司
 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 1/1
 SCALE: 1:1
 UNIT: mm

THIRD ANGLE PROJECTION

A4