

RoHS Compliant

Specifications:

Material And Finish:

Insulator:PA46 UL94V-0 Color:Black

Contact:Brass

Plated:See Ordering Information

Rating:

Current Rating:3.0 Amp (22AWG)

Voltage Rating:250V AC/DC



Operating Temperature Range:-40°~+125°C

Electrical:

Contact resistance:20m Ohm Max

Insulator resistance:1000M ohm min.

Withstanding Voltage:1000V AC/Minute

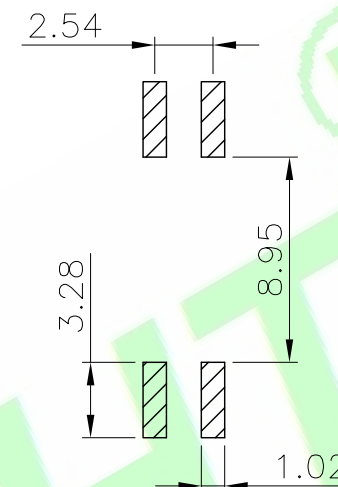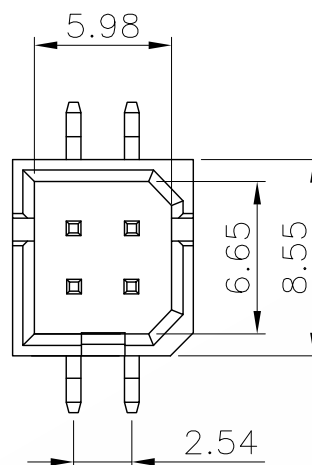

PCB LAYOUT

Ordering Information

A254800M-04X-01-X

1 2 3 4 5

1: — Series No.

2: — M:SMT Type

3: — No. of Positions

4: — A:Gold Flash

H:Selective Gold Flash

T:10u" Gold on contact;Tin on tail

M:15u" Gold on contact;Tin on tail



Q:Tin Plated

S:Matte Tin Plated

5: — B:In Tube

G:W/O in Tap&Reel

F:W/Cap in Tap&Reel

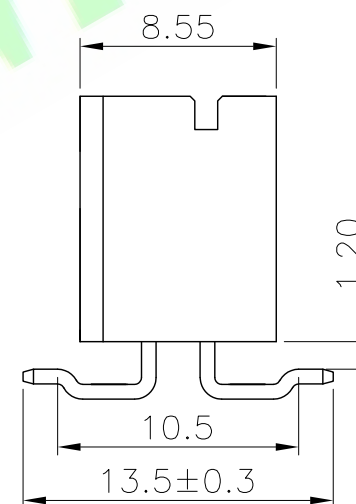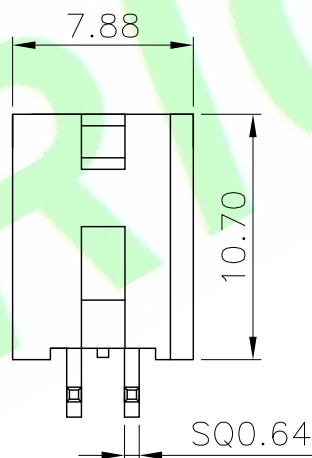

5X				DR.BY.: Samson	GENERAL TOLERANCE:		PART NO : A254800M-04X-01-X	HJBRIGHT® 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED		
4X					LINEAR	ANGLES	DWG. NO.:			
3X				CHKD.: Tony	x.: ±0.40	x': ±5.0°	TITLE : 2.54mm Pitch Wafer SMT Type	SHEET: 1/1		A4
2X	Update Code options	Judyyan	20221215		x.x: ±0.30	x.x': ±3.0°		SCALE: 1:1		
1X	ORIGINAL	Samson		APPD.: Billy	x.xx: ±0.20	x.xx': ±2.0°	DATE: 15-Sep-2021	UNIT: mm		
REV.	DESCRIPTION	DR.BY	ECN. NO.		x.xxx: ±0.10	x.xxx': ±1.0°				