

RoHS Compliant

Specifications:

Material And Finish:

Insulator:PA66 UL94V-0 Color:Natural

Contact:Brass

Plated:See Ordering Information

Rating:

Current Rating:3.0 Amp (22AWG)

Voltage Rating:250V AC/DC



Operating Temperature Range:-40°~+125°C

Electrical:

Contact resistance:20m Ohm Max

Insulator resistance:1000M ohm min.

Withstanding Voltage:1000V AC/Minute

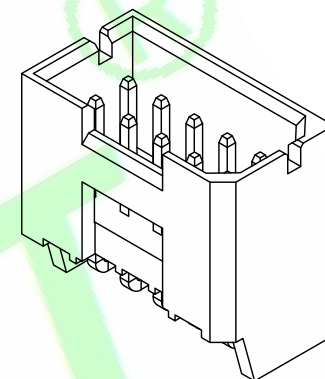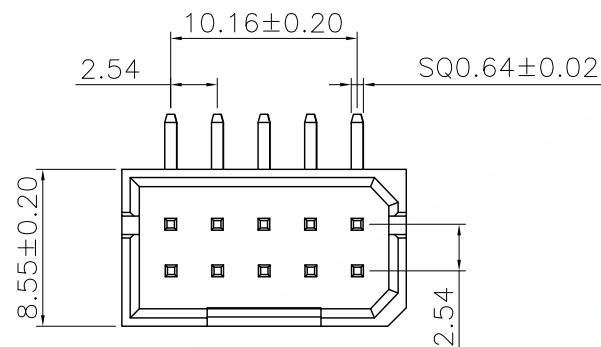

Ordering Information

A254800R-10X-01-X

1 2 3 4 5

1: — Series No.

2: — R/R/A Type

3: — No. of Positions

4: — A:Gold Flash

H:Selective Gold Flash

T:10u" Gold on contact;Tin on tail

M:15u" Gold on contact;Tin on tail


Q:Tin Plated

S:Matte Tin Plated



5: — A:In bag

B:In Tube

C:In Tray

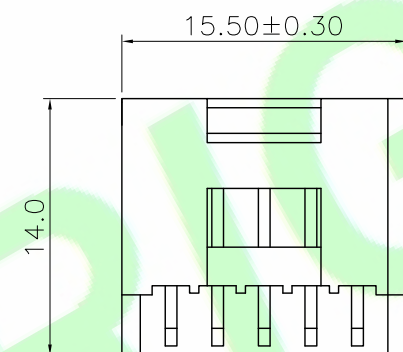

5.00±0.20

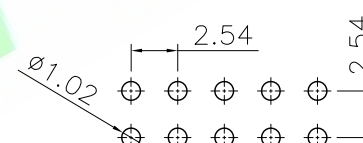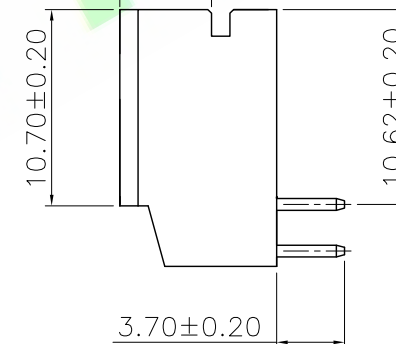

P. C. B Hole Layout

5X				DR.BY.: Samson	GENERAL TOLERANCE:		PART NO : A254800R-10X-01-X	HJBRIGHT® 东莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED			A4
4X				CHKD.: Tony	LINEAR	ANGLES	DWG. NO.:				
3X				APPD.: Billy	X.: ±0.40	X': ±5.0°	TITLE : 2.54mm Pitch Wafer R/A Type	SHEET: 1/1	THIRD ANGLE PROJECTION		
2X	Update Code options	Judyyan	20221215		X.X: ±0.30	X.X': ±3.0°	DATE: 15-Sep-2021	SCALE: 1:1			
1X	ORIGINAL	Samson			X.XX: ±0.20	X.XX': ±2.0°		UNIT: mm			
REV.	DESCRIPTION	DR.BY	ECN. NO.		X.XXX: ±0.10	X.XXX': ±1.0°					