

RoHS Compliant

Specifications:

Material And Finish:

Insulator:PA9T ,UL94V-0

Contact:Brass

Rating:

Current Rating:8A AC/DC

Voltage Rating:250V AC/DC






Operating Temperature Range:-40°~+105°C

Electrical:

Contact resistance:10m Ohm Max

Insulator resistance:1000M ohm min.

Withstanding Voltage:1500V AC/Minute

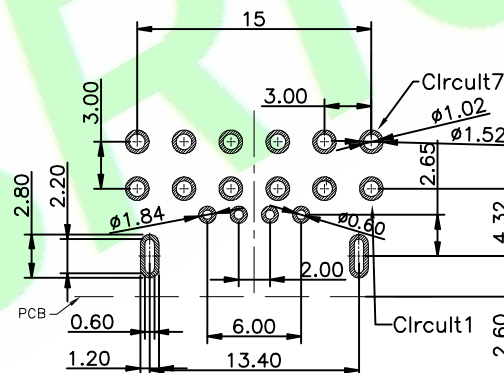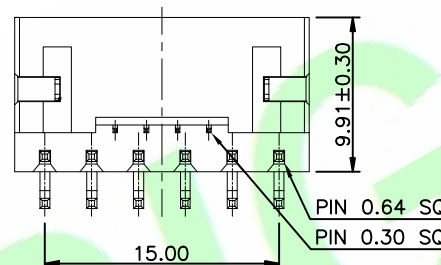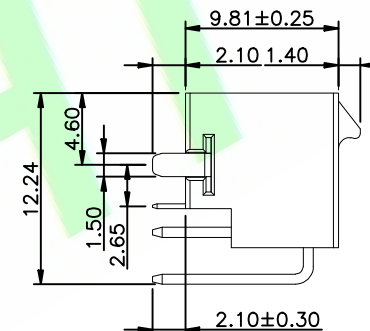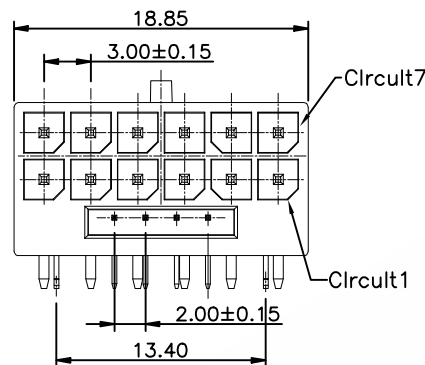

P.C.B LAYOUT

Ordering Information

A30002R-16Q-01-BX

1 2 3 4 5 6

- 1: — Series No.
- 2: — R:R/A Type
- 3: — No. of Positions
- 4: — Q: Tin Plated
- 5: — B: Black
- 6: — A: In Bag
B: In Tube
C: In Tray

1X	ORIGINAL	Jamin
REV.	DESCRIPTION	DR.BY

DR.BY.: Jamin	GENERAL TOLERANCE:		PART NO : A30002R-16Q-01-BX
CHKD.: Judyann	LINEAR	ANGLES	DWG. NO.:
APPD.: Billy	X.: ±0.30	X': ±3.0°	TITLE :
	X.X: ±0.25	X.X':	3.00&2.00mm Pitch Wafer R/A Type
	X.XXX: ±0.15	X.XXX':	DATE: 13-May-2023

HJBRIGHT ® 東莞市華晶電子有限公司	
BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED	
SHEET: 1/1	 THIRD ANGLE PROJECTION
SCALE: 1:1	
UNIT: mm	

A4