

RoHS Compliant

Specifications:

Material And Finish:

Insulator:PA9T ,UL94V-0

Contact:Brass

Rating:

Current Rating:9A AC/DC

Voltage Rating:250V AC/DC

Operating Temperature Range:-40°~+105°C

Electrical:

Contact resistance:10m Ohm Max

Insulator resistance:1000M ohm min.

Withstanding Voltage:1500V AC/Minute

Ordering Information

A30002S-16Q-01-BX

1 2 3 4 56

1: — Series No.

2: — R: Straight Type

3: — No. of Positions







4: — Q: Tin Plated

5: — B: Black

6: — A: In Bag

B: In Tube

C: In Tray

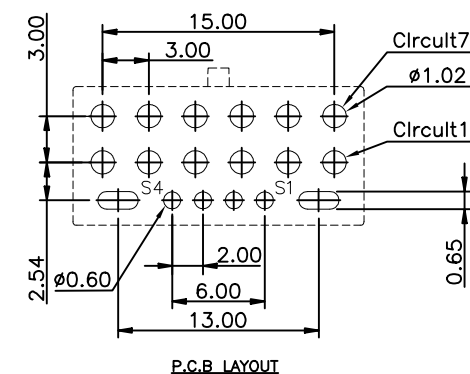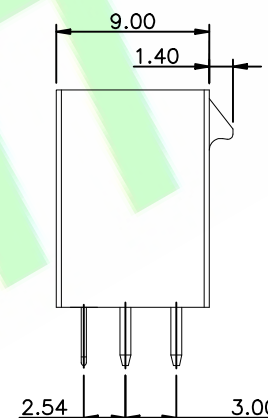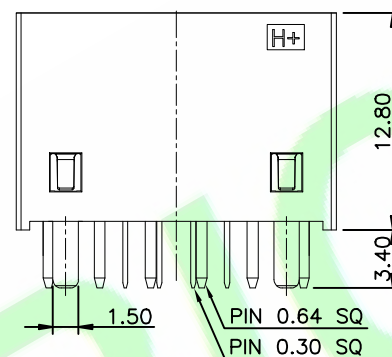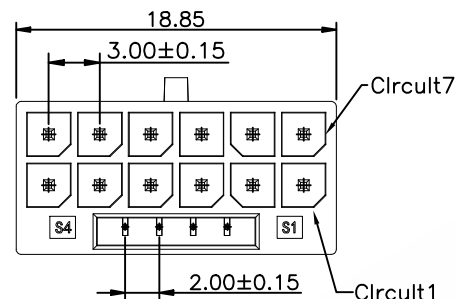

DR.BY.: Jamin	GENERAL TOLERANCE:		PART NO : A30002S-16Q-01-BX	
	LINEAR	ANGLES	DWG. NO.:	
CHKD.: Judyann	X.:	X': ±3.0°	TITLE :	
	X.X: ±0.30	X.X':	3.00&2.00mm Pitch Wafer Straight Type	
APPD.: Billy	X.XX: ±0.25	X.XX':	DATE: 13-May-2023	
	X.XXX: ±0.15	X.XXX':		

HJBRIGHT 東莞市華晶電子有限公司
BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 1/1

SCALE: 1:1

UNIT: mm



THIRD ANGLE PROJECTION

A4

1X	ORIGINAL	Jamin	
REV.	DESCRIPTION	DR.BY	ECN. NO.