

Specifications:

Material And Finish:

Insulator:Nylon UL94V-0 Color:Black

Contact:Brass

Plated:See Ordering Information

Rating:

Current Rating:9.0 Amp

Voltage Rating:250V AC/DC

Operating Temperature

Range:-40°~+105°C

Electrical:

Contact resistance:20m Ohm Max

Insulator resistance:1000M ohm min.

Withstanding Voltage:800V AC/Minute

Ordering Information

A3003H-XXX-01-X
1 2 3 4 5

1:— Series No.

2:— H:Horizontal Type

3:— No. of Positions

4:— S:Matte Tin Plated

H:Gold Flash on Contact;





Matte Tin On Nail

5:— A:In Bag

B:In Tube

C:In Tray

G:Tape&Reel

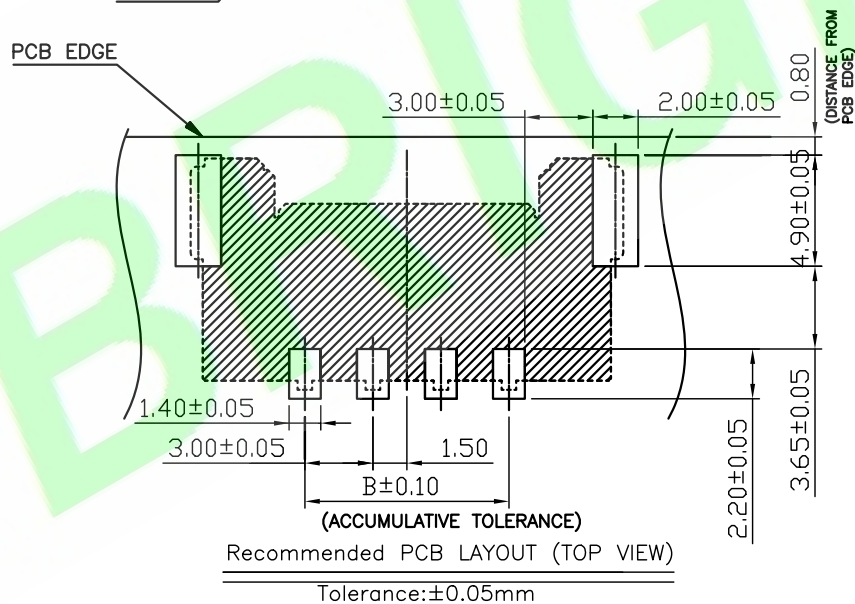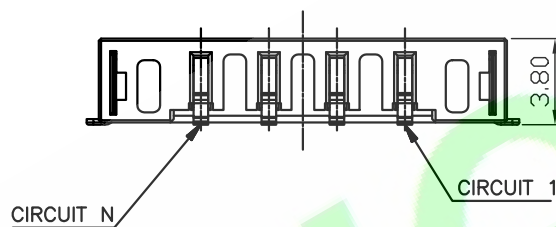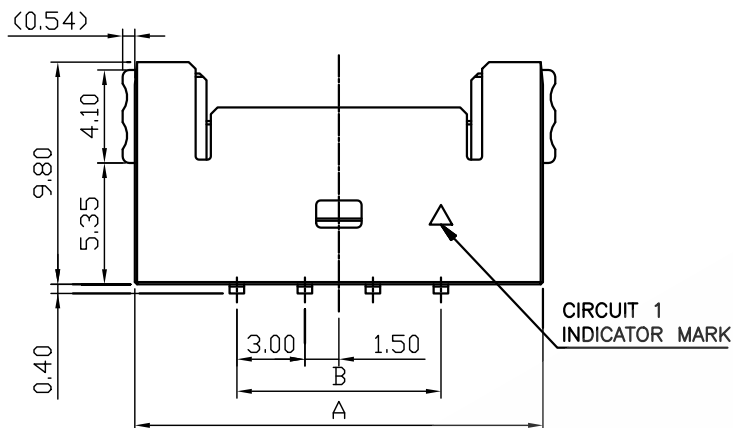

RoHS Compliant
Automobile
Product

No. of Positions	A	B
2	12	3
3	15	6
4	18	9
5	21	12
6	24	15

5X				DR.BY.: Zolin	GENERAL TOLERANCE:	PART NO : A3003H-XXX-01-X
4X				CHKD.: Hu.CH	LINEAR	DWG. NO.:
3X				APPD.: Billy	ANGLES	TITLE :
2X					X.: ±5.0°	PICO-LOCK3.0 PLUS HEADER ASSEMBLY
1X	ORIGINAL	Zolin			X.X: ±0.20	
REV	DESCRIPTION	DR.BY	ECN. NO.		X.XX: ±0.20	
					X.XXX: ±0.20	
					X.XX: ±3.0°	
					X.XX: ±2.0°	
					X.XXX: ±1.0°	
						DATE: 26-Dec-2024

HJBRIGHT® 东莞市華晶電子有限公司	
BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED	
SHEET: 1/1	THIRD ANGLE PROJECTION
SCALE: 1:1	
UNIT: mm	
A4	