

Specifications:

Material And Finish:

Insulator:Nylon 46 UL94V-0 Color:Black

Contact:Brass

Plated:See Ordering Information

Rating:

Current Rating:3.0 Amp

Voltage Rating:250V AC/DC

Operating Temperature Range:-25~+85°C

Electrical:

Contact resistance:20m Ohm Max

Insulator resistance:1000M ohm min.




Withstanding Voltage:1000V AC/Minute

Ordering Information


A30302R-XXX-04-X

1 2 3 4 5


- 1: — Series No.
- 2: — R:R/A Type
- 3: — No. of Positions
- 4: — A:Gold Flash
Q:Tin Plated
- 5: — A:In Bag
B:In Tube
C:In Tray

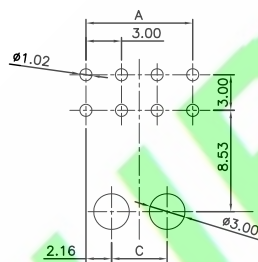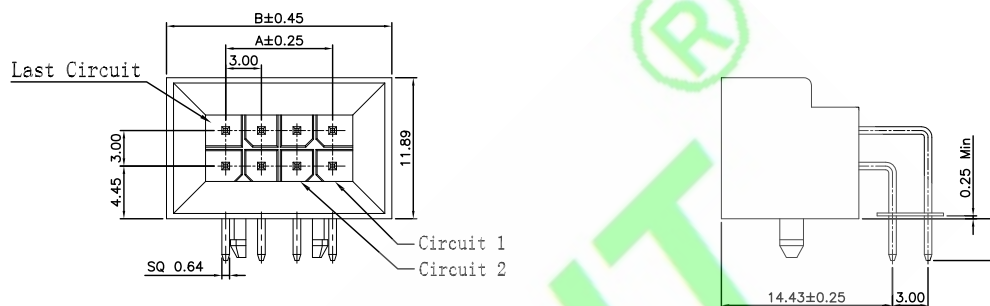

P.C.B LAYOUT: TOP VIEW
TOLERANCE: ±0.05mm
Poles: 08P~24P



P.C.B LAYOUT: TOP VIEW
Poles: 04P



P.C.B LAYOUT: TOP VIEW
Poles: 06P

Circuits	Dimension mm		
	A	B	C
04	3.00	13.00	
06	6.00	16.00	
08	9.00	19.00	4.68
10	12.00	22.00	7.68
12	15.00	25.00	10.68
14	18.00	28.00	13.68
16	21.00	31.00	16.68
18	24.00	34.00	19.68
20	27.00	37.00	22.68
22	30.00	40.00	25.68
24	33.00	43.00	28.68

5X				DR.BY.:	GENERAL TOLERANCE:		PART NO : A30302R-XXX-04-X
4X				Tsw	LINEAR	ANGLES	DWG. NO.: RD0806-068
3X				CHKD.:	X.: ±0.30	X': ±5.0°	TITLE :
2X				Mark	X.X: ±0.20	X.X': ±3.0°	3.0mm Pitch Wafer R/A Type
1X	ORIGINAL	Tsw		APPD.:	X.XX: ±0.15	X.XX': ±2.0°	DATE: 02-Jul-2021
REV.	DESCRIPTION	DR.BY	ECN. NO.	Billy	X.XXX: ±0.10	X.XXX': ±1.0°	

HJBRIGHT 東莞市華晶電子有限公司
BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 1/1
SCALE: 1:1
UNIT: mm

THIRD ANGLE PROJECTION

A4