









Specifications:
Material And Finish:
Insulator: PBT
Contact: Copper alloy

Rating:
Voltage Rating:
Rated voltage:14V AC/DC
Rated current:22A Max
Operating Temperature Range:-40~+125°C

Electrical:
Contact resistance:10m ohm Max
Insulator resistance:100M ohm min.
Withstanding Voltage:1500V AC/Minute
Sealing:Meets IP6K8,IP6K9K

Ordering Information
A35000R-XXQ-XX-XC
1 2 3 4 5 6 7

- 1: Series No.
2: R/A Type
3: No. of Positions
4: Q: Tin Plated
5: 01:A Type
02:B Type
03:C Type
04:D Type
6: B:Black
LG:Light Gray
DG:Dark Gray
SG:Stone Gray
N:Natural
7: C:In Tray

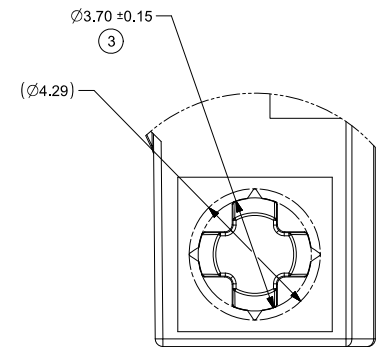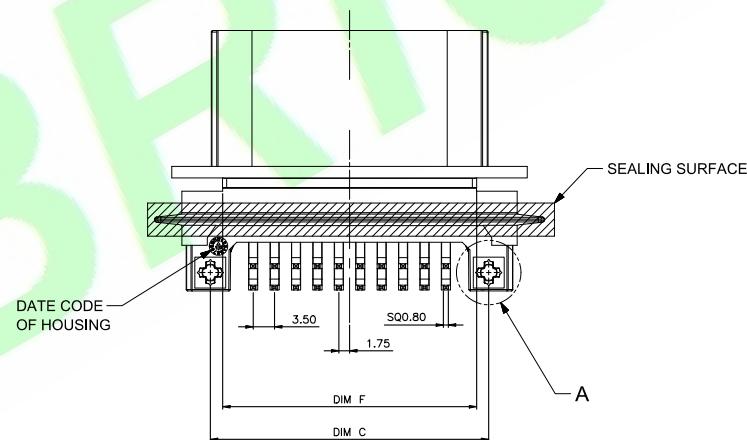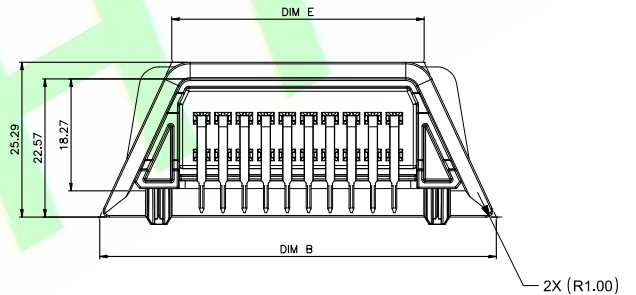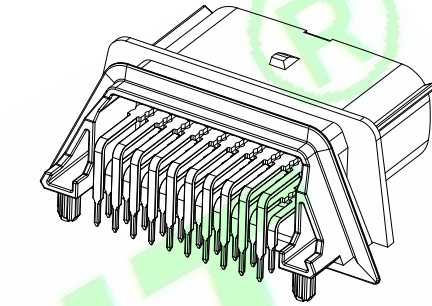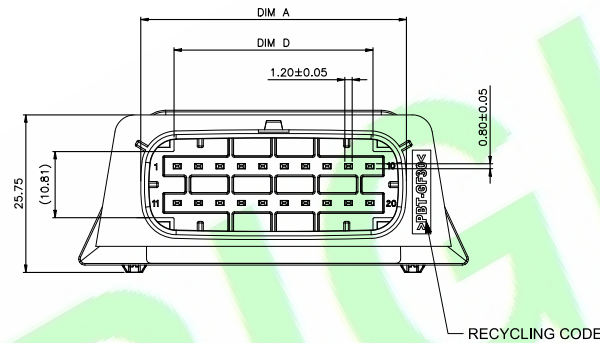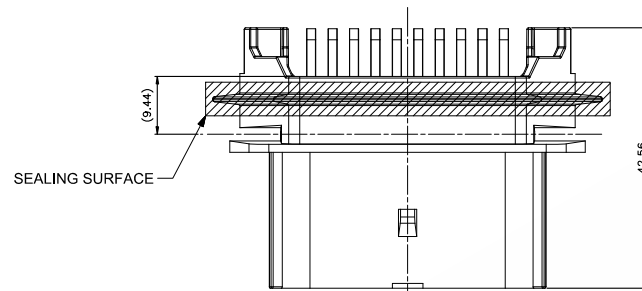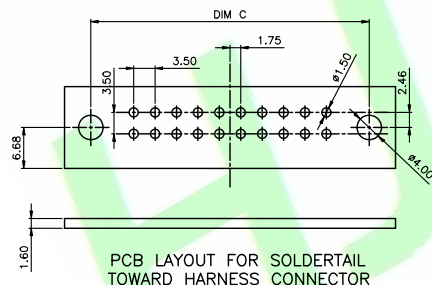

DETAIL A
SCALE 10:1

DR.BY.: Judyyan	GENERAL TOLERANCE:		PART NO : A35000R-XXQ-XX-XC
	LINEAR	ANGLES	
CHKD.: Hu.ch	X.: ±0.30	X': ±5.0°	DWG. NO.:
	X.X: ±0.20	X.X': ±3.0°	
APPD.: Billy	X.XX: ±0.10	X.XX': ±2.0°	TITLE : MX150 Dual Row R/A HEADER Assembly
	X.XXX: ±0.10	X.XXX': ±1.0°	
DATE: 09-Oct-2023			


HJBRIGHT 東莞市華晶電子有限公司
BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 1/3
SCALE: 1:1
UNIT: mm


THIRD ANGLE PROJECTION

A4


1X	ORIGINAL	Judyyan	
REV.	DESCRIPTION	DR.BY	ECN. NO.




4P




6P




4P




4P

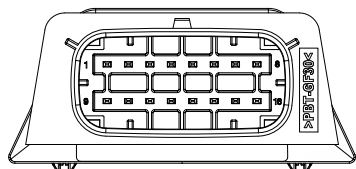

16P

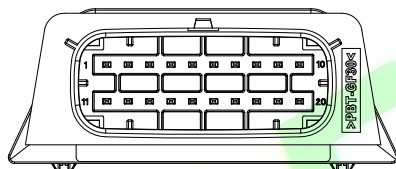

20P

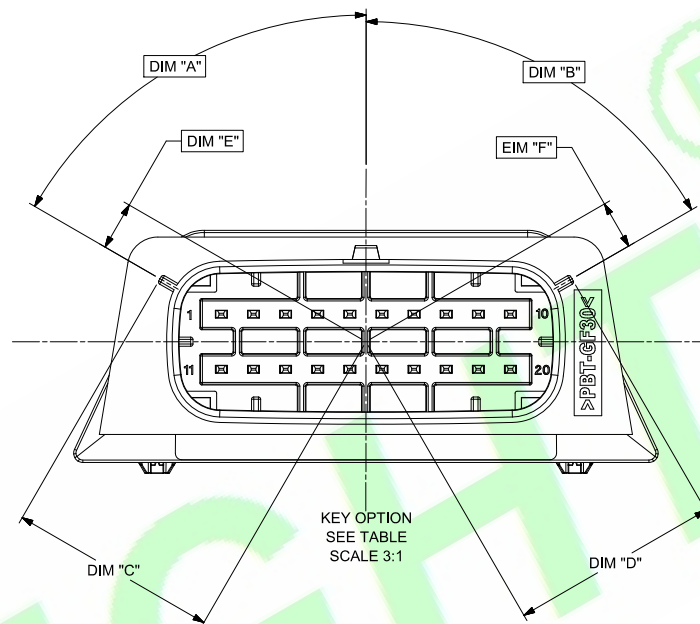

No.	Densions(mm)					
	A	B	C	D	E	F
04P	15.40	36.83	17.50	4.53	13.24	13.54
06P	18.90	40.33	21.00	8.03	16.74	17.04
08P	22.40	43.83	24.50	11.53	20.24	20.54
12P	24.90	50.83	31.50	18.53	27.24	27.54
16P	36.40	57.83	38.50	25.53	34.24	34.54
20P	43.40	64.83	45.50	32.53	41.24	41.54

DR.BY.:
JudyyanCHKD.:
Hu.chAPPD.:
Billy

GENERAL TOLERANCE:

LINEAR	ANGLES
X: ±0.30	X°: ±5.0°
X.X: ±0.20	X.X°: ±3.0°
X.XX: ±0.10	X.XX°: ±2.0°
X.XXX: ±0.10	X.XXX°: ±1.0°

PART NO : A35000R-XXQ-XX-XC

DWG. NO.:

TITLE :
MX150 Dual Row R/A HEADER
Assembly


DATE: 09-Oct-2023

HJBRIGHT® 東莞市華晶電子有限公司
BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 2/3

SCALE: 1:1


UNIT: mm




THIRD ANGLE PROJECTION

A4


1X	ORIGINAL	Judyyan	
REV.	DESCRIPTION	DR.BY	ECN. NO.




A Type Black




A Type Black




A Type Black




A Type Black




A Type Black

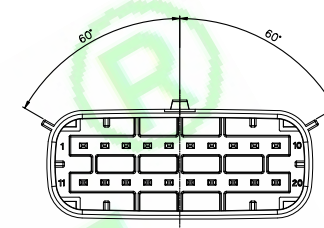


A Type Black




B Type Light Gray




B Type Light Gray




B Type Light Gray




B Type Light Gray

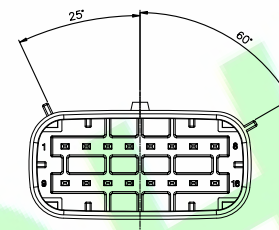


B Type Light Gray

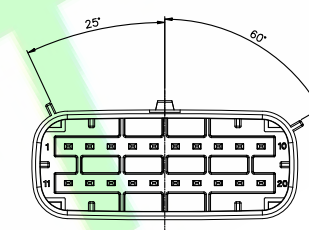


B Type Light Gray or Natural




C Type Drak Gray




C Type Drak Gray




C Type Drak Gray









C Type Drak Gray

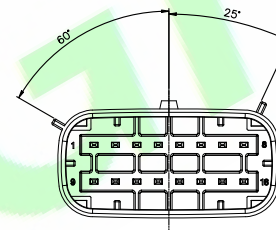

C Type Drak Gray

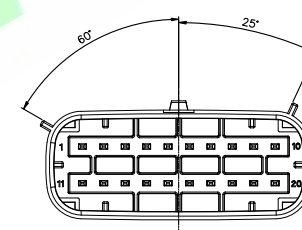

C Type Brown

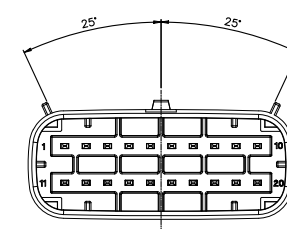D Type Black
4PD Type Black
6PD Type Black
8PD Type Black
12PD Type Black
16PD Type Black or Light Gray
20P

1X	ORIGINAL	Judyyan	
REV.	DESCRIPTION	DR.BY	ECN. NO.

DR.BY.: Judyyan	GENERAL TOLERANCE:		PART NO : A35000R-XXQ-XX-XC
	LINEAR	ANGLES	
CHKD.: Hu.ch	x.: x.x: ±0.30	x': ±5.0° x.x': ±3.0°	DWG. NO.: TITLE : MX150 Dual Row R/A HEADER Assembly
APPD.: Billy	x.xx: ±0.20	x.xx': ±2.0°	
	x.xxx: ±0.10	x.xxx': ±1.0°	
	DATE: 09-Oct-2023		

HJBRIGHT® 東莞市華晶電子有限公司
BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 3/3
SCALE: 1:1
UNIT: mm



THIRD ANGLE PROJECTION

A4