

Specifications:

Material And Finish:

Insulator:PBT UL94V-0 Color:GRAY

Contact:Copper Alloys

Plated:See Ordering Information

Rating:

Current Rating:5.0 A (Signal Pin)

15.0 A (Power Pin)

Operating Temperature Range:-40°C~+105°C

Electrical:

Contact resistance:20m Ohm Max







Insulator resistance:100M ohm min.

Withstanding Voltage:1000V AC/Minute

Ordering Information

A35008R-26Q-01-C
1 2 3 4 5

- 1: — Series No.
2: — R:R/A Type
3: — No. of Positions
4: — Q: Tin Plated
5: — C: In Tray

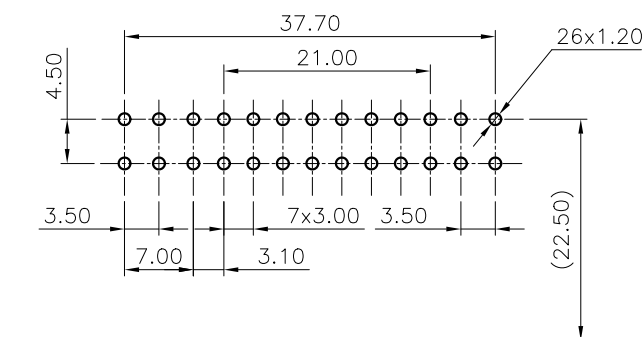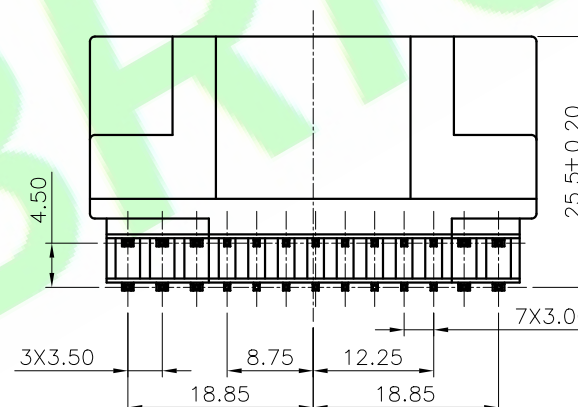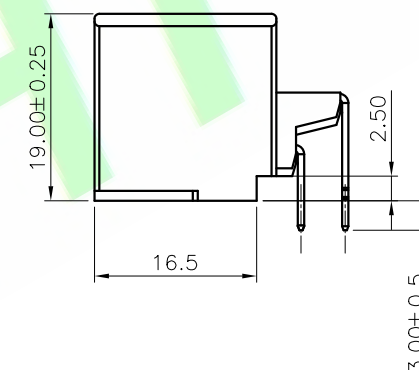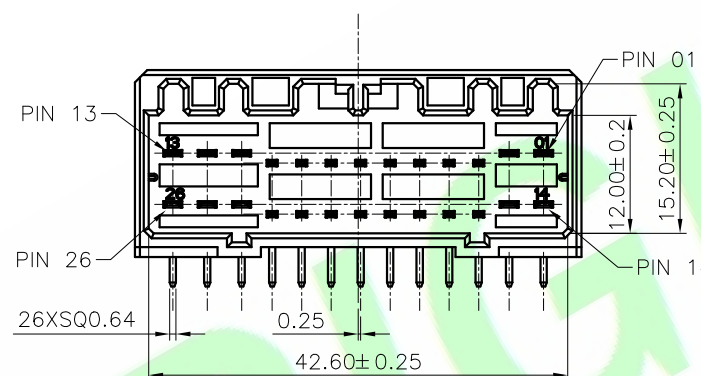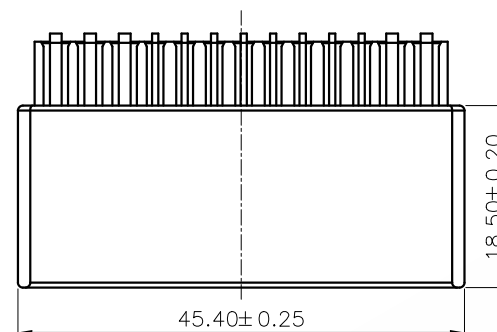

PCB LAYOUT (TOP VIEW)

Tolerance:±0.05mm

PCB EDGE

5X				DR.BY:		GENERAL TOLERANCE:	PART NO : A35008R-26Q-01-C	HJBRIGHT® 东莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED	
4X				Hu.CH		LINEAR	DWG. NO.:		
3X				CHKD.:		ANGLES	TITLE :	SHEET: 1/1 SCALE: 1:1 UNIT: mm	
2X				Sam		x.: ±5.0°	26PIN WAFER R/A Type		
1X	ORIGINAL		Hu.CH	APPD.:		x.x: ±0.30	DATE: 26-Nov-2024	THIRD ANGLE PROJECTION A4	
REV.	DESCRIPTION	DR.BY	ECN. NO	Billy		x.xx: ±0.20			
						x.xxx: ±0.10			
						x.xxx: ±1.0°			