

Specifications:

Material And Finish:

Insulator:PBT+30%GF Color:Black

Contact:Copper Alloy

Plated:See Ordering Information

Rating:

Current Rating:10 Amp/Pin

Voltage Rating:14V DC

Operating Temperature

Range:−40°~+125°C

Electrical:

Contact resistance:30m Ohm Max

Insulator resistance:500M ohm min.

Withstanding Voltage:500V AC/Minute

Ordering Information

A35008S-12S-01-C









1:—Series No.

2:—S:Straight Type

3:—No. of Positions

4:—S:Matte Tin Plated


5:—C:In Tray

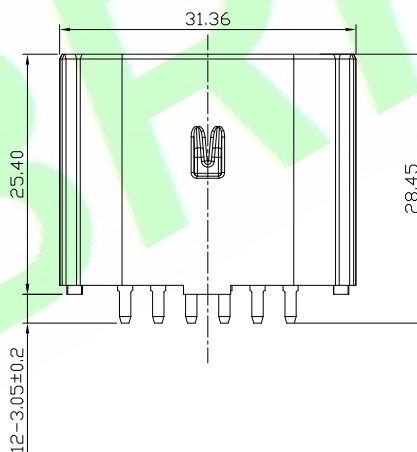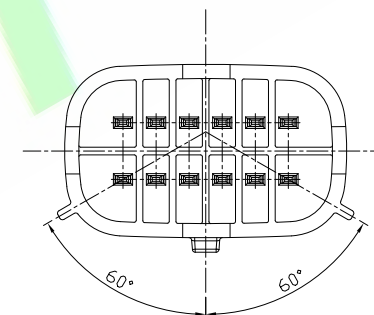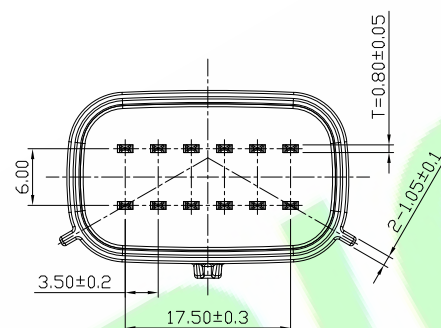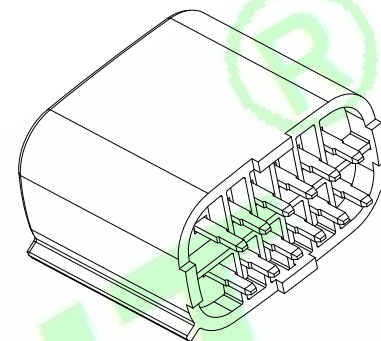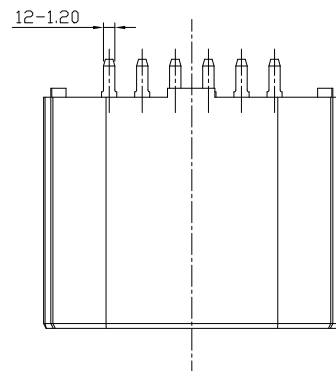

PCB LAYOUT (TOP VIEW)

Tolerance:±0.05mm

5X				DR.BY:	GENERAL TOLERANCE:		PART NO : A35008S-12S-01-C
4X				Hu.CH	LINEAR	ANGLES	DWG. NO.:
3X				CHKD.:	x.:	x': ±5.0°	TITLE :
2X				Hu.CH	x.x: ±0.40	x.x': ±3.0°	12PIN Double Row 3.5PITCH WAFER
1X	ORIGINAL	Hu.CH		APPD.:	x.xx: ±0.25	x.xx': ±2.0°	DATE: 10-Apr-2024
REV.	DESCRIPTION	DR.BY	ECN. NO.	Billy	x.xxx: ±0.15	x.xxx': ±1.0°	

HJBRIGHT® 東莞市華晶電子有限公司		
BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED		
SHEET: 1/1		A4
SCALE: 1:1		
UNIT: mm		
THIRD ANGLE PROJECTION		