
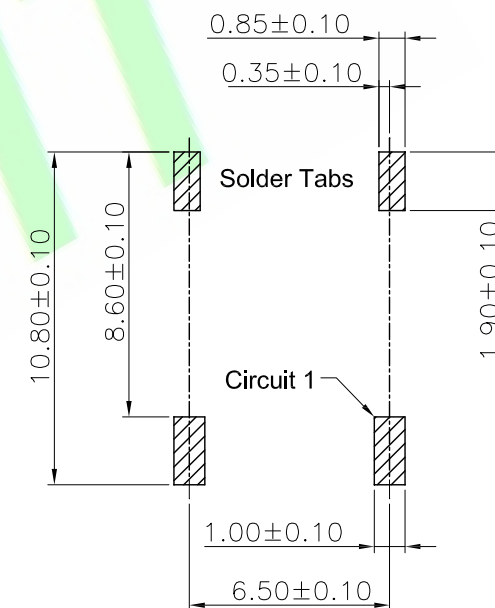



RoHS Compliant



Specifications:
Material And Finish:
Insulator:PA6T UL94V-0 Color:Natural
Contact:Brass
Plated:See Ordering Information

Rating:
Current Rating:1.0 Amp
Voltage Rating:1400V AC/DC
Operating Temperature Range:-40°~+105°C

Electrical:
Contact resistance:10m Ohm Max
Insulator resistance:1000M ohm min.
Withstanding Voltage:3800V AC/Minute

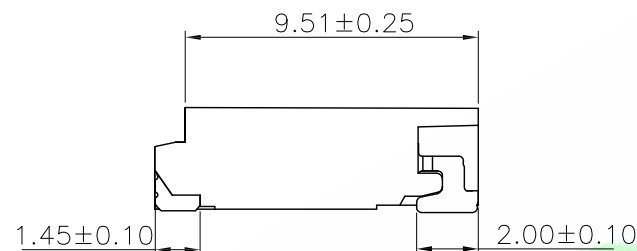

Ordering Information
A3500H-XXX-01-X
1 2 3 4 5

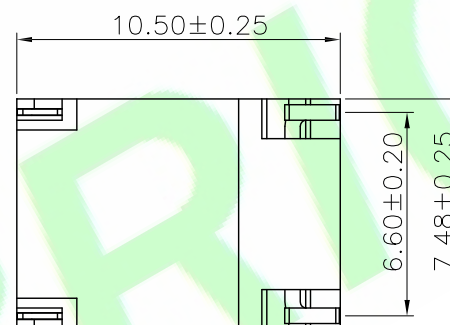

- 1: Series No.
2: H:Horizontal SMT Type
3: No. of Positions
4: A:Glod flash
Q:Tin Plated
5: A:In Bag
C:In Tray

P.C.B LAYOUT

5X				DR.BY.: Tsw	GENERAL TOLERANCE:		PART NO : A3500H-XXX-01-X	HJBRIGHT® 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED								
4X						LINEAR	ANGLES					DWG. NO.:				
3X				CHKD.: Aren	X.:	X': ±1.0°	TITLE : 3.5mm Series connector	SHEET: 1/1			A4					
2X					X.X: ±0.35	X.X':		SCALE: 1:1								
1X	ORIGINAL	Tsw		APPD.:	X.XX: ±0.25	X.XX':		UNIT: mm	THIRD ANGLE PROJECTION							
REV.	DESCRIPTION	DR.BY	EDN. NO.	Billy	X.XXX: ±0.10	X.XXX':	DATE: 30-Aug-2021									
1			2		3		4		5		6		7		8	