

RoHS Compliant

Specifications:
Material And Finish:
Insulator:PA6T UL94V-0 Color:Natural
Contact:Brass
Plated:See Ordering Information


Rating:
Current Rating:1.0 Amp
Voltage Rating:1400V AC/DC
Operating Temperature Range:-40°~+105°C


Electrical:
Contact resistance:10m Ohm Max
Insulator resistance:1000M ohm min.
Withstanding Voltage:3800V AC/Minute

Ordering Information

A3500R - XXX - 01 - X
1 2 3 4 5

1:——— Series No.
2:——— R:R/A Type
3:——— No. of Positions
4:——— A:Glod flash
 Q:Tin Plated
5:——— A:In Bag
 C:In Tray

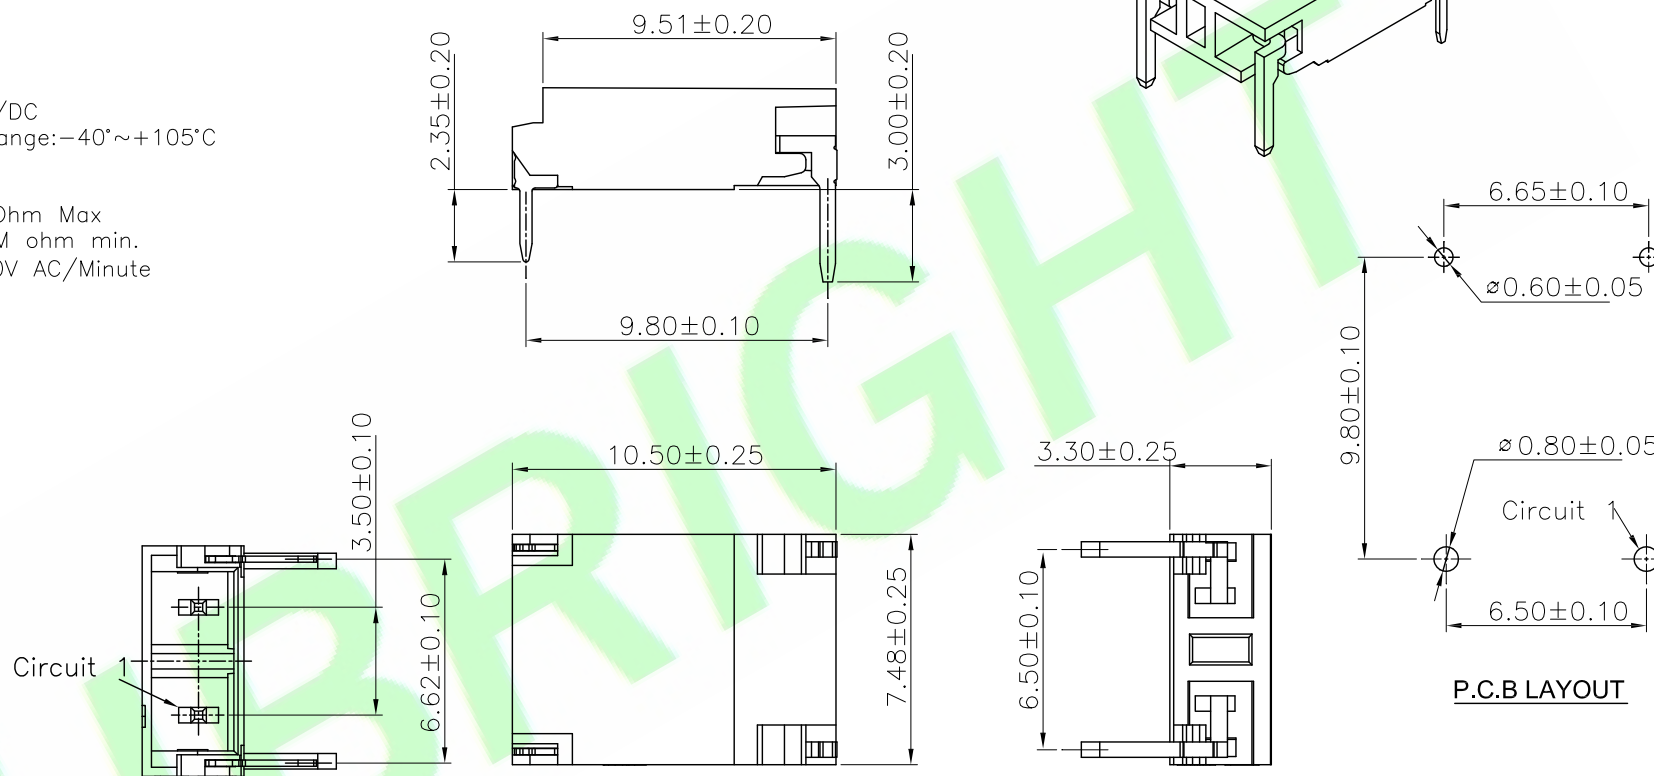

5X				DR.BY.: Tsw	GENERAL TOLERANCE:		PART NO : A3500R-XXX-01-X	HJBRIGHT® 东莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED							
4X					LINEAR	ANGLES	DWG. NO.:								
3X				CHKD.: Aren	X.:	X*: ±1.0°	TITLE : 3.5mm Series connector	SHEET: 1/1			A4				
2X					X.X: ±0.35	X.X*:		SCALE: 1:1							
1X	ORIGINAL	Tsw		APPD.: Billy	X.XX: ±0.25	X.XX*:		UNIT: mm	THIRD ANGLE PROJECTION						
REV	DESCRIPTION	DR.BY	ECL. NO.		X.XXX: ±0.10	X.XXX*:	DATE: 30-Aug-2021								
1		2		3		4		5		6		7		8	