

RoHS Compliant








Specifications:
Material And Finish:
Insulator:PBT
Contact:Brass

Rating:
Current Rating:10.0 Amp
Voltage Rating:12V AC/DC
Operating Temperature Range:-40°~+125°C

Electrical:
Contact resistance:10m Ohm Max
Insulator resistance:100M ohm min.
Withstanding Voltage:1800V AC/Minute

Ordering Information
A35012R-14X-01-NC
1 2 3 4 56

- 1: — Series No.
2: — R:R/A Type
3: — No. of Positions
4: — S:Matte Tin Plated
Q: Tin Plated
5: — N: Natural
6: — B:In Tube
C:In Tray

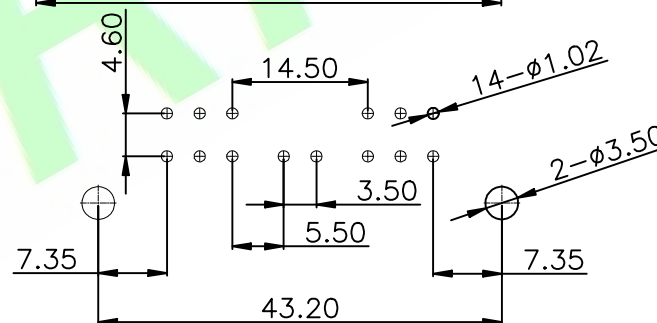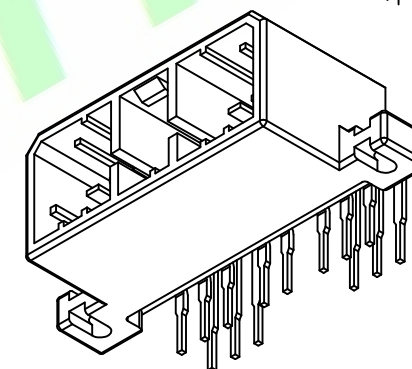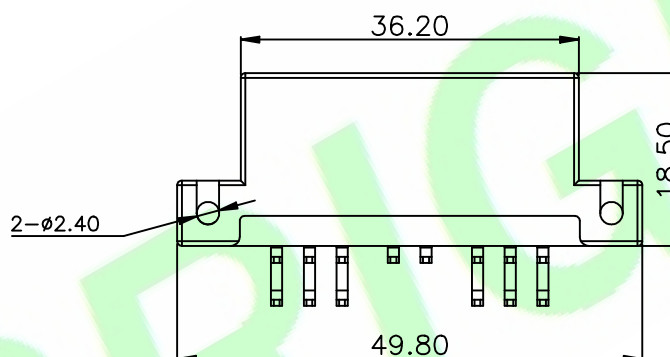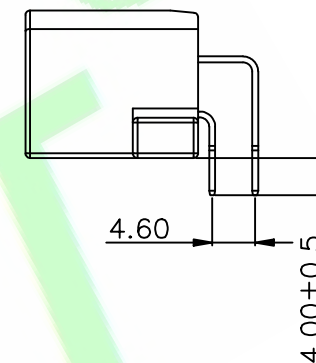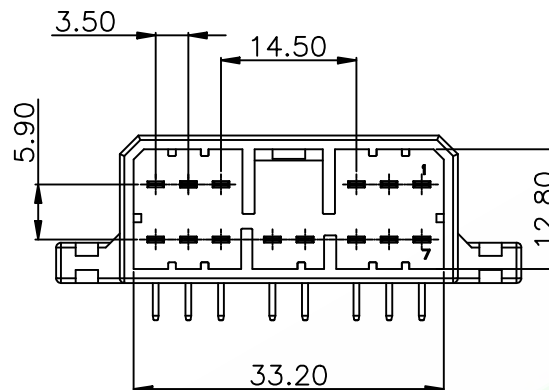

Recommended PCB Layout

DR.BY.: Tony.Zou	GENERAL TOLERANCE:		PART NO : A35012R-14X-01-NC	HJBRIGHT® BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED 東莞市華晶電子有限公司				
	LINEAR	ANGLES					DWG. NO.:	
CHKD.: Hu.Ch	x.: ±0.30	x': ±3.0°	TITLE : 3.5mm Pitch Pin Heder R/A Type	SHEET: 1/1		A4		
	x.x: ±0.20	x.x':		SCALE: 1:1				
APPD.: Billy	x.xx: ±0.15	x.xx':		DATE: 18-Jun-2021			UNIT: mm	THIRD ANGLE PROJECTION
	x.xxx: ±0.10	x.xxx':						

1X	ORIGINAL	Tony.Zou	ECN. NO.
REV	DESCRIPTION	DR.BY	