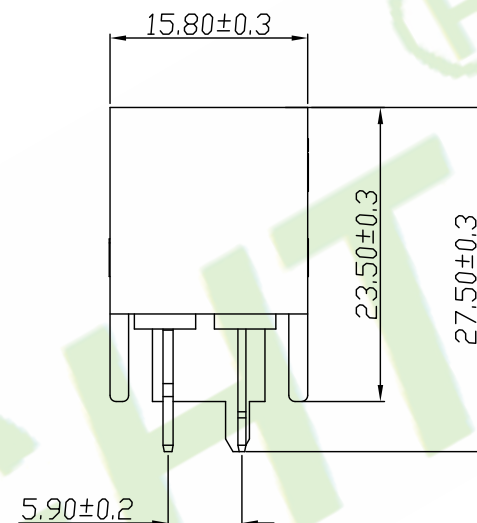
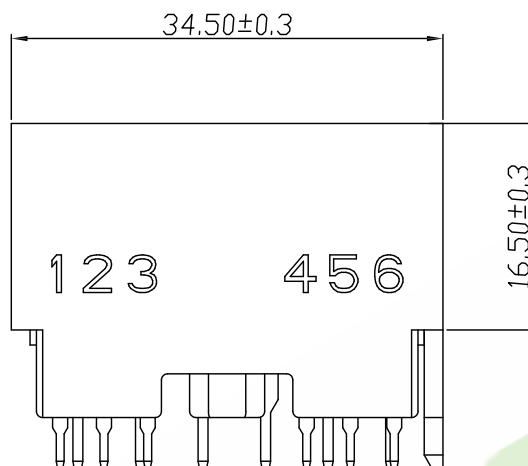


7
oHS C



Plated: See Ordering Information

Operating Temperature Range: $-30^{\circ}\text{C} \sim +105^{\circ}\text{C}$

Withstanding Voltage:1800V AC/Minute


$$\overline{1} \quad \overline{2} \quad \overline{3} \quad \overline{4} \quad \overline{5}$$

- 1:— Series No.
2:— S:Straight Type
3:— No. of Positions
4:— A:Gold Flash
Q:Tin Plated
5:— B:In Tube
C:In Tray

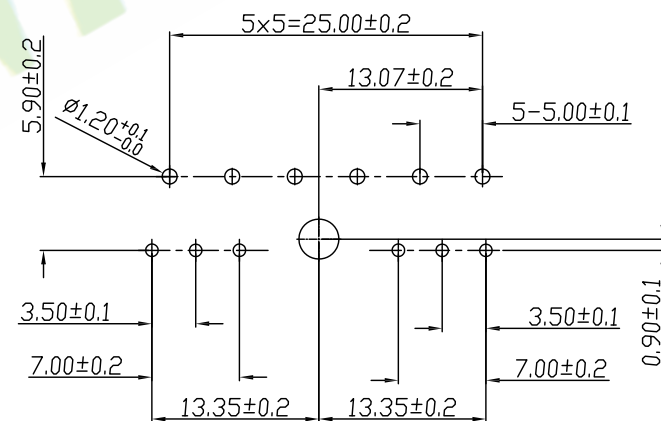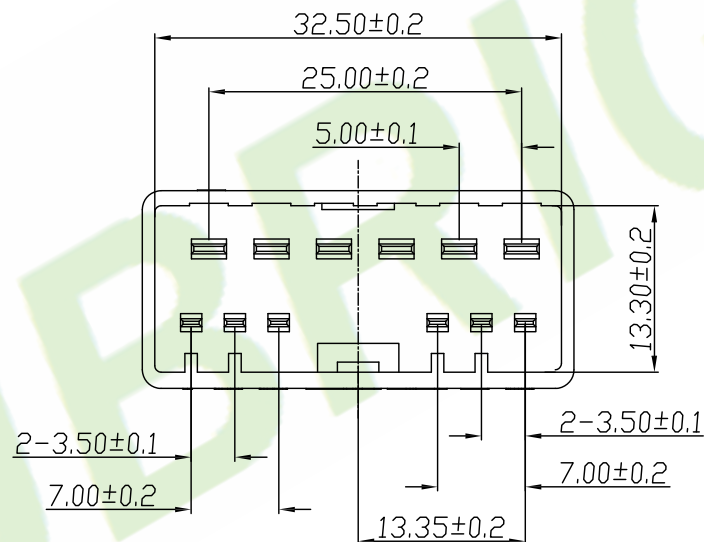

PCB LAYOUT

5X				DR.BY.: Samson	GENERAL TOLERANCE:		PART NO : A35012S-12X-02-X	HJBRIGHT® 东莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED		
4X					LINEAR	ANGLES				
3X				CHKD.: Tony	X.:	X': ±3.0°	TITLE :			
2X	Update code options	Judyyan	20221223		X.X: ±0.30	X.X': ±1.0°				
1X	ORIGINAL	Samson		APPD.: Billy	X.XX: ±0.20	X.XX': ±0.5°	SHEET: 1/1		A4	
REV.	DESCRIPTION	DR.BY	ECN. NO.		X.XXX: ±0.10	X.XXX': ±	DATE: 30-Aug-2021			SCALE: 1:1

A4