

RoHS Compliant



Specifications.

Material And Finish:

Insulator:PBT UL94V-0 Color: White

Contact:Brass

Plated:See Ordering Information

Rating.

Current Rating:10.0 Amp(16AWG)

Voltage Rating:12V AC/DC

Operating Temperature Range:-30°C~+105°C

Electrical:

Contact resistance:20m Ohm Max

Insulator resistance.100M ohm min

Withstanding Voltage:1800VAC/Minute

Ordering Information

A35012S-20X-01-C

1 2 3 4 5

1: — Series No.






2: — S: Straight Type

3: — No. of Positions

4: — S: Matte Tin Plated

Q: Tin Plated

5: — C: In Tray

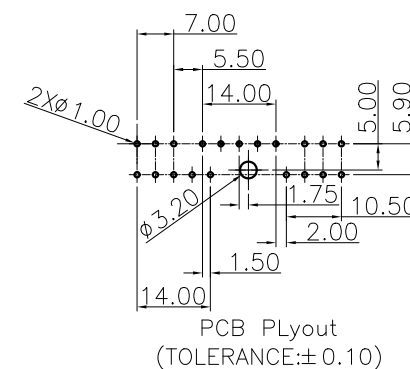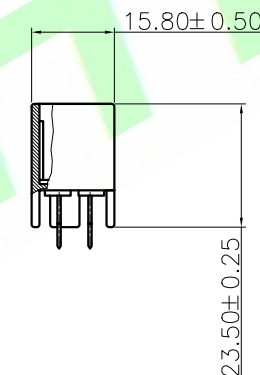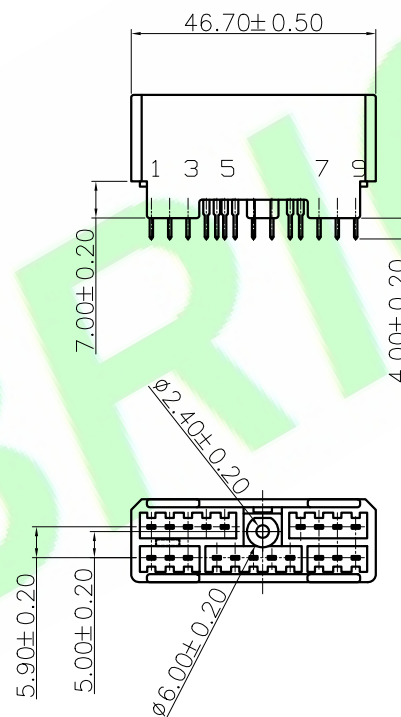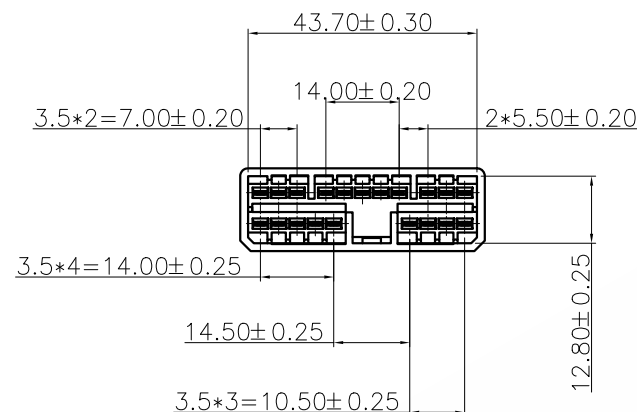

DR.BY.: JoinZm	GENERAL TOLERANCE:		PART NO : A35012S-20X-01-C	
	LINEAR	ANGLES	DWG. NO.:	
	x.: ±0.38	x': ±2.0°	TITLE :	
	CHKD.: Judyyan	x.x: ±0.35	A35012 Series PCB Header Straight Type	
	APPD.: Billy	x.xx: ±0.25	DATE: 29-May-2024	
		x.xxx: ±0.15		
		x.xxx': ±0.5°		

HJBRIGHT® 東莞市華晶電子有限公司
BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 1/1
SCALE: 1:1
UNIT: mm



THIRD ANGLE PROJECTION

A4

1X	ORIGINAL	JoinZm	
REV.	DESCRIPTION	DR.BY	ECN. NO